Vishay Siliconix


R-C Thermal Model Parameters

DESCRIPTION

The parametric values in the R-C thermal model have been derived using curve-fitting techniques. R-C values for the electrical circuit in the Foster/tank and Cauer/filter configurations are included. When implemented in P-SPICE, these values have matching characteristic curves to the single-pulse transient thermal impedance curves for the MOSFET.

These RC values can be used in the P-SPICE simulation to evaluate the thermal behavior of the MOSFET junction temperature under a defined power profile. These techniques are described in application note AN609, "Thermal Simulation of Power MOSFETs on the P-SPICE Platform".

R-C THERMAL MODEL FOR TANK CONFIGURATION

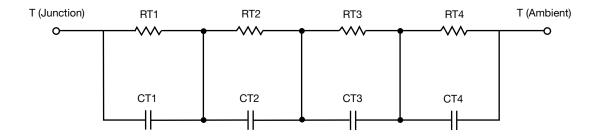

THERMAL RESISTANCE (°C/W)						
Junction to	Ambient	Case	Foot			
RT1	11.9104	91.2745m	N/A			
RT2	3.1921	382.3313m	N/A			
RT3	931.0189m	272.4557m	N/A			
RT4	23.9695	249.8177m	N/A			
	THERMAL CAPAC	ITANCE (Joules/°C)				
Junction to	Ambient	Case	Foot			
CT1	8.2562	13.3634m	N/A			
CT2	1.0641	23.2318m	N/A			
CT3	147.3202m	2.0583m	N/A			
CT4	4.0108	183.7558m	N/A			


Note

• n/a indicates not applicable

This document is intended as a SPICE modeling guideline and does not constitute a commercial product datasheet. Designers should refer to the appropriate datasheet of the same number for guaranteed specification limits.



R-C THERMAL MODEL FOR FILTER CONFIGURATION

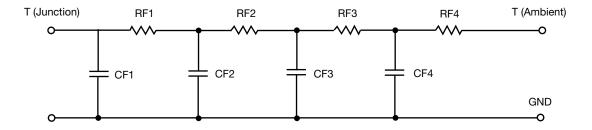

THERMAL RESISTANCE (°C/W)						
Junction to	Ambient	Case	Foot			
RF1	884.7234m	267.8654m	N/A			
RF2	6.5762	225.8855m	N/A			
RF3	23.1425	420.6858m	N/A			
RF4	9.4830	85.7222m	N/A			
	THERMAL CAPACI	TANCE (Joules/°C)				
Junction to	Ambient	Case	Foot			
CF1	24.3391m	1.4182m	N/A			
CF2	882.6174m	3.3200m	N/A			
CF3	1.7594	26.2107m	N/A			
CF4	2.6137	1.3287	N/A			

Note

• n/a indicates not applicable



100us 1.0ms V(RF1:1)j-a

Date: July 18, 2011

100ms

Time Page 1 1.0s

10s

100s

Time: 16:39:27

1.0K


10ms

Vishay Siliconix

10s

1.0s

Time: 17:24:43

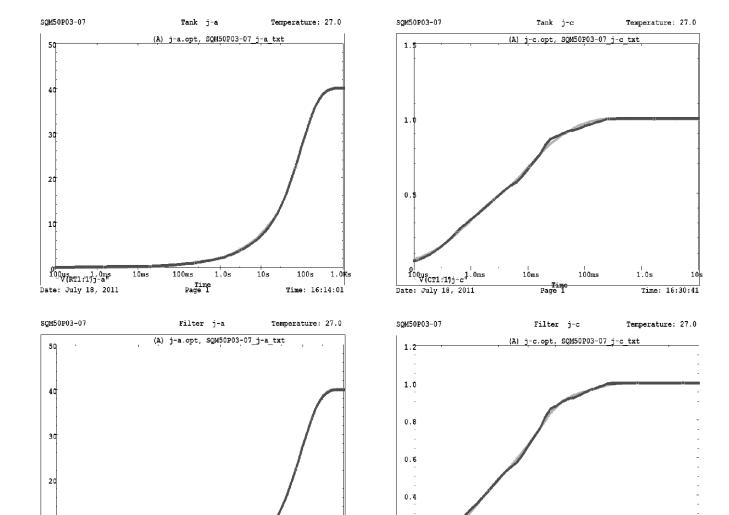

0.2

100us V(CF1:17j-c^{1.0ms}

Date: July 18, 2011

10ms

Time Page I 100ms