



PowerPAK® SO-8L Carrier Tape

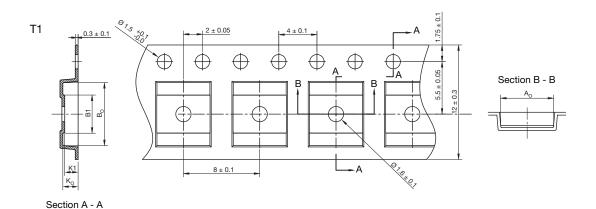

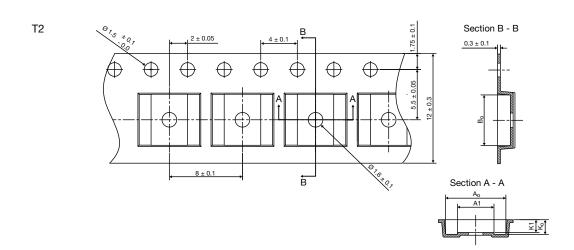

Version	A _O	A1	B _O	B1	K _O	K1	Quantity per reel
T1 / - 1	5.55 ± 0.1	-	6.60 ± 0.1	4 ± 0.15	1.6 ± 0.1	1.4 ± 0.1	3000
T2 / - 2 ^a	6.60 ± 0.1	4 ± 0.15	5.55 ± 0.1	-	1.6 ± 0.1	1.4 ± 0.1	

Notes

- a. Not standard offering. Please contact local sales office for availability.
- $^{(1)}$ 10 sprocket hole pitch cumulative tolerance \pm 0.2 mm.
- (2) Camber not to exceed 1 mm in 100 mm, also not to exceed 1.5 cm in 1 m actually.
- (3) Material: black conductive or black static dissipative.
- $^{(4)}$ A_o and B_o measured on a plane 0.3 mm above the bottom of the pocket.
- (5) K_o measured from a plane on the inside bottom of the pocket to the top surface of carrier.
- (6) It should be measured from:
 - a. sprocket hole to pocket center.
 - b. sprocket hole to pocket hole.
- (7) All size in mm unless specified.
- (8) Tolerance will be \pm 0.1 mm unless specified.
- (9) Vishay part number must be labeled at all reels of carrier tape.
- $^{(10)}$ Surface resistivity: 10^4 to 10^{11} Ω .
- (11) Version suffix as above table shown.

ECN: C15-1433-Rev. F, 02-Nov-15

DWG: 93-5259-X

Revision: 02-Nov-15 1 Document Number: 69632