


Thick Film Chip Resistors, Industrial



FEATURES

- Operating temperature range: - 55 °C to + 150 °C
- Same materials and construction as MIL-PRF-55342 chip resistors
- Termination: Tin/Lead wraparound termination over nickel barrier. Also available with lead (Pb)-free wraparound terminations.
- Capability to develop specific reliability programs designed to customer requirements
- Size, value, packaging and materials can be customized for special customer requirements.
- For zero ohm jumpers, see Vishay Dale's RCWP Jumper data sheet



STANDARD ELECTRICAL SPECIFICATIONS						
GLOBAL MODEL	HISTORICAL MODEL	POWER RATING $P_{70\text{ }^\circ\text{C}}$ W ⁽¹⁾	MAXIMUM OPERATING VOLTAGE	TEMPERATURE COEFFICIENT ppm/°C	TOLERANCE %	RESISTANCE RANGE Ω
RCWP0201	RCWP-0201	0.05	30	300 100, 300	± 5 to ± 10 ± 1 to ± 10	10 to 46.4 47 to 1M
RCWP0502	RCWP-0502	0.05	40	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 9.1 10 to 22M
RCWP0302	RCWP-0302	0.04	15	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 9.1 10 to 22M
RCWP0402	RCWP-0402	0.05	30	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 9.1 10 to 22M
RCWP0603	RCWP-0603	0.10	50	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 5.6 5.62 to 22M
RCWP0540	RCWP-540	0.08	40	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 9.1 10 to 22M
RCWP0550	RCWP-550	0.125	50	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 9.1 10 to 22M
RCWP0575	RCWP-575	0.15	70	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 5.6 5.62 to 22M
RCWP5100	RCWP-5100	0.20	100	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 5.6 5.62 to 22M
RCWP1206	RCWP-1206	0.25	100	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 5.6 5.62 to 22M
RCWP5150	RCWP-5150	0.35	125	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 5.6 5.62 to 22M
RCWP1100	RCWP-1100	0.50	100	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 5.6 5.62 to 22M
RCWP7225	RCWP-7225	0.60	200	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 5.6 5.62 to 22M
RCWP2010	RCWP-2010	0.80	200	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 5.6 5.62 to 22M
RCWP2512	RCWP-2512	1.0	200	300 100, 300	± 2 to ± 10 ± 1 to ± 10	1 to 5.6 5.62 to 22M

Notes

⁽¹⁾ Power rating depends on the max. temperature at the solder point, the component placement density and the substrate material

- Consult factory for extended resistance range



GLOBAL PART NUMBER INFORMATION


New Global Part Numbering: RCWP510010K0GMWB (preferred part numbering format)

R **C** **W** **P** **5** **1** **0** **0** **1** **0** **K** **0** **G** **M** **W** **B**


GLOBAL MODEL	RESISTANCE VALUE	TOLERANCE CODE	TEMPERATURE COEFFICIENT	PACKAGING CODE	SPECIAL
(see Standard Electrical Specifications table)	R = Decimal K = Thousand M = Million 10R0 = 10 Ω 1K30 = 1.3 kΩ 1M00 = 1.0 MΩ 0000 = 0 Ω Jumper	F = ± 1 % G = ± 2 % J = ± 5 % K = ± 10 % Z = 0 Ω Jumper	K = 100 ppm M = 300 ppm S = Special, 0 Ω Jumper	TP = Tin/Lead, T/R (Full) S3 = Tin/Lead, T/R (1000 pieces) WB = Tin/Lead, Tray S2 = Tin/Lead, T/R (500 pieces) S6 = Tin/Lead, T/R (300 pieces) EA = Lead (Pb)-free, T/R (Full) EB = Lead (Pb)-free, T/R (1000 pieces) ET = Lead (Pb)-free, Tray EC = Lead (Pb)-free, T/R (500 pieces) ED = Lead (Pb)-free, T/R (300 pieces)	Blank = Standard (Dash Number) (up to 2 digits) From 1 - 99 as applicable 99 = 0 Ω Jumper

Historical Part Number: RCWP-5100103G (will continue to be accepted)

RCWP-5100	103	G	T03
HISTORICAL MODEL	RESISTANCE VALUE	TOLERANCE CODE	PACKAGING CODE

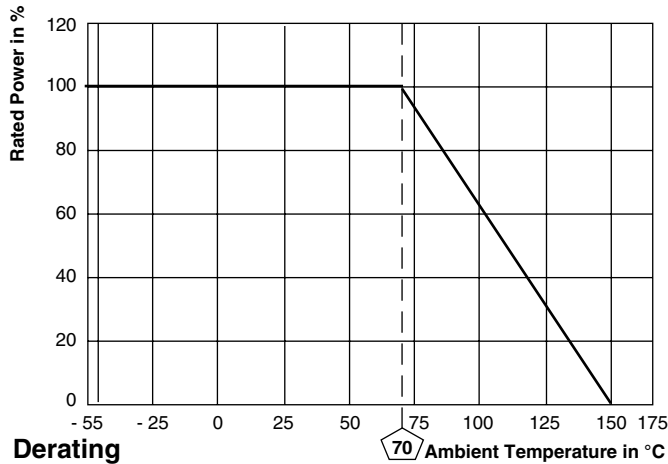

DIMENSIONS in inches [millimeters]



GLOBAL MODEL	A (Length)	B (Width)	C (Height)	D (Top Term)	E (Bottom Term)
RCWP0201	0.024 ± 0.002 [0.60 ± 0.05]	0.012 ± 0.002 [0.30 ± 0.05]	0.009 ± 0.002 [0.23 ± 0.05]	0.006 ± 0.003 [0.15 ± 0.07]	0.006 + 0.002 - 0.004 [0.15 + 0.05 - 0.10]
RCWP0302	0.034 ± 0.004 [0.86 ± 0.10]	0.021 ± 0.003 [0.53 ± 0.08]	0.015 ± 0.003 [0.38 ± 0.08]	0.007 ± 0.005 [0.18 ± 0.13]	0.008 ± 0.005 [0.20 ± 0.13]
RCWP0402	0.039 ± 0.003 [0.99 ± 0.08]	0.020 ± 0.003 [0.51 ± 0.08]	0.013 ± 0.003 [0.33 ± 0.08]	0.010 ± 0.005 [0.25 ± 0.13]	0.010 ± 0.005 [0.25 ± 0.13]
RCWP0502	0.055 ± 0.005 [1.40 ± 0.13]	0.023 ± 0.003 [0.58 ± 0.08]	0.015 ± 0.003 [0.38 ± 0.08]	0.010 ± 0.005 [0.25 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]
RCWP0540	0.055 ± 0.005 [1.40 ± 0.13]	0.040 ± 0.005 [1.02 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.010 ± 0.005 [0.25 ± 0.13]	0.010 ± 0.005 [0.25 ± 0.13]
RCWP0550	0.055 ± 0.005 [1.40 ± 0.13]	0.050 ± 0.005 [1.27 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.010 ± 0.005 [0.25 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]
RCWP0575	0.080 ± 0.005 [2.03 ± 0.13]	0.050 ± 0.005 [1.27 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]
RCWP0603	0.063 ± 0.005 [1.60 ± 0.13]	0.032 ± 0.005 [0.81 ± 0.13]	0.018 ± 0.005 [0.46 ± 0.13]	0.012 ± 0.005 [0.31 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]
RCWP1100	0.105 ± 0.005 [2.67 ± 0.13]	0.100 ± 0.005 [2.54 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]
RCWP1206	0.125 ± 0.005 [3.18 ± 0.13]	0.063 ± 0.005 [1.60 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]
RCWP2010	0.197 ± 0.006 [5.00 ± 0.15]	0.098 ± 0.005 [2.49 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]
RCWP2512	0.250 ± 0.006 [6.35 ± 0.15]	0.124 ± 0.005 [3.15 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]
RCWP5100	0.105 ± 0.005 [2.67 ± 0.13]	0.050 ± 0.005 [1.27 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]
RCWP5150	0.155 ± 0.005 [3.94 ± 0.13]	0.050 ± 0.005 [1.27 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]	0.015 ± 0.005 [0.38 ± 0.13]
RCWP7225	0.230 ± 0.005 [5.84 ± 0.13]	0.075 ± 0.005 [1.91 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]	0.020 ± 0.005 [0.51 ± 0.13]



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.