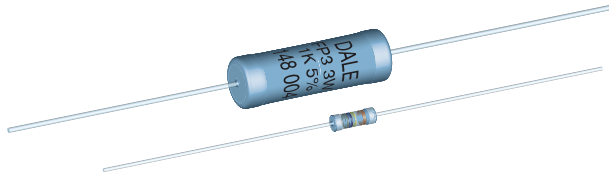


Metal Film Resistors, Industrial, Flameproof



FEATURES

- Small physical size
- Low cost
- FP resistors have the ability to withstand overloads up to 100 times rated power without any trace of flame
- Exceptional frequency characteristics
- Especially suited for circuitry where functions, environments and duty cycles demand power resistors
- Electroplated tin-lead or lead (Pb)-free solder finish leads
- Tighter tolerances available on request
- Compliant to RoHS Directive 2002/95/EC



RoHS*
COMPLIANT

Note

* Pb containing terminations are not RoHS compliant, exemptions may apply

| STANDARD ELECTRICAL SPECIFICATIONS | | | | | | | | |
|------------------------------------|------------------|---|---|---|----------------------------------|------------------------------|-----------------------|--|
| GLOBAL MODEL | HISTORICAL MODEL | POWER RATING $P_{25^{\circ}\text{C}}$ W | POWER RATING $P_{40^{\circ}\text{C}}$ W | POWER RATING $P_{70^{\circ}\text{C}}$ W | MAXIMUM WORKING VOLTAGE (1) V | RESISTANCE RANGE Ω | TOLERANCE $\pm \%$ | TEMPERATURE COEFFICIENT $\pm \text{ppm}/^{\circ}\text{C}$ |
| FP01/2 | FP1/2 | - | - | 0.5 | 350 | 10 to 1M | 1, 2, 5, 10 | 150 |
| FP0001 | FP1 | - | - | 1 | 500 | 10 to 1M | 1, 2, 5, 10 | 150 |
| FP0032 | FP32 | - | - | 1 | 500 | 10 to 1M | 1, 2, 5, 10 | 150 |
| FP0002 | FP2 | 3.5 | 3 | 2 | 500 | 25 to 125K | 1, 2, 5, 10 | 150 |
| FP0042 | FP42 | - | - | 2 | 500 | 25 to 125K | 1, 2, 5, 10 | 150 |
| FP0003 | FP3 | 4 | 4 | 3 | 500 | 22 to 125K | 1, 2, 5, 10 | 150 |
| FP0004 | FP4 | 5.5 | 5 | 4 | 500 | 70 to 125K | 1, 2, 5, 10 | 150 |
| FP0005 | FP5 | 6.5 | 6 | 5 | 600 | 70 to 125K | 1, 2, 5, 10 | 150 |
| FP0007 | FP7 | 7.5 | - | 7 | 700 | 25 to 125K | 1, 2, 5, 10 | 150 |
| FP0010 | FP10 | - | 10 | - | 700 | 25 to 125K | 1, 2, 5, 10 | 150 |
| FP0067 | FP67 | 5 | - | - | 500 | 35 to 19K | 1, 2, 5, 10 | 150 |
| FP0069 | FP69 | 3 | - | 2 | 500 | 25 to 126K | 1, 2, 5, 10 | 150 |

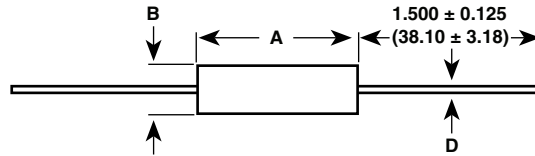
Note

(1) Continuous working voltage shall be $\sqrt{P \times R}$ or maximum working voltage, whichever is less.

| GLOBAL PART NUMBER INFORMATION | | | | |
|--|--|---|--------------------------------------|---|
| New Global Part Numbering: FP000251K1F9251B8 (preferred part numbering format) | | | | |
| F | P | 0 | 0 | 0 |
| 2 | 5 | 1 | K | 1 |
| F | 9 | 2 | 5 | 1 |
| B | 8 | | | |
| GLOBAL MODEL (See Standard Electrical Specifications table) | RESISTANCE VALUE R = Ω K = $\text{k}\Omega$ M = $\text{M}\Omega$ 10R0 = 10 Ω 1K30 = 1.3 $\text{k}\Omega$ 1M00 = 1.0 $\text{M}\Omega$ | TOLERANCE CODE F = $\pm 1 \%$ G = $\pm 2 \%$ J = $\pm 5 \%$ K = $\pm 10 \%$ | SPEC CODES (See Spec Codes table) | PACKAGING (2) EK = Lead (Pb)-free, strip EL = Lead (Pb)-free, lacer EA = Lead (Pb)-free, T/R B8 = Tin/lead, strip LB = Tin/lead, lacer CH = Tin/lead, T/R (750 pieces) CJ = Tin/lead, T/R (1000 pieces) G1 = Tin/lead, T/R (600 pieces) |
| Historical Part Number: FP2 5112 F B8 (will continue to be accepted) | | | | |
| FP2 | 5112 | F | B8 | |
| HISTORICAL MODEL | RESISTANCE VALUE | TOLERANCE CODE | PACKAGING | |

Note

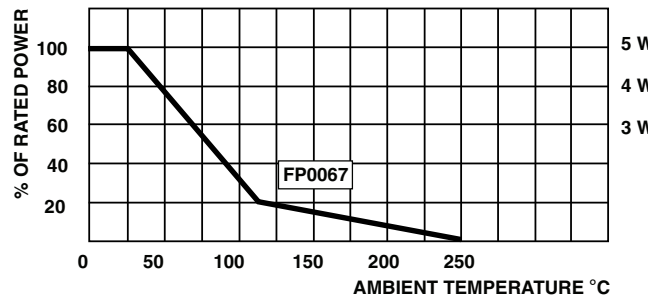
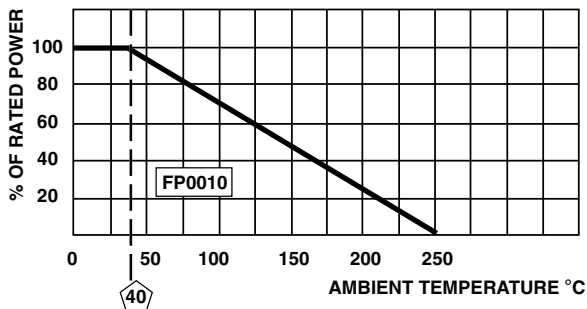
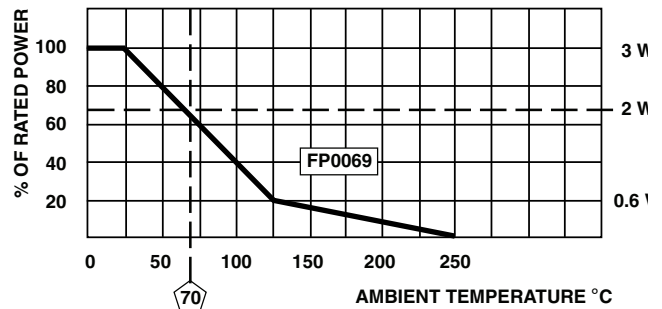
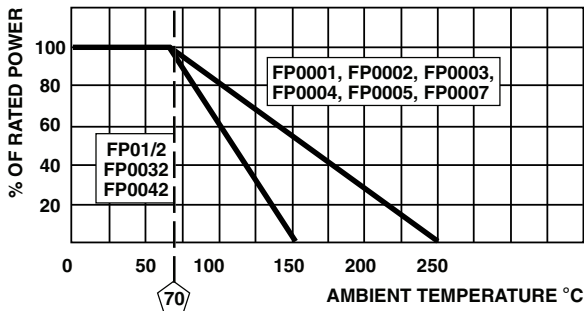
(2) Some packaging codes are model specific.

DIMENSIONS in inches (millimeters)


| GLOBAL MODEL | A | B | D |
|--------------|--|--|-----------------------------|
| FP01/2 | 0.360 ± 0.020 (9.14 ± 0.51) ⁽¹⁾ | 0.138 + 0.012 - 0.023 (3.51 + 0.31 - 0.58) | 0.032 ± 0.002 (0.81 ± 0.05) |
| FP0001 | 0.560 ± 0.031 (14.22 ± 0.79) | 0.190 + 0.005 - 0.030 (4.83 + 0.13 - 0.76) | 0.032 ± 0.002 (0.81 ± 0.05) |
| FP0032 | 0.560 ± 0.031 (14.22 ± 0.79) | 0.190 + 0.005 - 0.030 (4.83 + 0.13 - 0.76) | 0.040 ± 0.002 (1.02 ± 0.05) |
| FP0002 | 0.687 ± 0.031 (17.45 ± 0.79) | 0.300 ± 0.020 (7.62 ± 0.51) | 0.032 ± 0.002 (0.81 ± 0.05) |
| FP0042 | 0.687 ± 0.031 (17.45 ± 0.79) | 0.300 ± 0.020 (7.62 ± 0.51) | 0.045 ± 0.002 (1.14 ± 0.05) |
| FP0003 | 0.900 ± 0.031 (22.86 ± 0.79) | 0.300 ± 0.020 (7.62 ± 0.51) | 0.032 ± 0.002 (0.81 ± 0.05) |
| FP0004 | 1.530 ± 0.035 (38.86 ± 0.89) | 0.300 ± 0.020 (7.62 ± 0.51) | 0.032 ± 0.002 (0.81 ± 0.05) |
| FP0005 | 1.710 ± 0.035 (43.43 ± 0.89) | 0.300 ± 0.020 (7.62 ± 0.51) | 0.032 ± 0.002 (0.81 ± 0.05) |
| FP0007 | 2.040 ± 0.035 (51.82 ± 0.89) | 0.300 ± 0.020 (7.62 ± 0.51) | 0.032 ± 0.002 (0.81 ± 0.05) |
| FP0010 | 2.040 ± 0.035 (51.82 ± 0.89) | 0.300 ± 0.020 (7.62 ± 0.51) | 0.032 ± 0.002 (0.81 ± 0.05) |
| FP0067 | 0.900 ± 0.031 (22.86 ± 0.79) | 0.300 ± 0.020 (7.62 ± 0.51) | 0.032 ± 0.002 (0.81 ± 0.05) |
| FP0069 | 0.516 ± 0.021 (13.11 ± 0.53) | 0.225 ± 0.012 (5.72 ± 0.31) | 0.032 ± 0.002 (0.81 ± 0.05) |

Note

⁽¹⁾ Clean lead to clean lead dimensions on FP1/2 are 0.347" (11.10 mm) maximum.

DERATING


| SPEC CODES | | | |
|--------------|------|--------------------|---|
| GLOBAL MODEL | SPEC | RESISTOR TOLERANCE | DESCRIPTION |
| FP01/2 | 5605 | 1, 2, 5, 10 | Color banded, 4 or 5 bands depending on tolerance |
| | 5610 | 1, 2, 5, 10 | Alphanumeric marking |
| FP0001 | 6200 | 2, 5, 10 | Color banded, 4 bands |
| | 6201 | 1 | Color banded, 5 bands |
| FP0032 | 6601 | 1 | Color banded, 5 bands |
| | 6602 | 2, 5, 10 | Color banded, 4 bands |
| FP0002 | 9251 | 1, 2, 5, 10 | Alphanumeric marking |
| FP0042 | 9201 | 1 | Color banded, 5 bands |
| | 9202 | 2, 5, 10 | Color banded, 4 bands |
| FP0003 | 9300 | 1, 2, 5, 10 | Alphanumeric marking |
| | 9320 | 2, 5, 10 | Color banded, 4 bands |
| | 9330 | 1 | Color banded, 5 bands |
| FP0004 | 9400 | 1, 2, 5, 10 | Alphanumeric marking |
| FP0005 | 9500 | 1, 2, 5, 10 | Alphanumeric marking |
| FP0007 | 9700 | 1, 2, 5, 10 | Alphanumeric marking |
| FP0010 | 9800 | 1, 2, 5, 10 | Alphanumeric marking |
| FP0067 | 9550 | 1, 2, 5, 10 | Alphanumeric marking |
| FP0069 | 7500 | 1, 2, 5, 10 | Alphanumeric marking |
| | 7536 | 2, 5, 10 | Color banded, 4 bands |
| | 7538 | 1 | Color banded, 5 bands |

| MARKING | | | |
|--|---------|--|---|
| - DALE | - Value | - Tolerance | - Model and case size (Date and source code included on some styles) |
| ± 1 % tolerance parts are marked with 5 color bands. 5 bands, EIA Standard RS196. | | ± 2 %, ± 5 % and ± 10 % tolerance parts are marked with 4 color bands. 4 band commercial, EIA Standard. | |
| | | | |



| PERFORMANCE | | | | | | | | | | | | |
|-------------------------------------|--|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| TEST | MAXIMUM ΔR (TYPICAL TEST LOTS) \pm % | | | | | | | | | | | |
| | FP01/2 | FP0001 | FP0032 | FP0002 | FP0042 | FP0003 | FP0004 | FP0005 | FP0007 | FP0010 | FP0067 | FP0069 |
| Short Time Overload | 0.5 | 1.0 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| Low Temperature Operation | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.25 | 0.25 |
| Moisture Resistance | 1.0 | 1.5 | 1.5 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 |
| Shock | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| Vibration | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| Temperature Cycle | 1.0 | 1.0 | 1.0 | 0.5 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 1.0 | 0.5 |
| Load Life (1000 h Rated Conditions) | 1.0 | 2.0 | 2.0 | 5.0 | 2.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 5.0 | 3.0 |
| Terminal Strength | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 |
| Dielectric Withstanding Voltage | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.25 | 0.25 |
| Effect Solder Heat | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.5 | 0.25 | 0.25 |

| PACKAGING | | | |
|--------------------------------|----------------|-------------------|----------------|
| GLOBAL MODEL | PACKAGING TYPE | PACKAGING CODE | |
| | | LEAD (Pb)-BEARING | LEAD (Pb)-FREE |
| FP01/2, FP0001, FP0032, FP0069 | Strip | B8 | EK |
| | Tape/reel | CJ | EA |
| FP0002, FP0003, FP0042, FP0067 | Strip | B8 | EK |
| | Tape/reel | CH | EA |
| FP0004 | Lacer | LB | EL |
| | Tape/reel | G1 | EA |
| FP0005, FP0007, FP0010 | Lacer | LB | EL |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.