

Plasma Panel Display Modules
80 Character Display with Drive Electronics
Controller and Serial Interface



The APD-080M025-1 plasma display module consists of a multiplexed DC plasma display, drive circuitry and switching voltage converter mated with an intelligent, microprocessor-based controller board. The resulting assembly interfaces easily to microprocessor based systems and only requires readily available low voltages for power. Vishay Dale's patented open construction display technology assures a stable flicker free screen even at highest communication rates.

Interfacing is very simple (and requires no handshaking as a 20 byte FIFO buffer captures data when the display is busy) through a single 3 pin connector that has + 5 VDC, SERIAL (RS-232) DATA and GROUND connections.

An EPROM based character generator is factory programmed with 96 ASCII characters. Alternate character sets can be user or factory programmed.

Serial data protocol is 1 start bit, 8 data bits and no stop bit. Baud rate (300, 1200 or 9600) is selected with a control board jumper. A simplified command set allows quick and efficient code generation.

OPTICAL SPECIFICATIONS

Viewing Area: 4.03" [102.36mm] W x 1.46" [37.08mm] H.

Number of Characters: 80.

Character Size: 0.150" [3.81mm] W x 0.250" [6.35mm] H.

Luminance: 80 foot lamberts.


Viewing Angle: 150° cone.

FEATURES

- 80 (4 x 20) alphanumeric characters (5 x 7 dot matrix) plus underbar
- Only + 5 VDC required
- ASCII character set (optional character sets available)
- Efficient serial interface (RS-232)
- Wide viewing angle (150°)
- High brightness
- Rugged design/slim profile
- Flicker free refresh, high speed data input

STANDARD ELECTRICAL SPECIFICATIONS				
	MIN.	TYP.	MAX.	UNITS
Panel Supply Voltage	+ 4.75	+ 5.0	+ 5.25	V
Panel Supply Current	—	0.3	1.0	A

ASCII CHARACTER SET						
	32	48	64	80	96	112
0	SP	0	@	P	'	p
1	!	1	A	Q	a	q
2	"	2	B	R	b	r
3	#	3	C	S	c	s
4	\$	4	D	T	d	t
5	%	5	E	U	e	u
6	&	6	F	V	f	v
7	'	7	G	W	g	w
8	(8	H	X	h	x
9)	9	I	Y	i	y
10	*	:	J	Z	j	z
11	+	;	K	[k	{
12	,	<	L	\	l	
13	-	=	M]	m	}
14	.	>	N	^	n	~
15	/	?	O	_	o	

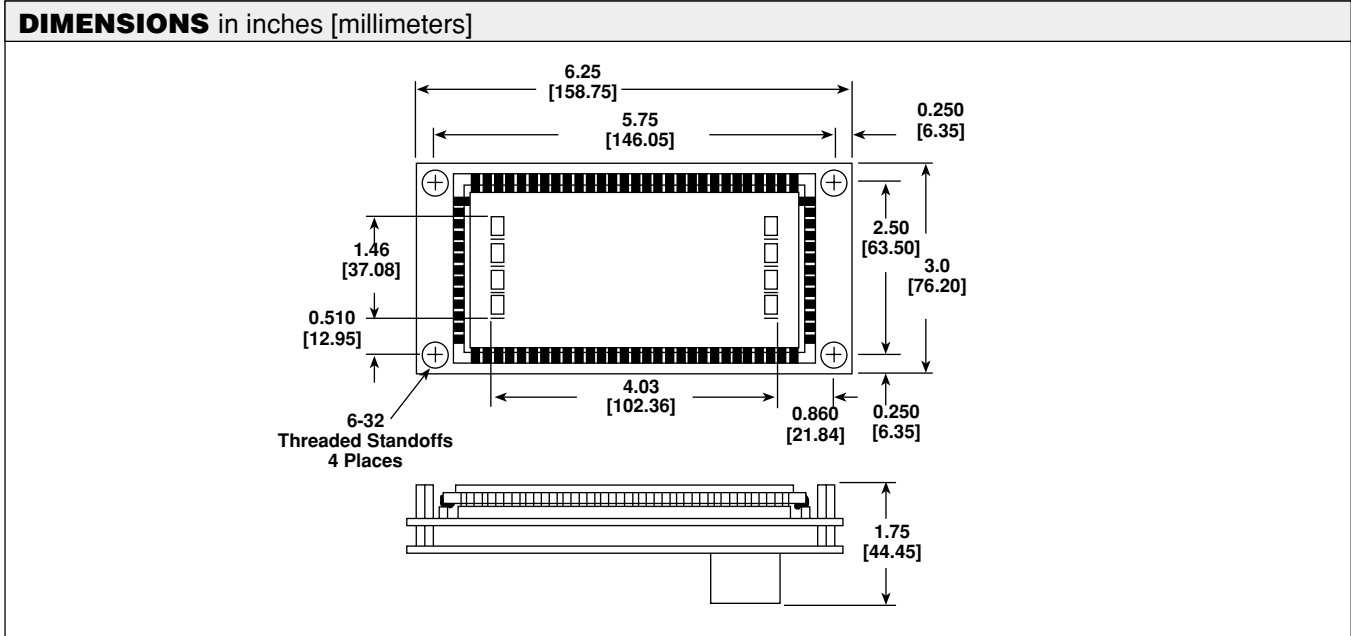

ORDERING INFORMATION	
DESCRIPTION	PART NUMBER
Display, Drive Electronics and Controller	APD-080M025-1
Mating Connector Kit	280108-01
Non-Glare Filter (amber circular polarized) - other filters available - contact factory	280109-10



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.