

Plasma Panel Display Module

256 x 64 Graphics Display with
Drive Electronics and TTL Level Data Interfacer



FEATURES

- TTL level video interface.
- Large, bright characters and graphics.
- > 30:1 contrast ratio.
- Slim profile.
- Highly visible for long distance viewing.

The APD-256G064 DC Plasma display offers viewing qualities designers seek such as high contrast, viewing angle of 150° minimum, and long distance readability. It is bright (50 foot lamberts minimum) with characters and graphics figures presented in a pleasing neon orange color against a black background. Plasma is much more readable and eye-pleasing than liquid crystal or vacuum fluorescent displays and is filterable to red, amber, or neutral density.

These plasma display panels are driven in a standard row - column refresh method much like a CRT display. The designer need only supply TTL level signals for SERIAL DATA, DOT CLOCK, COLUMN LATCH, ROW DATA, ROW CLOCK and DISPLAY ENABLE. The SERIAL DATA is entered with the DOT CLOCK up to frequencies as high as 8MHz. After a row of 256 pixels is clocked in, the COLUMN LATCH signal is toggled and the data is latched. At the time the data is latched, the display is briefly disabled using the DISPLAY ENABLE signal, then the row pointer is advanced with the ROW CLOCK signal. Once each frame the ROW DATA must be asserted to synchronize the column serial data with the beginning row. The recommended scanning frequency is approximately 70 Hz but may be as high as 200 Hz. The high clock rate on the data clock allows for rapid refresh and maximum access time to the refresh ram.

ELECTRICAL SPECIFICATIONS

Voltages Required: Vsp: + 75 VDC. Vcc: + 5 VDC.
Vsn: - 110 VDC. Vrw: + 12 VDC (- 98 VDC).
(+ 12 VDC referenced to - 110 VDC.)

Power Required: Typical = 12 watts. Maximum = 45 watts.

OPTICAL SPECIFICATIONS


Viewing Area: 12.75" [323.85mm] W x 4.24" [107.70mm] H.
Pixel Pitch: 0.05" [1.27mm] H, 0.066" [1.68mm] V.
Pixel Size: 0.025" x 0.040" [0.635mm x 1.016mm].
Character Array: 8 x 8: 32 x 16. 6 x 8: 42 x 16.
Character Size: 0.22" [5.59mm] W x 0.52" [13.21mm] H.
Luminance: 50 foot lamberts minimum.

STANDARD ELECTRICAL SPECIFICATIONS*

DESCRIPTION	SYMBOL	MIN.	TYP.	MAX.	UNITS
Logic supply	Vcc	+ 4.5	+ 5.0	+ 5.5	VDC
Anode supply	Vsp	—	+ 75.0	+ 80	VDC
Cathode supply	Vsn	—	- 110.0	- 125.0	VDC
Cathode control**	Vrw	+ 10.8	+ 12.0	+ 15.0	VDC
Total Vsp and Vsn	Vtot	170.0	185.0	205.0	VDC
Logic 1 Input	Vih	2.0	—	—	VDC
Logic 0 Input	Vil	—	—	0.8	VDC

*Recommended operating voltages. All maximums are absolute maximum.

** Vrw is referenced to Vsn.

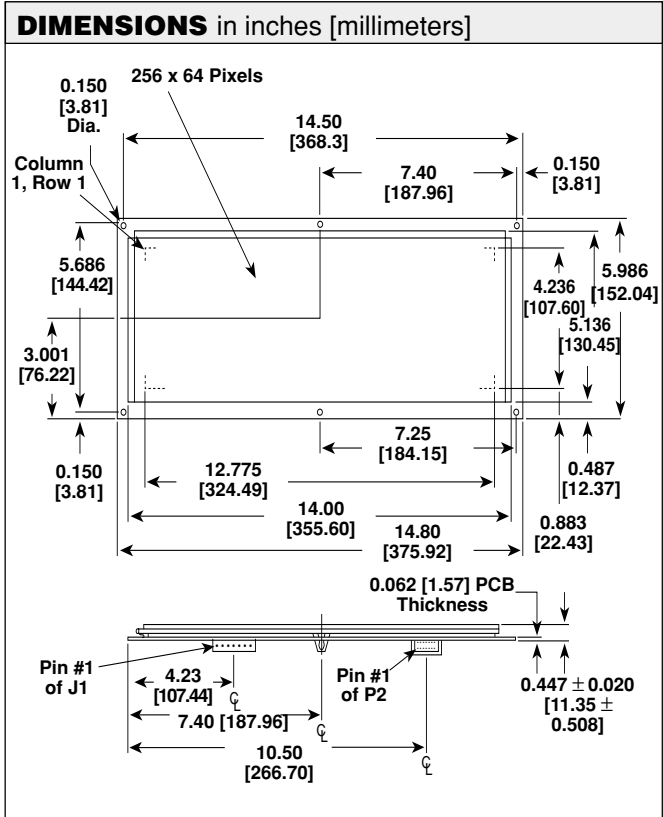

ORDERING INFORMATION

DESCRIPTION

DESCRIPTION	PART NUMBER
Display Module with Drivers and TTL Interface	APD-256G064
Data Connector	280105-05
Power Connector	280108-12



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.