
## LCD-160H128C



Vishay

## 160 x 128 Graphic LCD

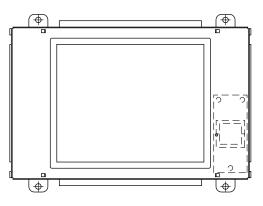

MECHANICAL DATA				
ITEM	STANDARD VALUE	UNIT		
Module dimension	150.0 x 112.0			
Viewing area	101.0 x 82.0			
Dot size	0.56 x 0.56			
Dot pitch	0.60 x 0.60	mm		
Mounting hole	118.0 x 105.0			
Character size	n/a			

## FEATURES

- Type: graphic
- Display format: 160 x 128 dots
- Built-in controller: RA6963 (or equivalent)
- Duty cycle: 1/128
- Optional N.V.
- +5 V power supply
- Optional CCFL inverter
- Material categorization: for definitions of compliance please see <u>www.vishay.com/doc?99912</u>

ABSOLUTE MAXIMUM RATINGS						
ITEM	SYMBOL	STAN				
	STIVIDUL	MIN.	TYP.	MAX.	UNIT	
Power supply	$V_{\text{DD}}$ to $V_{\text{SS}}$	4.75	5.0	5.25	V	
Input voltage	VI	-0.3	-	$V_{DD}$	v	

Note

•  $V_{SS} = 0 V, V_{DD} = 5.0 V$ 

ELECTRICAL CHARACTERISTICS						
ITEM	SYMBOL CC	CONDITION	ST	STANDARD VALUE		
		CONDITION	MIN.	TYP.	MAX.	UNIT
Input voltage	V <sub>DD</sub>	L level	0.7 V <sub>DD</sub>	-	V <sub>DD</sub>	V
	V <sub>IO</sub>	H level	0	-	0.3 V <sub>DD</sub>	V
Supply current	I <sub>DD</sub>	$V_{DD} = +5 V$	-	4.5	50	mA
Recommended LC driving voltage for normal temperature version module		-20 °C	19.9	21.0	22.1	V
		0 °C	19.0	-	21.2	
	V <sub>DD</sub> to V <sub>0</sub>	25 °C	18.6	19.1	19.6	
		50 °C	16.2	16.5	16.8	
		70 °C	11.6	9.1	12.8	
CCFL forward voltage	VF	25 °C	-	256	560	V
CCFL forward current	I <sub>F</sub>	25 °C	-	-	5.0	mA

OPTIONS									
PROCESS COLOR					BACKLIGHT				
TN	STN GRAY	STN YELLOW	STN BLUE	FSTN B&W	STN COLOR	NONE	LED	EL	CCFL
-	х	х	х	х	-	-	х	х	х

For detailed information, please see the "Product Numbering System" document.

Revision: 22-Jun-17




ROHS COMPLIANT



Vishay

INTERFACE PIN FUNCTION					
PIN NO.	SYMBOL	FUNCTION			
1	FGND	Frame ground			
2	V <sub>SS</sub>	Power supply (ground)			
3	V <sub>DD</sub>	Power supply (+5 V)			
4	V <sub>ADJ</sub>	Contrast adjustment			
5	V <sub>EE</sub>	Negative voltage output			
6	WR	Data write			
7	RD	Data read			
8	CĒ	Chip enable			
9	C/D	Command / data read / write			
10	HALT	Clock operating stop signal			
11	Reset	Reset signal			
12	DB0	Data bus line			
13	DB1	Data bus line			
14	DB2	Data bus line			
15	DB3	Data bus line			
16	DB4	Data bus line			
17	DB5	Data bus line			
18	DB6	Data bus line			
19	DB7	Data bus line			
20	NC	No connection			

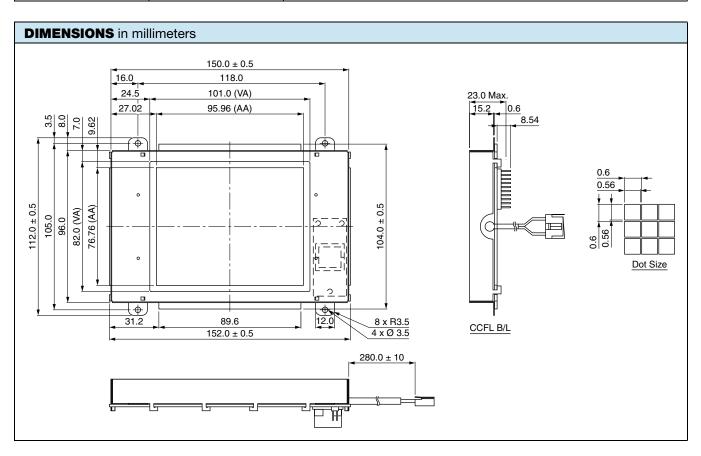

2



Vishay

## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2025 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

Revision: 01-Jan-2025

1