


Solid Tantalum Chip Capacitors

TANTAMOUNT® Military, Surface Mount

MIL-PRF-55365/4 Qualified

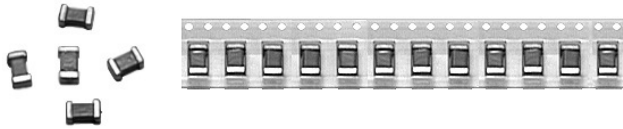

FEATURES

- Weibull Failure Rates B, C, D Exponential M, P, R, S
- Tape and Reel available per EIA 481-1 and -2
- Termination finishes available; Gold Plate, 50 μ inch minimum (standard), Solder Plated Hot Solder Dipped



RoHS*
COMPLIANT

PERFORMANCE CHARACTERISTICS

Operating Temperature: - 55 °C to + 85 °C

(To + 125 °C with voltage derating)

Note: Refer to Doc. 40088


Capacitance Range: 0.10 μF - 100 μF

Capacitance Tolerance: ± 10 %, ± 20 % standard ± 5 % available as special

Voltage Rating: 4 WVDC to 50 WVDC

ORDERING INFORMATION						
CWR06	D	B	155	K	B	OPTIONAL
TYPE	VOLTAGE	TERMINATION FINISH	CAPACITANCE	CAPACITANCE TOLERANCE	FAILURE RATE %/1000,HOURS	SURGE CURRENT OPTIONS
C = 4 V D = 6 V F = 10V H = 15 V J = 20 V K = 25 V M = 35 V N = 50 V	B = Gold - Standard (RoHS compliant) H = Solder Plate C = Solder Dipped	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow.	K = ± 10 % M = ± 20 % J = ± 5 %	A = Commercial M = 1.0 P = 0.1 R = 0.01 S = 0.001 B = 0.1 C = 0.01 D = 0.001**	A = 10 Cycles at + 25 °C B = 10 Cycles at - 55 °C and + 85 °C C = 10 Cycles at - 55 °C and + 85 °C (Before Weibull Grading)	

DIMENSIONS in inches [millimeters]

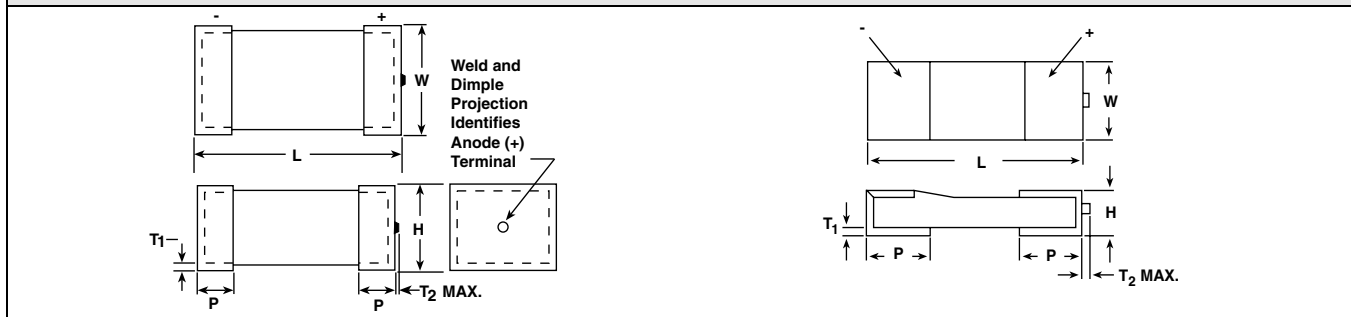

CASE CODE	L	W	H	P	T ₁	T ₂ (MAX.)
A	0.100 ± 0.015 [2.54 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.030 ± 0.005 [0.76 ± 0.13]	0.005 [0.13]	0.015 [0.38]
B	0.150 ± 0.015 [3.81 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.030 ± 0.005 [0.76 ± 0.13]	0.005 [0.13]	0.015 [0.38]
C	0.200 ± 0.015 [5.08 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.030 ± 0.005 [0.76 ± 0.13]	0.005 [0.13]	0.015 [0.38]
D	0.150 ± 0.015 [3.81 ± 0.38]	0.100 ± 0.015 [2.54 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.030 ± 0.005 [0.76 ± 0.13]	0.005 [0.13]	0.015 [0.38]
E	0.200 ± 0.015 [5.08 ± 0.38]	0.100 ± 0.015 [2.54 ± 0.38]	0.050 ± 0.015 [1.27 ± 0.38]	0.030 ± 0.005 [0.76 ± 0.13]	0.005 [0.13]	0.015 [0.38]
F	0.220 ± 0.015 [5.59 ± 0.38]	0.135 ± 0.015 [3.43 ± 0.38]	0.070 ± 0.015 [1.78 ± 0.38]	0.030 ± 0.005 [0.76 ± 0.13]	0.005 [0.13]	0.015 [0.38]
G	0.265 ± 0.015 [6.73 ± 0.38]	0.110 ± 0.015 [2.79 ± 0.38]	0.110 ± 0.015 [2.79 ± 0.38]	0.050 ± 0.005 [1.27 ± 0.13]	0.005 [0.13]	0.015 [0.38]
H	0.285 ± 0.015 [7.24 ± 0.38]	0.150 ± 0.015 [3.81 ± 0.38]	0.110 ± 0.015 [2.79 ± 0.38]	0.050 ± 0.005 [1.27 ± 0.13]	0.005 [0.13]	0.015 [0.38]

Notes

When solder coated terminations are required, add 0.015" [0.38mm] to termination dimension tolerances.

** Contact marketing for availability of Weibull D FR on 50 V ratings

* Pb containing terminations are not RoHS compliant, exemptions may apply



Solid Tantalum Chip Capacitors
TANTAMOUNT® Military, Surface Mount
MIL-PRF-55365/4 Qualified

Vishay Sprague

RATINGS AND CASE CODES								
µF	4 V	6 V *	10 V	15 V	20 V	25 V	35 V	50 V
0.10								A
0.15								A
0.22							A	B
0.33						A		B
0.47					A		B	C
0.68				A	B	B	C	D
1.0			A		B	C	D	E
1.5		A		B	C	D	E	F
2.2	A		B	C	D	E		F
3.3		B	C	D	E		F	G
4.7	B	C	D	E		F	G	H
6.8	C	D	E		F	G	H	
10	D	E		F		G		
15	E		F		G	H		
22		F		G	H			
33	F		G	H				
47		G	H					
68	G	H						
100	H							

STANDARD RATINGS									
CAPACITANCE (µF)	CASE CODE	PART NUMBER*	MAX. DCL (µA) AT			MAX. DF (%) AT			MAX. ESR AT + 25 °C 100 kHz (Ohms)
			+ 25 °C	+ 85 °C	+ 125 °C	+ 25 °C	+ 85 °C + 125 °C	- 55 °C	
4 WVDC AT + 85 °C, SURGE = 5 V . . . 2.7 WVDC AT + 125 °C, SURGE = 3.4 V									
2.2	A	CWR06C at 225#*	1.0	10	12	6	8	8	8.0
4.7	B	CWR06C at 475#*	1.0	10	12	6	8	8	8.0
6.8	C	CWR06C at 685#*	1.0	10	12	6	8	8	5.5
10	D	CWR06C at 106#*	1.0	10	12	8	8	10	4.0
15	E	CWR06C at 156#*	1.0	10	12	8	10	12	3.5
33	F	CWR06C at 336#*	2.0	20	24	8	10	12	2.2
68	G	CWR06C at 686#*	3.0	30	36	10	12	12	1.1
100	H	CWR06C at 107#*	4.0	40	48	10	12	12	0.9
6 WVDC AT + 85 °C, SURGE = 8 V . . . 4 WVDC AT + 125 °C, SURGE = 5 V									
1.5	A	CWR06D at 155#*	1.0	10	12	6	8	8	8.0
3.3	B	CWR06D at 335#*	1.0	10	12	6	8	8	8.0
4.7	C	CWR06D at 475#*	1.0	10	12	6	8	8	5.5
6.8	D	CWR06D at 685#*	1.0	10	12	6	8	8	4.5
10	E	CWR06D at 106#*	1.0	10	12	8	10	12	3.5
22	F	CWR06D at 226#*	2.0	20	24	8	10	12	2.2
47	G	CWR06D at 476#*	3.0	30	36	10	12	12	1.1
68	H	CWR06D at 686#*	4.0	40	48	10	12	12	0.9
10 WVDC AT + 85 °C, SURGE = 13 V . . . 7 WVDC AT + 125 °C, SURGE = 9 V									
1.0	A	CWR06F at 105#*	1.0	10	12	6	8	8	12.0
2.2	B	CWR06F at 225#*	1.0	10	12	6	8	8	8.0
3.3	C	CWR06F at 335#*	1.0	10	12	6	8	8	5.5
4.7	D	CWR06F at 475#*	1.0	10	12	6	8	8	4.5
6.8	E	CWR06F at 685#*	1.0	10	12	6	8	8	3.5
15	F	CWR06F at 156#*	2.0	20	24	8	8	10	2.5
33	G	CWR06F at 336#*	3.0	30	36	10	12	12	1.1
47	H	CWR06F at 476#*	5.0	50	60	10	12	12	0.9

at = Termination Finish: B = Gold (standard), H = solder Plated, C = Hot solder dipped

= Cap.Tolerance: J = 5 %, K = 10 %, M = 20 %.

* = Failure Rate B, C, D Weibull
M, P, R, S Exponential



STANDARD RATINGS									
CAPACITANCE (µF)	CASE CODE	PART NUMBER*	MAX. DCL (µA) AT			MAX. DF (%) AT			MAX. ESR AT + 25 °C 100 kHz (Ohms)
			+ 25 °C	+ 85 °C	+ 125 °C	+ 25 °C	+ 85 °C + 125 °C	- 55 °C	
15 WVDC AT + 85 °C, SURGE = 20 V . . . 10 WVDC AT + 125 °C, SURGE = 12 V									
0.68	A	CWR06H at 684#*	1.0	10	12	6	8	8	12.0
1.5	B	CWR06H at 155#*	1.0	10	12	6	8	8	8.0
2.2	C	CWR06H at 225#*	1.0	10	12	6	8	8	5.5
3.3	D	CWR06H at 335#*	1.0	10	12	6	8	8	5.0
4.7	E	CWR06H at 475#*	1.0	10	12	6	8	8	4.0
10	F	CWR06H at 106#*	2.0	20	24	6	8	8	2.5
22	G	CWR06H at 226#*	4.0	40	48	8	8	10	1.1
33	H	CWR06H at 336#*	5.0	50	60	8	8	10	0.9
20 WVDC AT + 85 °C, SURGE = 26 V . . . 13 WVDC AT + 125 °C, SURGE = 16 V									
0.47	A	CWR06J at 474#*	1.0	10	12	6	8	8	16.0
0.68	B	CWR06J at 684#*	1.0	10	12	6	8	8	14.0
1.0	B	CWR06J at 105#*	1.0	10	12	6	8	8	12.0
1.5	C	CWR06J at 155#*	1.0	10	12	6	8	8	6.0
2.2	D	CWR06J at 225#*	1.0	10	12	6	8	8	5.0
3.3	E	CWR06J at 335#*	1.0	10	12	6	8	8	4.0
6.8	F	CWR06J at 685#*	2.0	20	24	6	8	8	2.4
15	G	CWR06J at 156#*	3.0	30	36	6	8	8	1.1
22	H	CWR06J at 226#*	4.0	40	48	6	8	8	0.9
25 WVDC AT + 85 °C, SURGE = 32 V . . . 17 WVDC AT + 125 °C, SURGE = 20 V									
0.33	A	CWR06K at 334#*	1.0	10	12	6	8	8	15.0
0.68	B	CWR06K at 684#*	1.0	10	12	6	8	8	10.0
1.0	C	CWR06K at 105#*	1.0	10	12	6	8	8	6.5
1.5	D	CWR06K at 155#*	1.0	10	12	6	8	8	6.5
2.2	E	CWR06K at 225#*	1.0	10	12	6	8	8	3.5
4.7	F	CWR06K at 475#*	2.0	20	24	6	8	8	2.5
6.8	G	CWR06K at 685#*	2.0	20	24	6	8	8	1.2
10	G	CWR06K at 106#*	3.0	30	36	6	8	8	1.4
15	H	CWR06K at 156#*	4.0	40	48	6	8	8	1.0
35 WVDC AT + 85 °C, SURGE = 46 V . . . 23 WVDC AT + 125 °C, SURGE = 28 V									
0.22	A	CWR06M at 224#*	1.0	10	12	6	8	8	24.0
0.47	B	CWR06M at 474#*	1.0	10	12	6	8	8	17.0
0.68	C	CWR06M at 684#*	1.0	10	12	6	8	8	10.0
1.0	D	CWR06M at 105#*	1.0	10	12	6	8	8	6.5
1.5	E	CWR06M at 155#*	1.0	10	12	6	8	8	4.5
3.3	F	CWR06M at 335#*	1.0	10	12	6	8	8	2.5
4.7	G	CWR06M at 475#*	2.0	20	24	6	8	8	1.5
6.8	H	CWR06M at 685#*	3.0	30	36	6	8	8	1.3
50 WVDC AT + 85 °C, SURGE = 65 V . . . 33 WVDC AT + 125 °C, SURGE = 38 V									
0.10	A	CWR06N at 104#*	1.0	10	12	6	8	8	75.0
0.15	A	CWR06N at 154#*	1.0	10	12	6	8	8	25.0
0.22	B	CWR06N at 224#*	1.0	10	12	6	8	8	17.0
0.33	B	CWR06N at 334#*	1.0	10	12	6	8	8	12.0
0.47	C	CWR06N at 474#*	1.0	10	12	6	8	8	8.0
0.68	D	CWR06N at 684#*	1.0	10	12	6	8	8	7.0
1.0	E	CWR06N at 105#*	1.0	10	12	6	8	8	6.0
1.5	F	CWR06N at 155#*	1.0	10	12	6	8	8	4.0
2.2	F	CWR06N at 225#*	2.0	20	24	6	8	8	2.5
3.3	G	CWR06N at 335#*	2.0	20	24	6	8	8	2.0
4.7	H	CWR06N at 475#*	3.0	30	36	6	8	8	1.5

at = Termination Finish: B = Gold (standard), H = solder Plated, C = Hot solder dipped

= Cap.Tolerance: J = 5 %, K = 10 %, M = 20 %

* = Failure Rate B, C, D Weibull
M, P, R, S Exponential



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.