




# BULK METAL<sup>®</sup> FOIL TECHNOLOGY

VSM Series (0805, 1206, 1506, 2010, 2512)

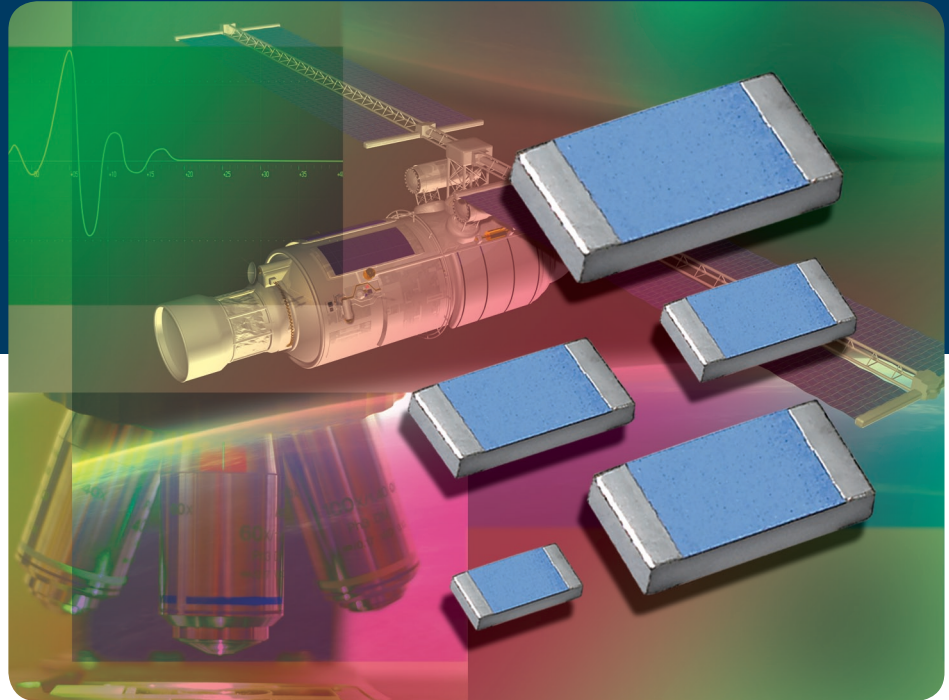

## Foil Wraparound Surface-Mount Chip Resistor with TCR of $\pm 2$ ppm/ $^{\circ}$ C and Load-Life Stability of $\pm 0.005$ % (50 ppm)

### KEY BENEFITS

- Temperature coefficient of resistance (TCR):  $\pm 2$  ppm/ $^{\circ}$ C (MIL range,  $-55$   $^{\circ}$ C to  $+125$   $^{\circ}$ C)
- Tolerance to  $\pm 0.01$  %
- Load-life stability (70  $^{\circ}$ C for 2000 hours at rated power):  $\pm 0.005$  %
- Rated power: 100 to 400 mW at  $+70$   $^{\circ}$ C depending on size
- Non-inductive, non-capacitive design
- Electrostatic discharge (ESD) above 25,000 Volts
- Short-time overload  $\leq \pm 0.01$  %
- Rise time: 1 ns without ringing
- Any value at any tolerance

### APPLICATIONS

- Automatic Test Equipment (ATE)
- High precision instrumentation
- Laboratory, industrial and medical
- Audio
- Military and aerospace

Datasheet is available on our web site at [www.vishay.com](http://www.vishay.com) for VSM Series - <http://www.vishay.com/doc?63070>

### Foil Wraparound Surface-Mount Chip Resistor with TCR of $\pm 2$ ppm/ $^{\circ}$ C and Load-Life Stability of $\pm 0.01$ % (100 ppm)



Top View

Any value at any tolerance within resistance range

#### INTRODUCTION

Bulk Metal<sup>®</sup> Foil (BMF) Technology out-performs all other resistor technologies available today for applications that require high precision and high stability.

This technology has been invented, patented and pioneered by Vishay. Products based on this technology are the most suitable for a wide range of applications.

BMF technology allows to produce customer oriented products designed to satisfy challenging and specific technical requirements.


The BMF provides inherently a low and predictable Temperature Coefficient of Resistance (TCR) and excellent load life stability for high precision analog applications.

Model VSM offers low TCR, excellent load life stability, tight tolerance, excellent shelf life stability, low thermal EMF, low current noise and low voltage coefficient, all in the same resistor.

The VSM has a full wrap around termination which insures safe handling during the manufacturing process, as well as providing stability during multiple thermal cyclings.

Our Application Engineering Department is available to advise and make recommendations for non-standard technical requirements and special applications, please contact us using the e-mail addresses in the footer below.

#### FIGURE 1 - TRIMMING TO VALUES (CONCEPTUAL ILLUSTRATION)

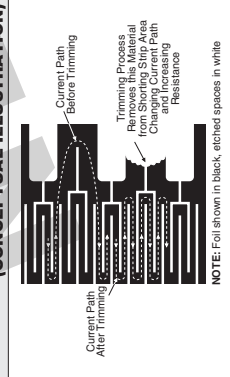

\* Pb containing terminations are not RoHS compliant, exemptions may apply

#### SALES

- ISRAEL: foisales.israel@vishay.com
- FRANCE/SWITZERLAND/SOUTHERN EUROPE: foisales.eusouth@vishay.com
- AMERICAS: foisales.usa.vishay.com

- ASIA/JAPAN: foisales.asiate@vishay.com
- UK/HOLLAND/SCANDINAVIA: foisales.eucentral@vishay.com
- GERMANY/CZECH REPUBLIC/AUSTRIA: foisales.eucentral@vishay.com

#### FEATURES

- TCR:  $\pm 2.0$  ppm/ $^{\circ}$ C (see Table 1)
- Load Life Stability (70 $^{\circ}$ C for 2000 hours):  $\pm 0.01$ %
- Power Rating to: 400 mW at +70 $^{\circ}$ C
- Resistance Range: 10 $\Omega$  to 150K $\Omega$  (for higher and lower values, please contact us)
- Short time overload:  $\leq \pm 0.01$ %
- Tolerance: to  $\pm 0.01$ %
- Non Inductive/Capacitive design
- Rise time: Trs without ringing
- Current Noise:  $\sim 40$ dB
- Electrostatic Discharge (ESD) above 25 000 Volts
- Voltage Coefficient  $< 0.1$  ppm/V
- Non Inductive:  $< 0.08$   $\mu$ H
- Thermal EMF:  $< 0.05$   $\mu$ V/ $^{\circ}$ C
- Non hot spot design
- Terminal Finishes Available:
  - Lead (Pb)-Free
  - Tin/Lead Alloy
- Matched sets are available per request
- For better performances please review VSMIP and VFCP Series datasheets

#### TABLE 1 - TOLERANCE AND TCR VS RESISTANCE VALUE\*\*

RESISTANCE VALUE ( $\Omega$ )	TOLERANCE (%)	TYPICAL TCR AND MAX. SPREAD (ppm/ $^{\circ}$ C)
250 to 150K	$\pm 0.01$	$\pm 2 \pm 2$
100 to $< 250$	$\pm 0.02$	$\pm 2 \pm 3$
50 to $< 100$	$\pm 0.05$	$\pm 2 \pm 3$
25 to $< 50$	$\pm 0.1$	$\pm 2 \pm 4$
10 to $< 25$	$\pm 0.25$	$\pm 2 \pm 6$

\*\*For Tigher performances, please contact Vishay Application Engineering using the e-mail addresses in the footer below.

#### APPLICATIONS

- Automatic Test Equipment (ATE)
- High Precision Instrumentation
- Laboratory, Industrial and Medical
- Audio
- EB Applications (electron beam scanning and recording equipment, electron microscopes)
- Military and Space
- Airborne
- Down Hole instrumentation
- Communication

TABLE 2 - SPECIFICATIONS

CHIP SIZE	RATED POWER (mW) at +70 $^{\circ}$ C	MAX VOLTAGE RATING ( $\leq$ -VPR)	RESISTANCE RANGE ( $\Omega$ )	MAXIMUM WEIGHT (mg)
0805	100	34V	10 to 12K	6
1206	150	67V	10 to 30K	11
1506	200	89V	10 to 40K	12
2010	300	173V	10 to 100K	27
2512	400	220V	10 to 150K	40

TABLE 3 - PERFORMANCES

TEST OR CONDITIONS	MIL-PRF-55342 H CHARACTERISTIC E $\Delta$ R LIMITS	TYPICAL $\Delta$ R LIMITS	MAXIMUM $\Delta$ R LIMITS**
Thermal Shock	$\pm 0.1$ %	$\pm 0.005$ % (50 ppm)	$\pm 0.02$ % (200 ppm)
Low Temperature Operation	$\pm 0.1$ %	$\pm 0.01$ % (100 ppm)	$\pm 0.02$ % (200 ppm)
Short Time Overload	$\pm 0.1$ %	$\pm 0.01$ % (100 ppm)	$\pm 0.02$ % (200 ppm)
High Temperature Exposure	$\pm 0.1$ %	$\pm 0.01$ % (100 ppm)	$\pm 0.03$ % (300 ppm)
Resistance to Soldering Heat	$\pm 0.2$ %	$\pm 0.005$ % (50 ppm)	$\pm 0.01$ % (100 ppm)
Moisture Resistance	$\pm 0.2$ %	$\pm 0.005$ % (50 ppm)	$\pm 0.03$ % (300 ppm)
Load Life Stability +70 $^{\circ}$ C for 2000 hours at Rated Power	$\pm 0.5$ %	$\pm 0.005$ % (50 ppm)	$\pm 0.01$ % (100 ppm)

\*\*As shown + 0.01 $\Omega$  to allow for measurement errors at low values.

TABLE 4 - DIMENSIONS AND LAND PATTERN in inches (millimeters)

CHIP SIZE	L	W	THICKNESS	D		Z***	G***	X***
				MAXIMUM	MINIMUM			
0805	$\pm 0.005$ (0.13)	$\pm 0.005$ (0.13)	0.025 (0.64)	0.122 (3.10)	0.028 (0.70)	0.122 (3.10)	0.028 (0.70)	0.050 (1.27)
1206	0.090 (2.03)	0.050 (1.27)	0.025 (0.64)	0.175 (4.4)	0.059 (1.5)	0.175 (4.4)	0.059 (1.5)	0.071 (1.80)
1506	0.150 (3.81)	0.062 (1.57)	0.025 (0.64)	0.200 (5.08)	0.199 (5.05)	0.200 (5.08)	0.199 (5.05)	0.071 (1.80)
2010	0.198 (5.03)	0.097 (2.46)	0.025 (0.64)	0.247 (6.27)	0.115 (2.92)	0.247 (6.27)	0.115 (2.92)	0.103 (2.63)
2512	0.249 (6.32)	0.127 (3.22)	0.025 (0.64)	0.291 (7.40)	0.150 (3.8)	0.291 (7.40)	0.150 (3.8)	0.127 (3.22)

\*\*\*Land Pattern Dimensions are per IPC-782

Bottom View for Mounting



NOTICE: Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc. or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies. Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability or infringement of any patent, copyright, or other intellectual property right. The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.