

## Fully Sealed Container Cermet Potentiometers Military and Professional Grade


**P13V**

**P13T**

P13 potentiometers fully conform to CECC 41301-001 specification. Their excellent performances are due to the use of a cermet-track sealed in a large case.

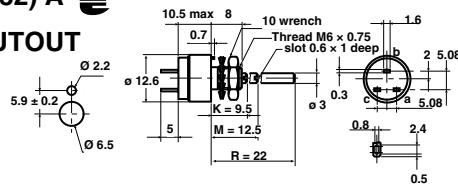

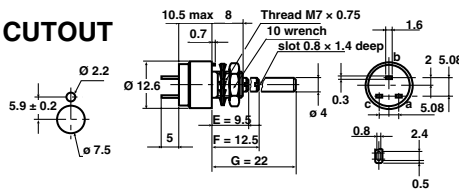
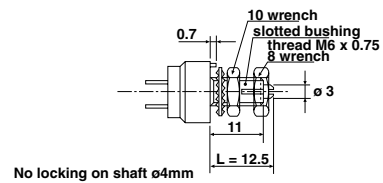
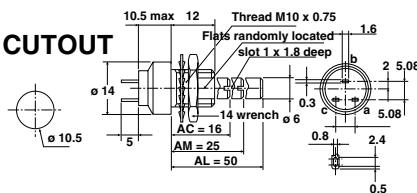

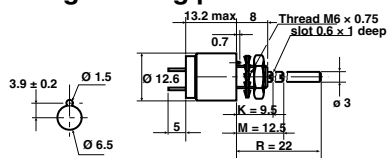
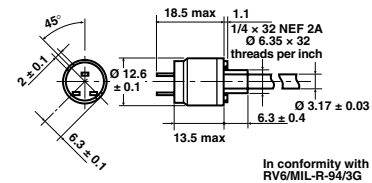
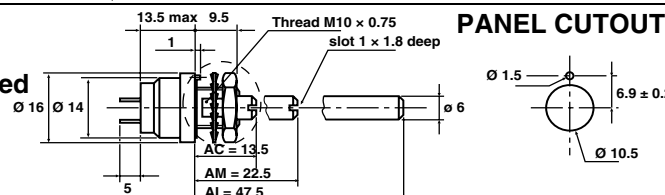
P13 interchangeability with RV6, combined with the excellent stability of its rated characteristics make it fully acceptable for military and professional uses.

### FEATURES

- High power rating 1.5 Watt at 70 °C
- CECC 41 301-001 (A, B, C)
- GAM T1
- Fully sealed case
- Tight temperature coefficient ( $\pm 75$  ppm/°C typical)
- Mechanical strength



### DIMENSIONS in millimeters

**P13T - (PC32) A**
**PANEL CUTOUT**

**CIRCUIT DIAGRAM**

**P13Q - B**
**PANEL CUTOUT**

**P13H**

**P13V - (PC33) C**
**PANEL CUTOUT**

**P13V DBAN**

**Panel sealed version**
**P13TP - P13TPE**
**TPE: Including locating ped**

**P13T - F55**

**Panel sealed version**
**P13VP - P13VPE**
**VPE: Including locating ped**


Undergoes European Quality Insurance System



ELECTRICAL SPECIFICATIONS		
Resistive Element		cermet
Electrical Travel		270° ± 10°
Resistance Range	Linear Law	22 Ω to 10 MΩ
	Logarithmic Laws	100 Ω to 2.2 MΩ
Standard series E3		1 - 2.2 - 4.7 and on request 1 - 2 - 5
Tolerance	Standard	± 20 %
	On Request	± 10 % - ± 5 %
Power Rating	Linear	1.5 W at + 70 °C
	Logarithmic	0.75 W at + 70 °C
Temperature Coefficient		See Standard Resistance Element Data
Limiting Element Voltage (Linear Law)		350 V
Contact Resistance Variation		3 % Rn or 3 Ω
End Resistance (Typical)		1 Ω
Dielectric Strength (RMS)		2000 V
Insulation Resistance (500 VDC)		10 <sup>6</sup> MΩ

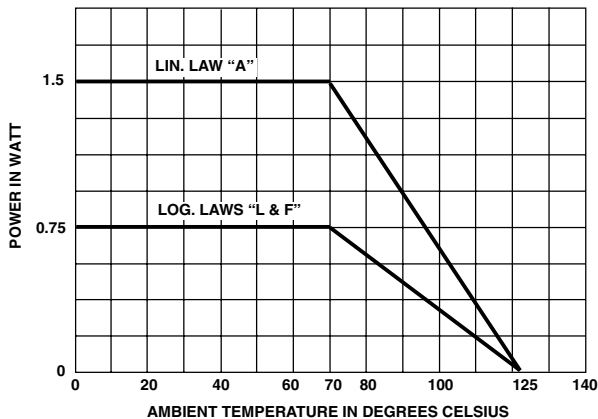
**MECHANICAL SPECIFICATIONS**

Mechanical Travel 300° ± 5°  
 Operating Torque (max. Ncm) 2 typical  
 End Stop Torque (max. Ncm) style T.Q.: 35 - V: 80  
 Tightening Torque (max. Ncm) T.Q.: 150 - V: 250  
 Unit Weight (max. g) 6 to 18


**ENVIRONMENTAL SPECIFICATIONS**

Temperature Range - 55 °C to + 125 °C  
 Climatic Category 55/100/56  
 Sealing fully sealed  
 container IP67

**POWER RATING CHART**



**RESISTANCE LAWS**

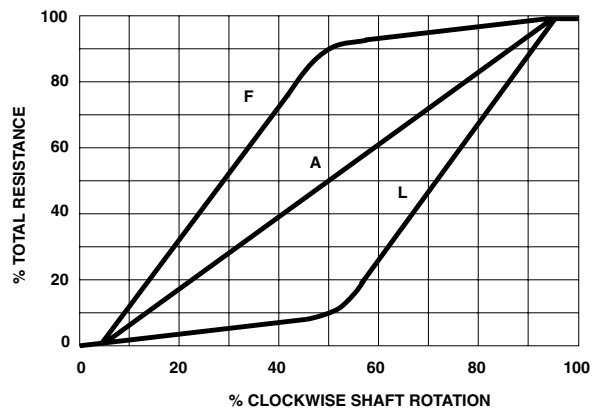

**TEMPERATURE COEFFICIENT**

For values ≥ 100 ohms and in the temperature range + 20 °C to + 70 °C, the typical temperature coefficient is ± 75 ppm/°C.



Fully Sealed Container Cermet Potentiometers  
Military and Professional Grade

Vishay Sfernice

PERFORMANCE						
NF C 83-253					TYPICAL VALUES AND DRIFTS	
TESTS	CONDITIONS	$\frac{\Delta RT}{RT}$ (%)	REQUIREMENTS	$\frac{\Delta R_{1-2}}{R_{1-2}}$ (%)	$\frac{\Delta RT}{RT}$ (%)	$\frac{\Delta R_{1-2}}{R_{1-2}}$ (%)
Climatic Sequence	Phase A dry heat 125 °C Phase B damp heat Phase C cold - 55 °C Phase D damp heat 5 cycles	± 10 %		± 10 %	± 0.5 %	± 1 %
Long Term Damp Heat	56 days 40 °C 93 % RH	± 10 %		± 10 %	± 0.5 %	± 1 %
Rotational Life	25 000 cycles	± 10 %	Contact res. variation: < 7 % Rn		± 3 %	Contact res. variation: < 2 % Rn
Load Life	1000 h at rated power 90°/30° - ambient temp. 70 °C	± 10 %	Contact res. variation: < 7 % Rn		± 1 %	Contact res. variation: < 3 % Rn
Rapid Temperature Change	5 cycles - 55 °C at + 125 °C	± 3 %			± 0.5 %	
Shocks	50 g at 11 ms 3 successive shocks in 3 directions	± 2 %			± 0.1 %	± 0.2 %
Vibrations	10 - 55 Hz 0.75 mm or 10 g during 6 hours	± 2 %			± 0.1 %	$\frac{\Delta V_{1-2}}{V_{1-3}} < \pm 0.2 \%$

STANDARD RESISTANCE ELEMENT DATA							
STANDARD RESISTANCE VALUES	LINEAR LAW			LOGS LAW			TCR -55 °C +125 °C
	MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. WIPER CUR.	MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. WIPER CUR.	
Ω	W	V	mA	W	V	mA	ppm/°C
22	1.5	5.74	261				0
47		8.4	177				+200
100		12.2	122				
220		18.2	82.6				
470		26.5	56.5				
1K		38.7	38.7	0.75	27	27	
2.2K		57.5	26.1		40	18	
4.7K		84	17.9		59	12	
10K		122.5	12.2		87	8.7	
22K		182	8.26		128	5.8	
47K	1.5	265	5.65		187	3.9	± 100
100K	1.22	350	3.5	0.75	273	2.7	
220K	0.56	350	1.6	0.56	350	1.6	
470K	0.26	350	0.74	0.26	350	0.74	
1M	0.12	350	0.35	0.12	350	0.35	
2.2M	0.05	350	0.16	0.05	350	0.16	
4.7M	0.026	350	0.074				
10M	0.012	350	0.035				

**MARKING**

- Printed:
- VISHAY trademark
  - series
  - style
  - ohmic value (in Ω, kΩ or MΩ)
  - tolerance (in %)
  - resistance law
  - manufacturing date
  - marking of terminals a

**SPECIAL FEATURES  
PANEL SEALING**

Potentiometers P13T and P13V can be fitted with a device providing sealing between the threaded bushing and the front panel. Their designation is P13TP and P13VP respectively or with a locating peg P13TPE and P13VPE.

**SHAFT**

Shaft lengths are measured from the mounting surface to the free end of the potentiometer. Special shafts are available, provided customer supplies a drawing.

The shaft slot is aligned to the wiper within ± 10°.

**SHAFT LOCKING**

On potentiometers equipped with a 3 mm Ø shaft, shaft locking can be obtained:

- either by a taper nut tightening a slotted bushing. Ask for P13H type. These devices are normally equipped with an L type shaft (12.5 mm with a slot),
  - or by a tightening nut locked by a screw. Ask for ES1 type.
- On potentiometers equipped with a Ø 6 mm shaft, locking can be obtained by a taper nut applying pressure on a slotted notched washer. This device is supplied in a box as an accessory. Ask for DBAN.

These devices are ordered separately. Please consult VISHAY SFERNICE.

ORDERING INFORMATION								
P13	T	P OR PE	M	22 kΩ	± 20 %	A	XX	BO
SERIES	STYLE	PANEL SEALING	SHAFT	OHMIC VALUE	TOLERANCE	LAW	SPECIAL FEATURES	PACKAGING
	T 6 mm dia, 3 mm dia. shaft		K 9.5 mm, slotted M 12.5 mm, slotted R 22 mm, plain		± 20 % standard ± 10 % on request	A Linear L clockwise logarithmic F inverse clockwise logarithmic	F55 DBAN F32 (PCB style)	
	Q 7 mm dia, 4 mm dia. shaft		E 9.5 mm, slotted F 12.5 mm, slotted G 22 mm, plain					
	V 10 mm dia, 6 mm dia. shaft		AC 16 mm, slotted AM 25 mm, slotted AL 50 mm, plain					
	locking H 6 mm dia, 3 mm dia. shaft		L 12.5 mm, slotted AP special shafts					
	VP 9.5 mm dia, 6 mm dia. shaft		AC 13 mm, slotted AM 22 mm, slotted AL 47 mm, plain					

SAP PART NUMBERING GUIDELINES																	
P	1	3	T	A	B	2	2	3	M	A	B	1	7				
MODEL			BUSHING	SHAFT		OHMIC VALUE			TOL	LAW	PACKAGING		SPECIAL (IF APPLICABLE)				

See the end of this data book for conversion tables



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.