


Conformal Coating, Single-In-Line Thin Film Resistor Networks



These networks are designed to be used in analog circuits in conjunction with operational amplifiers. In addition to the standard models, Vishay also offers semi-custom or custom networks.

FEATURES

- Standard design - no NRE
- Low TCR (10 ppm/°C)
- Excellent TCR tracking (< 2 ppm/°C)
- Low noise (< - 35 dB)
- High stability (0.005 % on ratio, after 2000 h at Pn at + 70 °C)
- Through hole SIL resistors networks
- Compliant to RoHS Directive 2002/95/EC
- Evolution to SMD version see PRA datasheet (www.vishay.com/doc?53033)


RoHS
COMPLIANT

TYPICAL PERFORMANCE



	ABS	TRACKING
TCR	10 ppm/°C	< 2 ppm/°C
	ABS	RATIO
TOL.	0.1 %	0.02 %

SCHEMATIC

TWO EQUAL RESISTORS

$R_1 = R_2$

SMD version: see PRA datasheet





ORDERING INFORMATION

$R_1 = 1 \text{ k}\Omega$	TAS 209	50 k Ω	TAS 214
$R_1 = 2 \text{ k}\Omega$	TAS 210	100 k Ω	TAS 215
$R_1 = 5 \text{ k}\Omega$	TAS 211	200 k Ω	TAS 216
$R_1 = 10 \text{ k}\Omega$	TAS 212	500 k Ω	TAS 217
$R_1 = 20 \text{ k}\Omega$	TAS 213	1 M Ω	TAS 218

TWO EQUAL RESISTORS

$R_1 = R_2$

SMD version: see PRA datasheet




ORDERING INFORMATION

$R_1 = 1 \text{ k}\Omega$	TAS 365
$R_1 = 10 \text{ k}\Omega$	TAS 363
$R_1 = 100 \text{ k}\Omega$	TAS 348

FOUR EQUAL RESISTORS

R_1

SMD version: see PRA datasheet

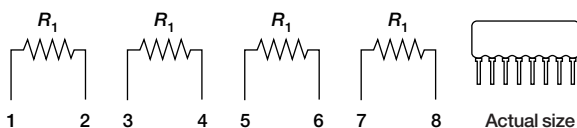


ORDERING INFORMATION

$R_1 = 1 \text{ k}\Omega$	TAS 329
$R_1 = 5 \text{ k}\Omega$	TAS 1002
$R_1 = 10 \text{ k}\Omega$	TAS 158
$R_1 = 100 \text{ k}\Omega$	TAS 288

FOUR EQUAL RESISTORS, ONE COMMON

$R_1 = R_2 = R_3 = R_4$

SMD version: see PRA datasheet



Actual size

ORDERING INFORMATION

$R_1 = 10 \text{ k}\Omega \quad \text{TAS 366}$


$R_1 = 100 \text{ k}\Omega \quad \text{TAS 367}$

RATIO DIVIDER 10:1

$R_1 + R_2 = 10 \text{ k}\Omega, 100 \text{ k}\Omega, 1 \text{ M}\Omega$

SMD version: see PRA datasheet

$$\frac{R_1 + R_2}{R_2} = 10$$



Actual size

ORDERING INFORMATION

$R_1 + R_2 = 9 \text{ k}\Omega + 1 \text{ k}\Omega = 10 \text{ k}\Omega \quad \text{TAS 280}$

$R_1 + R_2 = 90 \text{ k}\Omega + 10 \text{ k}\Omega = 100 \text{ k}\Omega \quad \text{TAS 193}$

$R_1 + R_2 = 900 \text{ k}\Omega + 100 \text{ k}\Omega = 1 \text{ M}\Omega \quad \text{TAS 281}$


RATIO DIVIDER 10:1, 100:1

$R_1 + R_2 + R_3 = 100 \text{ k}\Omega$
 $R_2 + R_3 = 10 \text{ k}\Omega$

SMD version: see PRA datasheet

$$\frac{R_1 + R_2 + R_3}{R_3} = 100$$

$$\frac{R_1 + R_2 + R_3}{R_2 + R_3} = 10$$



Actual size

ORDERING INFORMATION

$R_1 + R_2 + R_3 = 100 \text{ k}\Omega \quad \text{TAS 330}$

with $R_1 = 90 \text{ k}\Omega$



$R_2 = 9 \text{ k}\Omega$

$R_3 = 1 \text{ k}\Omega$

RATIO DIVIDER 100:1

$R_1 + R_2 = 10 \text{ M}\Omega$

$$\frac{R_1 + R_2}{R_1} = 100$$



Actual size

ORDERING INFORMATION

$R_1 + R_2 = 10 \text{ M}\Omega \quad \text{TAS 112}$



with $R_1 = 100 \text{ k}\Omega$

$R_2 = 9.9 \text{ M}\Omega$

EIGHT EQUAL RESISTORS, ONE COMMON

$R_1 = R_2 = R_3 = R_4 = R_5 = R_6 = R_7 = R_8$

SMD version: see PRA datasheet



Actual size

ORDERING INFORMATION


$R_1 = 10 \text{ k}\Omega \quad \text{TAS 368}$

$R_1 = 100 \text{ k}\Omega \quad \text{TAS 369}$

DIVIDER NETWORK 10:1

$$\frac{R_2}{R_1} = \frac{R_4}{R_3} = 10$$

SMD version: see PRA datasheet



Actual size

ORDERING INFORMATION

TAS 220


with $R_1 = R_2 = 10 \text{ k}\Omega$

$R_2 = R_4 = 100 \text{ k}\Omega$

DIVIDER NETWORK 10:1

$$\frac{R_1}{R_2} = 10$$

SMD version: see PRA datasheet




Actual size

ORDERING INFORMATION

$R_1 = 100 \text{ k}\Omega, R_2 = 10 \text{ k}\Omega \quad \text{TAS 282}$

$R_1 = 1 \text{ M}\Omega, R_2 = 100 \text{ k}\Omega \quad \text{TAS 283}$


EIGHT RESISTORS NETWORK

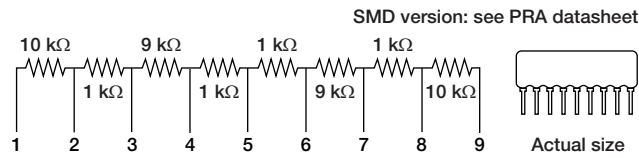

ORDERING INFORMATION

TAS 272

DIVIDER NETWORK 10:1

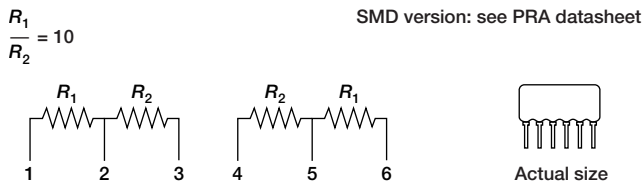


ORDERING INFORMATION

$R_1 = 10 \text{ k}\Omega, R_2 = 1 \text{ k}\Omega$ TAS 328

$R_1 = 100 \text{ k}\Omega, R_2 = 10 \text{ k}\Omega$ TAS 284

$R_1 = 1 \text{ M}\Omega, R_2 = 100 \text{ k}\Omega$ TAS 285

DIVIDER NETWORK 1:1

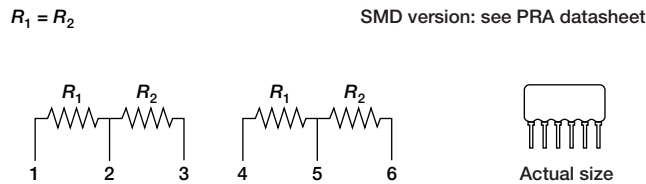

ORDERING INFORMATION

$R_1 = 5 \text{ k}\Omega$ TAS 225

$R_1 = 10 \text{ k}\Omega$ TAS 286


$R_1 = 100 \text{ k}\Omega$ TAS 219

$R_1 = 1 \text{ M}\Omega$ TAS 287

STANDARD ELECTRICAL SPECIFICATIONS

TEST	SPECIFICATIONS	CONDITIONS
MATERIAL	PASSIVATED NICHROME	
TCR	Tracking	< 2 ppm/°C
	Absolute	± 15 ppm/°C ± 10 ppm/°C
Tolerance	Ratio	± 0.05 % (± 0.02 % or ± 0.01 % on request)
	Absolute	± 0.1 %
Power rating	Resistor	100 mW
	Package	Varies with size
Stability (ΔR ratio)	0.005 %	2000 h at + 70 °C at Pn
Voltage coefficient	< 0.002 ppm/V	
Working voltage	100 V	
Operating temperature range	- 40 °C to + 125 °C	
Storage temperature range	- 55 °C to + 125 °C	
Noise	- 35 dB typical	
Thermal EMF	0.1 $\mu\text{V}/^\circ\text{C}$	
Shelf life stability	50 ppm maximum	1 year

DIMENSIONS

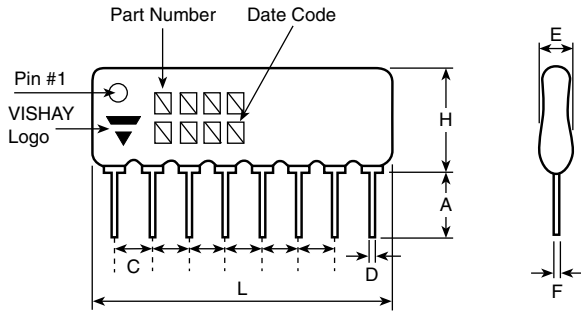

Marking: The pin 1, series and model, Vishay trademark, manufacturing date (year, week)

DIMENSION	INCHES	MILLIMETERS
A	0.124	3.17 minimum
C	0.100	2.54
D	0.020	0.51
H	0.260	6.62 maximum
E	0.100	2.54 maximum
F	0.010	0.25

PIN COUNT	3	4	5	6	7	8	9	10
L max. Inches	0.320	0.420	0.520	0.620	0.720	0.820	0.920	1.020
Millimeters	8.14	10.68	13.23	15.78	18.32	20.87	23.40	25.95

MECHANICAL SPECIFICATIONS	
Resistive element	Passivated nichrome
Substrate material	Alumina
Body	Epoxy-conformal coating
Terminals	Tin/silver on Cu alloy
Marking resistance to solvents	Laser marking

For custom specification a specific part number will be issued by Vishay Sfernice. E.g. CNS1128.

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: TAS214BW (preferred part number format)

T	A	S	2	1	4	B	W
GLOBAL MODEL	REFERENCE	ABS. TOLERANCE					RATIO TOLERANCE
TAS	(see list)	B = 0.1 %					W = 0.05 % P = 0.02 %

Custom Network: CNS 1128

CNS	1128
GLOBAL MODEL	REFERENCE

Historical Part Number example: TAS 214 50K 0.1 % 0.05 % e2 (will continue to be accepted)

TAS	214	50K	0.1 %	0.05 %	e2
HISTORICAL MODEL	REFERENCE	OHMIC VALUE	ABS. TOLERANCE	RATIO TOLERANCE	RoHS



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.