

# Nichrome Thin Film, Center Tapped Resistor Divider Network



Product may not be to scale

The CTN series is a center tapped nichrome resistor chip providing excellent stability at 250 mW power levels.

The CTN offers the designer flexibility in use as either a single value resistor or as two resistors with a center tap feature. The CTNs six bonding pads allows the user increased layout flexibility.

The CTNs are manufactured using Vishay Electro-Films (EFI) sophisticated thin film equipment and manufacturing technology. The CTNs are 100 % electrically tested and visually inspected to MIL-STD-883, method 2032 class H or K.

## FEATURES

- Wire bondable
- Center tap feature
- Chip size: 0.030" x 0.030"
- Case: 0303
- Resistance range total: 10  $\Omega$  to 1 M $\Omega$
- Ratio tolerances to: 0.1 %
- Resistor material: Nichrome
- Oxidized silicon substrate for good power dissipation

## APPLICATIONS

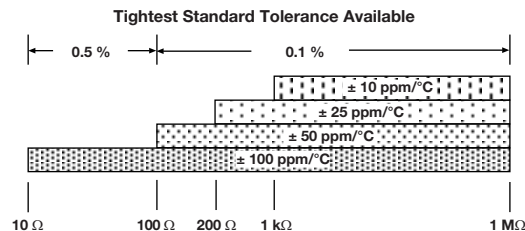
The CTN center-tapped resistor chips are used mainly in feedback circuits of amplifiers where ratio matching, high power and tracking between two resistors is critical. Recommended for Hermetic environment where die is not exposed to moisture.

For low values, the resistance of the six bonding-pad configurations can vary, depending on the method of measurement used.

Vishay EFI measures low-value resistors by the four wire Kelvin technique.

## TEMPERATURE COEFFICIENT OF RESISTANCE, VALUES, AND TOLERANCES

PARAMETER	VALUE	UNIT
Total Resistance Range	10 to 1M	$\Omega$
Standard Tolerances	$\pm 0.1, \pm 0.5$	%
TCR	$\pm 10, \pm 25, \pm 50, \pm 100$	ppm/ $^{\circ}$ C

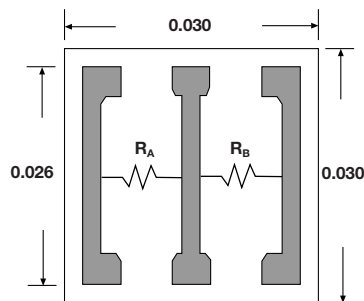






## STANDARD ELECTRICAL SPECIFICATIONS

PARAMETER	VALUE	UNIT
TCR Tracking Between Halves ( $R_A/R_B$ ) <sup>(1)</sup>	$\pm 2$	ppm/ $^{\circ}$ C
Center Tap Ratio, $R_A/R_B$ : Tolerance	1 $\pm$ 1 standard	%
Noise, MIL-STD-202, Method 308, 100 $\Omega$ to 250 k $\Omega$	- 35 typ.	dB
Stability, 1000 h, + 125 $^{\circ}$ C, 125 mW	$\pm 0.1$ max. $\Delta R/R$	%
Operating Temperature Range	- 55 to + 125	$^{\circ}$ C
Dielectric Voltage Breakdown	200	V
Insulation Resistance	10 <sup>12</sup> min.	$\Omega$
Operating Voltage	100 max.	V
DC Power Rating at + 70 $^{\circ}$ C (derated to zero at + 175 $^{\circ}$ C)	0.25 max.	W

### Note

<sup>(1)</sup> 20 ppm/ $^{\circ}$ C for  $R < 20$

**DIMENSIONS** in inches

**STANDARD CONFIGURATION**  
 Six locations. All pads 0.005 x 0.005 inch

**TYPICAL RANGE**  
 10 Ω to 26 Ω

**TYPICAL RANGE**  
 27 Ω to 99 Ω

**TYPICAL RANGE**  
 100 Ω to 1 MΩ

**SCHEMATIC**


MECHANICAL SPECIFICATIONS	
PARAMETER	VALUE
Chip Size	0.030" x 0.030" ± 0.002" (0.762 mm x 0.762 mm ± 0.050 mm)
Chip Thickness	0.010" ± 0.002" (0.254 mm ± 0.05 mm)
Chip Substrate Material	Oxidized silicon, 10 kÅ minimum SiO <sub>2</sub>
Resistor Material	Nichrome
Bonding Pad Size	0.005" x 0.005" (0.127 mm x 0.127 mm) min.
Number of Pads	6
Pad Material	15 kÅ minimum gold (Au optional)
Backing	None, lapped semiconductor silicon (Au optional)

**Options:** Alphanumeric part marking, up to six characters.

GLOBAL PART NUMBER INFORMATION																
Global Part Number: <b>CTN5000KCKKGNHWS</b>																
Global Part Number Description: <b>CTN 5K 10% RT 0.25% ± 100 ppm/°C ± 10 ppm/°C Au None H WS</b>																
<b>C</b>	<b>T</b>	<b>N</b>	<b>5</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>K</b>	<b>C</b>	<b>K</b>	<b>K</b>	<b>G</b>	<b>N</b>	<b>H</b>	<b>W</b>	<b>S</b>
MODEL	RESISTANCE (R TOTAL)	RESISTANCE MULTIPLIER CODE	TOL. CODE (%)	RATIO TOL. (%)	TCR (ppm/°C)	TCR TRACK (ppm/°C)	TERMINATION	BACK METAL	VISUAL CLASS	PACKAGING CODE						
<b>CTN</b>	First 4 digits are significant figures of resistance	<b>B</b> = 0.01 <b>A</b> = 0.1 <b>0</b> = 1 <b>1</b> = 10 <b>2</b> = 100 <b>3</b> = 1000	<b>B</b> = 0.1 <b>C</b> = 0.25 <b>D</b> = 0.5 <b>F</b> = 1.0 <b>G</b> = 2.0 <b>J</b> = 5.0 <b>K</b> = 10.0	<b>B</b> = 0.1 <b>C</b> = 0.25 <b>D</b> = 0.5 <b>F</b> = 1.0 <b>G</b> = 2.0 <b>N</b> = No	<b>B</b> = ± 10 <b>E</b> = ± 25 <b>C</b> = ± 50 <b>K</b> = ± 100	<b>G</b> = ± 2 <b>J</b> = ± 5 <b>K</b> = ± 10 <b>N</b> = No	<b>G</b> = Au <b>A</b> = Al	<b>G</b> = Au <b>N</b> = None	<b>H</b> = Class H <b>K</b> = Class K	<b>WS</b> = Waffle pack 100 min., 1 mult						



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.