


R-C Thermal Model Parameters

DESCRIPTION

The parametric values in the R-C thermal model have been derived using curve-fitting techniques. R-C values for the electrical circuit in the Foster/tank and Cauer/filter configurations are included. When implemented in P-SPICE, these values have matching characteristic curves to the single-pulse transient thermal impedance curves for the MOSFET.

These RC values can be used in the P-SPICE simulation to evaluate the thermal behavior of the MOSFET junction temperature under a defined power profile. These techniques are described in application note AN609, "Thermal Simulation of Power MOSFETs on the P-SPICE Platform".

R-C THERMAL MODEL FOR TANK CONFIGURATION

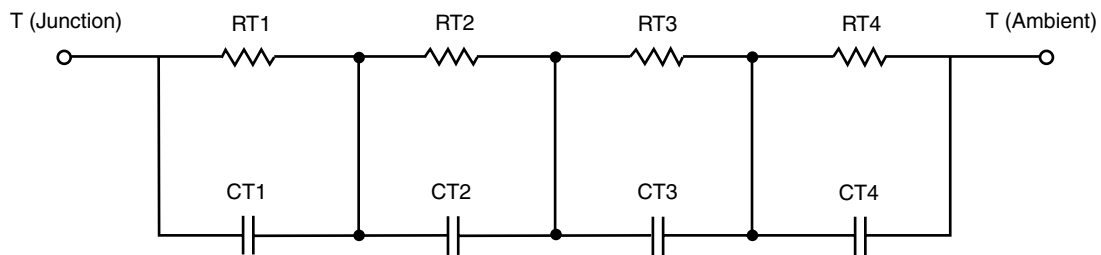


R-C VALUES FOR TANK CONFIGURATION			
THERMAL RESISTANCE (°C/W)			
Junction to	Ambient	Case	Foot
RT1	1.3326	213.2987 m	N/A
RT2	7.1225	244.8663 m	N/A
RT3	8.5839	873.9002m	N/A
RT4	47.9610	967.9348 m	N/A
THERMAL CAPACITANCE (Joules/°C)			
Junction to	Ambient	Case	Foot
CT1	9.0273 m	1.2460 m	N/A
CT2	68.8788 m	2.4651 m	N/A
CT3	458.1631 m	9.0575 m	N/A
CT4	1.5389	17.9119 m	N/A

Note

N/A indicates not applicable

This document is intended as a SPICE modeling guideline and does not constitute a commercial product datasheet. Designers should refer to the appropriate datasheet of the same number for guaranteed specification limits.

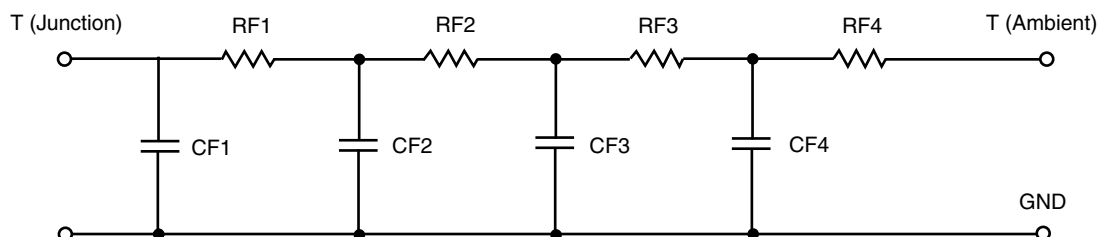R-C THERMAL MODEL FOR FILTER CONFIGURATION**R-C VALUES FOR FILTER CONFIGURATION**

THERMAL RESISTANCE (°C/W)			
Junction to	Ambient	Case	Foot
RF1	3.8804	528.7994 m	N/A
RF2	10.4091	894.2351 m	N/A
RF3	19.6239	832.3065 m	N/A
RF4	31.0866	44.6590 m	N/A
THERMAL CAPACITANCE (Joules/°C)			
Junction to	Ambient	Case	Foot
CF1	13.0526 m	715.9232 u	N/A
CF2	78.5055 m	4.1535 m	N/A
CF3	718.0263 m	8.4269 m	N/A
CF4	1.3336	3.1320 m	N/A

Note

N/A indicates not applicable

