PowerPAIR 6 x 3.7 CARRIER TAPE

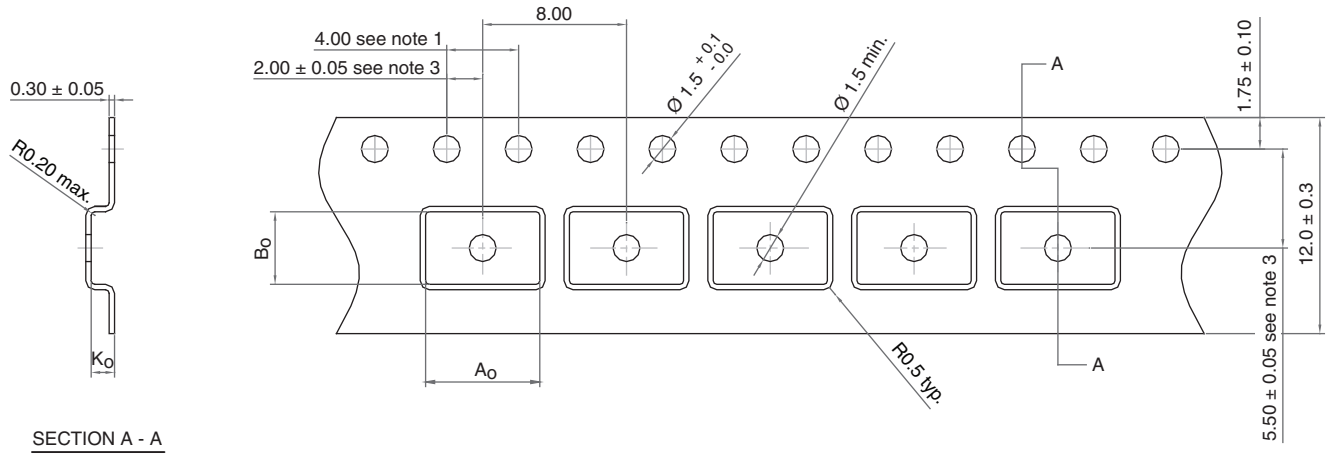

A_O = 6.35
B_O = 4.03
K_O = 1.30

Notes

1. 10 sprocket hole pitch cumulative tolerance ± 0.2 mm.
2. Camber not to exceed 1 mm in 100 mm, also not to exceed 1.5 cm in 1 m actually.
3. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
4. Material: PS and C.
5. Tolerance will be ± 0.1 mm unless specified.
6. Vishay part number must be labeled at all reels of cover and carrier tape.
7. Surface resistivity - 10^5 max. Ω/sq.

ECN: C10-0947-Rev. C, 18-Oct-10
DWG: 93-5264-X