MINIQFN-8L CARRIER TAPE

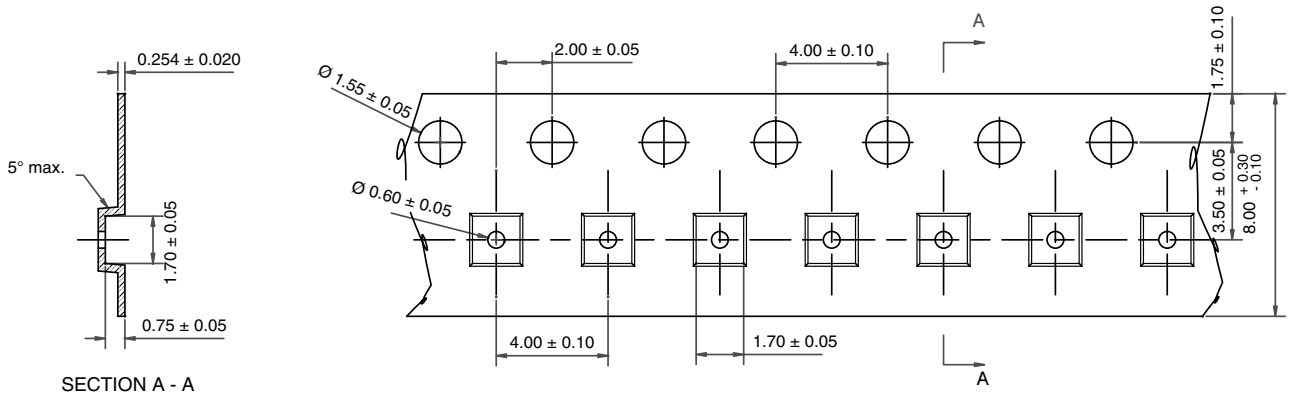

Notes

1. 10 sprocket hole pitch cumulative tolerance ± 0.2 mm.
2. Camber not to exceed 1 mm in 100 mm, also not to exceed 1.5 cm in 1 m actually.
3. Material: Black conductive poly carbonate.
4. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
5. Pocket center and pocket hole center must be same position.
6. General tolerance ± 0.2.
7. Vishay part number must be labeled at all reels of cover and carrier tape.
8. Surface resistivity - 10^5 max. Ω/sq.

ECN C10-0949-Rev. B, 04-Oct-10
DWG: 93-5256-X