MLP33-5 PowerPAK®

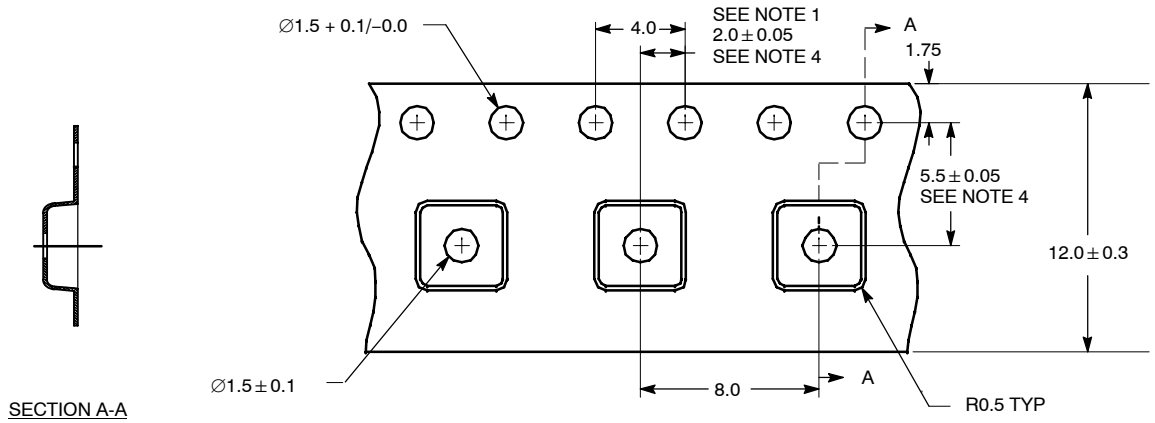

NOTES:
1. 10 sprocket hole pitch cumulative tolerance ± 0.2.
2. Camber not to exceed 1 mm in 100 mm.
3. Material: PS + C or PC
4. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
5. All sizes in mm unless specified.

QUANTITY PER REEL	
T1	3000
ECN: S-40728—Rev. B, 17-May-04 DWG: 93-5233-x	