




## High Speed Optocoupler, Single and Dual, 10 MBd



### LINKS TO ADDITIONAL RESOURCES

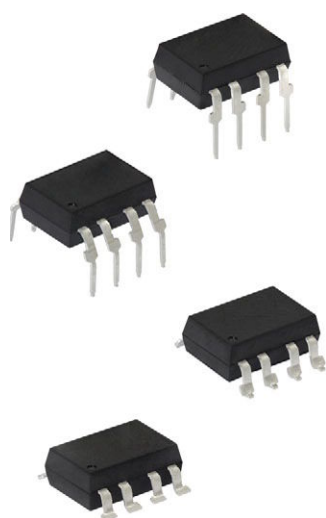

3D Models



Design Tools



Related Documents

### DESCRIPTION

The 6N137, VO2601, and VO2611 are single channel 10 MBd optocouplers utilizing a high efficient input LED coupled with an integrated optical photodiode IC detector. The detector has an open drain NMOS-transistor output, providing less leakage compared to an open collector Schottky clamped transistor output. The VO2630, VO2631, and VO4661 are dual channel 10 MBd optocouplers. For the single channel type, an enable function on pin 7 allows the detector to be strobed. The internal shield provides a guaranteed common mode transient immunity of 5 kV/μs for the VO2601 and VO2631 and 15 kV/μs for the VO2611 and VO4661. The use of a 0.1 μF bypass capacitor connected between pin 5 and 8 is recommended.

### FEATURES

- Choice of CMR performance of 15 kV/μs, 5 kV/μs, and 1000 V/μs
- High speed: 10 MBd typical
- +5 V CMOS compatibility
- Pure tin leads
- Guaranteed AC and DC performance over temperature
- Meets IEC 60068-2-42 (SO<sub>2</sub>) and IEC 60068-2-43 (H<sub>2</sub>S) requirements
- Low input current capability of 5 mA
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)


RoHS  
COMPLIANT



### APPLICATIONS

- Microprocessor system interface
- PLC, ATE input / output isolation
- Computer peripheral interface
- Digital fieldbus isolation: CC-link, DeviceNet, profibus, SDS
- High speed A/D and D/A conversion
- AC plasma display panel level shifting
- Multiplexed data transmission
- Digital control power supply
- Ground loop elimination, noise isolation

### AGENCY APPROVALS

- [UL1577](#)
- [cUL](#)
- [DIN EN 60747-5-5 \(VDE 0884-5\) available with option 1](#)
- [CQC GB8898-2011](#)
- [CQC GB4943.1-2011](#)

### ORDERING INFORMATION

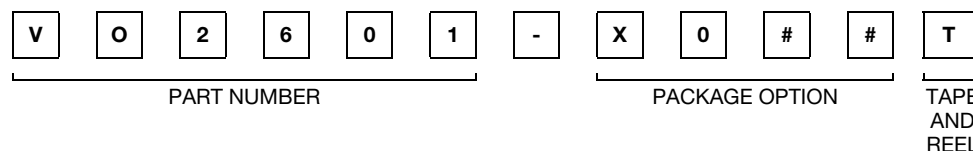

| AGENCY CERTIFIED / PACKAGE | CHANNELS 1  |              |              | CHANNELS 2   |              |              |
|----------------------------|-------------|--------------|--------------|--------------|--------------|--------------|
|                            | CMR (V/μs)  |              |              | CMR (V/μs)   |              |              |
| UL, cUL, CQC               | 1000        | 5000         | 15 000       | 1000         | 5000         | 15 000       |
| DIP-8                      | 6N137       | VO2601       | VO2611       | VO2630       | VO2631       | VO4661       |
| DIP-8, 400 mil (option 6)  | 6N137-X006  | VO2601-X006  | VO2611-X006  | -            | VO2631-X006  | VO4661-X006  |
| SMD-8 (option 7)           | 6N137-X007T | VO2601-X007T | VO2611-X007T | VO2630-X007T | VO2631-X007T | VO4661-X007T |
| SMD-8 (option 9)           | 6N137-X009T | -            | -            | VO2630-X009T | -            | -            |
| VDE, UL, cUL, CQC          | 1000        | 5000         | 15 000       | 1000         | 5000         | 15 000       |
| DIP-8, 400 mil (option 6)  | -           | -            | VO2611-X016  | -            | -            | -            |
| SMD-8 (option 7)           | -           | VO2601-X017T | VO2611-X017T | -            | VO2631-X017T | -            |



| TRUTH TABLE (positive logic) |        |        |
|------------------------------|--------|--------|
| LED                          | ENABLE | OUTPUT |
| On                           | H      | L      |
| Off                          | H      | H      |
| On                           | L      | H      |
| Off                          | L      | H      |
| On                           | NC     | L      |
| Off                          | NC     | H      |

| ABSOLUTE MAXIMUM RATINGS ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |                              |            |                         |                    |
|-------------------------------------------------------------------------------------------------|------------------------------|------------|-------------------------|--------------------|
| PARAMETER                                                                                       | CONDITIONS                   | SYMBOL     | VALUE                   | UNIT               |
| INPUT                                                                                           |                              |            |                         |                    |
| Average forward current (single channel)                                                        |                              | $I_F$      | 20                      | mA                 |
| Average forward current (per channel for dual channel)                                          |                              | $I_F$      | 15                      | mA                 |
| Reverse input voltage                                                                           |                              | $V_R$      | 5                       | V                  |
| Enable input voltage                                                                            |                              | $V_E$      | $V_{CC} + 0.5\text{ V}$ | V                  |
| Enable input current                                                                            |                              | $I_E$      | 5                       | mA                 |
| Surge current                                                                                   | $t = 100\text{ }\mu\text{s}$ | $I_{FSM}$  | 200                     | mA                 |
| Output power dissipation (single channel)                                                       |                              | $P_{diss}$ | 35                      | mW                 |
| Output power dissipation (per channel for dual channel)                                         |                              | $P_{diss}$ | 25                      | mW                 |
| OUTPUT                                                                                          |                              |            |                         |                    |
| Supply voltage                                                                                  | 1 min maximum                | $V_{CC}$   | 7                       | V                  |
| Output current                                                                                  |                              | $I_O$      | 50                      | mA                 |
| Output voltage                                                                                  |                              | $V_O$      | 7                       | V                  |
| Output power dissipation (single channel)                                                       |                              | $P_{diss}$ | 85                      | mW                 |
| Output power dissipation (per channel for dual channel)                                         |                              | $P_{diss}$ | 60                      | mW                 |
| COUPLER                                                                                         |                              |            |                         |                    |
| Storage temperature                                                                             |                              | $T_{stg}$  | -55 to +150             | $^{\circ}\text{C}$ |
| Operating temperature                                                                           |                              | $T_{amb}$  | -40 to +100             | $^{\circ}\text{C}$ |
| Lead solder temperature                                                                         | for 10 s                     |            | 260                     | $^{\circ}\text{C}$ |
| Solder reflow temperature                                                                       |                              |            | 260                     | $^{\circ}\text{C}$ |

## Note

- Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute maximum ratings for extended periods of the time can adversely affect reliability.

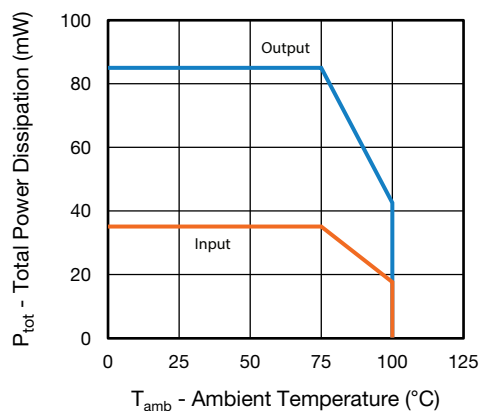


Fig. 1 - Total Power Dissipation vs. Ambient Temperature (single channel)

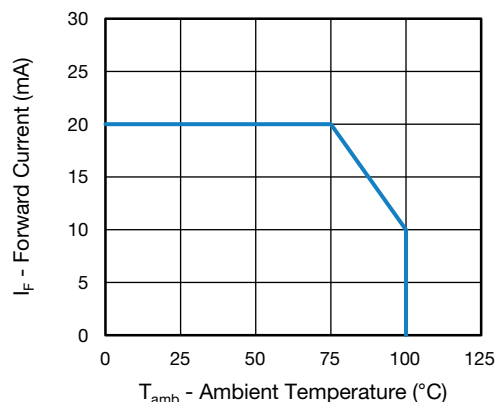


Fig. 3 - Forward Current vs. Ambient Temperature (single channel)

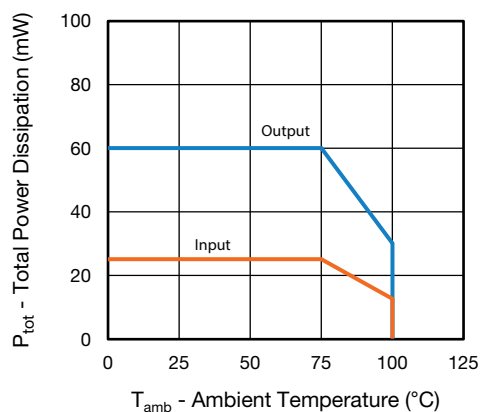


Fig. 2 - Total Power Dissipation vs. Ambient Temperature (dual channel)

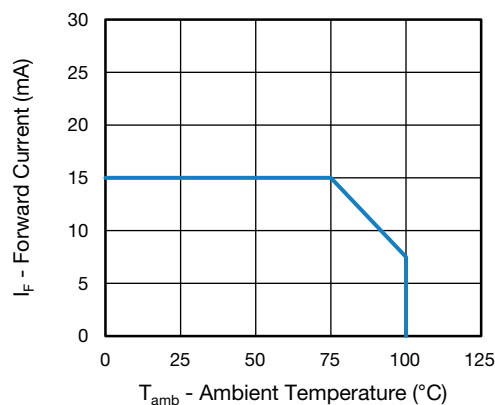


Fig. 4 - Forward Current vs. Ambient Temperature (dual channel)

| RECOMMENDED OPERATING CONDITIONS |                       |                  |      |                 |      |
|----------------------------------|-----------------------|------------------|------|-----------------|------|
| PARAMETER                        | TEST CONDITION        | SYMBOL           | MIN. | MAX.            | UNIT |
| Operating temperature            |                       | T <sub>amb</sub> | -40  | 100             | °C   |
| Supply voltage                   |                       | V <sub>CC</sub>  | 4.5  | 5.5             | V    |
| Input current low level          |                       | I <sub>FL</sub>  | 0    | 250             | μA   |
| Input current high level         |                       | I <sub>FH</sub>  | 5    | 15              | mA   |
| Logic high enable voltage        |                       | V <sub>EH</sub>  | 2    | V <sub>CC</sub> | V    |
| Logic low enable voltage         |                       | V <sub>EL</sub>  | 0    | 0.8             | V    |
| Output pull up resistor          |                       | R <sub>L</sub>   | 330  | 4K              | Ω    |
| Fanout                           | R <sub>L</sub> = 1 kΩ | N                | -    | 5               | -    |



| <b>ELECTRICAL CHARACTERISTICS</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |                                                                                           |           |      |       |      |               |
|----------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-----------|------|-------|------|---------------|
| PARAMETER                                                                                                | TEST CONDITION                                                                            | SYMBOL    | MIN. | TYP.  | MAX. | UNIT          |
| <b>INPUT</b>                                                                                             |                                                                                           |           |      |       |      |               |
| Input forward voltage                                                                                    | $I_F = 10\text{ mA}$                                                                      | $V_F$     | 1.1  | 1.4   | 1.7  | V             |
| Reverse current                                                                                          | $V_R = 5\text{ V}$                                                                        | $I_R$     | -    | 0.01  | 10   | $\mu\text{A}$ |
| Input capacitance                                                                                        | $f = 1\text{ MHz}$ , $V_F = 0\text{ V}$                                                   | $C_I$     | -    | 55    | -    | pF            |
| <b>OUTPUT</b>                                                                                            |                                                                                           |           |      |       |      |               |
| High level supply current (single channel)                                                               | $V_E = 0.5\text{ V}$ , $I_F = 0\text{ mA}$                                                | $I_{CCH}$ | -    | 4.1   | 7    | mA            |
|                                                                                                          | $V_E = V_{CC}$ , $I_F = 0\text{ mA}$                                                      | $I_{CCH}$ | -    | 3.3   | 6    | mA            |
| High level supply current (dual channel)                                                                 | $I_F = 0\text{ mA}$                                                                       | $I_{CCH}$ | -    | 6.5   | 12   | mA            |
| Low level supply current (single channel)                                                                | $V_E = 0.5\text{ V}$ , $I_F = 10\text{ mA}$                                               | $I_{CCL}$ | -    | 4     | 7    | mA            |
|                                                                                                          | $V_E = V_{CC}$ , $I_F = 10\text{ mA}$                                                     | $I_{CCL}$ | -    | 3.3   | 6    | mA            |
| Low level supply current (dual channel)                                                                  | $I_F = 10\text{ mA}$                                                                      | $I_{CCL}$ | -    | 6.5   | 12   | mA            |
| High level output current                                                                                | $V_E = 2\text{ V}$ , $V_{CC} = 5.5\text{ V}$ , $I_F = 250\text{ }\mu\text{A}$             | $I_{OH}$  | -    | 0.002 | 1    | $\mu\text{A}$ |
| Low level output voltage                                                                                 | $V_E = 2\text{ V}$ , $I_F = 5\text{ mA}$ ,<br>$I_{OL}(\text{sinking}) = 13\text{ mA}$     | $V_{OL}$  | -    | 0.2   | 0.6  | V             |
| Input threshold current                                                                                  | $V_E = 2\text{ V}$ , $V_{CC} = 5.5\text{ V}$ ,<br>$I_{OL}(\text{sinking}) = 13\text{ mA}$ | $I_{TH}$  | -    | 2.4   | 5    | mA            |
| High level enable current                                                                                | $V_E = 2\text{ V}$                                                                        | $I_{EH}$  | -    | -0.6  | -1.6 | mA            |
| Low level enable current                                                                                 | $V_E = 0.5\text{ V}$                                                                      | $I_{EL}$  | -    | -0.8  | -1.6 | mA            |
| High level enable voltage                                                                                |                                                                                           | $V_{EH}$  | 2    | -     | -    | V             |
| Low level enable voltage                                                                                 |                                                                                           | $V_{EL}$  | -    | -     | 0.8  | V             |


**Note**

- Minimum and maximum values are testing requirements. Typical values are characteristics of the device and are the result of engineering evaluation. Typical values are for information only and are not part of the testing requirements.

| <b>SWITCHING CHARACTERISTICS</b>                           |                                                                                                     |                       |      |      |                   |      |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|-----------------------|------|------|-------------------|------|
| PARAMETER                                                  | TEST CONDITION                                                                                      | SYMBOL                | MIN. | TYP. | MAX.              | UNIT |
| Propagation delay time to high output level                | $R_L = 350\text{ }\Omega$ , $C_L = 15\text{ pF}$                                                    | $t_{PLH}$             | 20   | 48   | 75 <sup>(1)</sup> | ns   |
|                                                            |                                                                                                     | $t_{PLH}$             | -    | -    | 100               | ns   |
| Propagation delay time to low output level                 | $R_L = 350\text{ }\Omega$ , $C_L = 15\text{ pF}$                                                    | $t_{PHL}$             | 25   | 50   | 75 <sup>(1)</sup> | ns   |
|                                                            |                                                                                                     | $t_{PHL}$             | -    | -    | 100               | ns   |
| Pulse width distortion                                     | $R_L = 350\text{ }\Omega$ , $C_L = 15\text{ pF}$                                                    | $ t_{PHL} - t_{PLH} $ | -    | 2.9  | 35                | ns   |
| Propagation delay skew                                     | $R_L = 350\text{ }\Omega$ , $C_L = 15\text{ pF}$                                                    | $t_{PSK}$             | -    | 8    | 40                | ns   |
| Output rise time (10 % to 90 %)                            | $R_L = 350\text{ }\Omega$ , $C_L = 15\text{ pF}$                                                    | $t_r$                 | -    | 23   | -                 | ns   |
| Output fall time (90 % to 10 %)                            | $R_L = 350\text{ }\Omega$ , $C_L = 15\text{ pF}$                                                    | $t_f$                 | -    | 7    | -                 | ns   |
| Propagation delay time of enable from $V_{EH}$ to $V_{EL}$ | $R_L = 350\text{ }\Omega$ , $C_L = 15\text{ pF}$ ,<br>$V_{EL} = 0\text{ V}$ , $V_{EH} = 3\text{ V}$ | $t_{ELH}$             | -    | 12   | -                 | ns   |
| Propagation delay time of enable from $V_{EL}$ to $V_{EH}$ | $R_L = 350\text{ }\Omega$ , $C_L = 15\text{ pF}$ ,<br>$V_{EL} = 0\text{ V}$ , $V_{EH} = 3\text{ V}$ | $t_{EHL}$             | -    | 11   | -                 | ns   |

**Notes**

- Over recommended temperature ( $T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+100\text{ }^{\circ}\text{C}$ ),  $V_{CC} = 5\text{ V}$ ,  $I_F = 7.5\text{ mA}$  unless otherwise specified. All typicals at  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ,  $V_{CC} = 5\text{ V}$ .
- <sup>(1)</sup> 75 ns applies to the 6N137 only, a JEDEC® registered specification

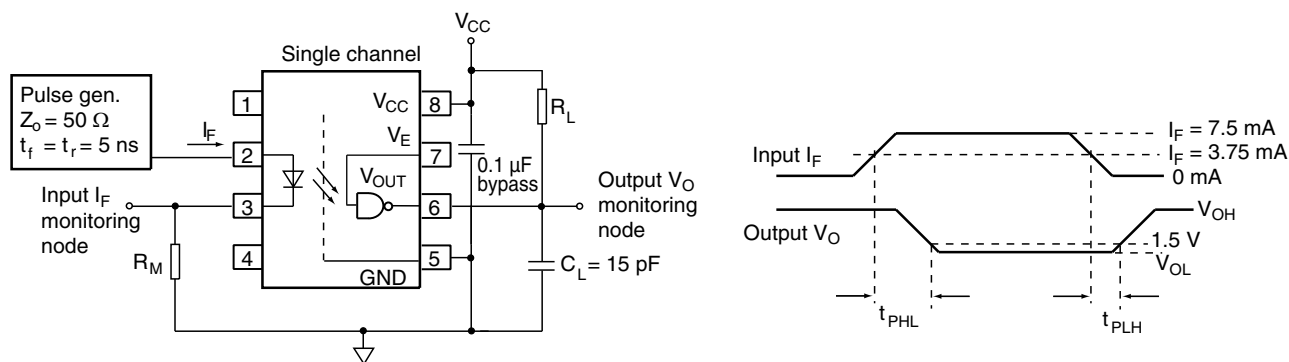

The probe and Jig capacitances are included in  $C_L$

Fig. 5 - Single Channel Test Circuit for  $t_{PLH}$ ,  $t_{PHL}$ ,  $t_r$  and  $t_f$

18964-2


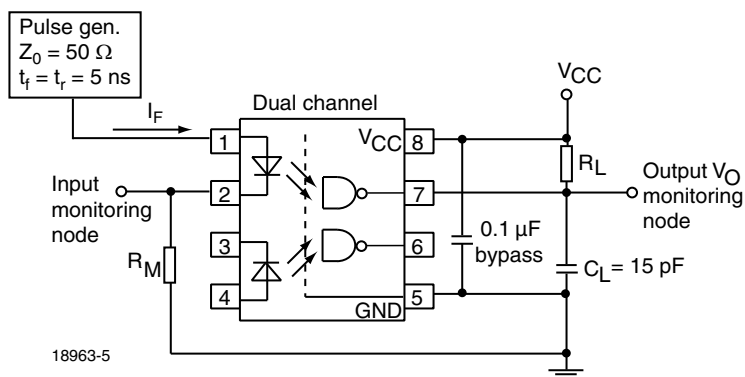


Fig. 6 - Dual Channel Test Circuit for  $t_{PLH}$ ,  $t_{PHL}$ ,  $t_r$  and  $t_f$

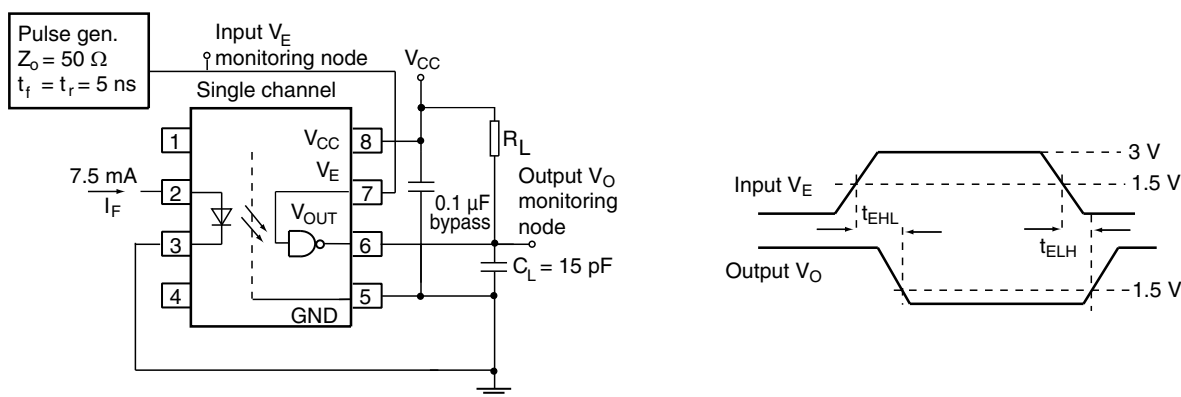

The probe and Jig capacitances are included in  $C_L$



Fig. 7 - Single Channel Test Circuit for  $t_{EHL}$  and  $t_{ELH}$

18975-2

| COMMON MODE TRANSIENT IMMUNITY ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified) |                                                                                                                                                                                  |          |        |        |      |                  |
|-------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------|--------|------|------------------|
| PARAMETER                                                                                             | TEST CONDITION                                                                                                                                                                   | SYMBOL   | MIN.   | TYP.   | MAX. | UNIT             |
| Common mode transient immunity                                                                        | $ V_{CM}  = 10\text{ V}$ , $V_{CC} = 5\text{ V}$ , $I_F = 0\text{ mA}$ , $V_{O(min.)} = 2\text{ V}$ , $R_L = 350\text{ }\Omega$ , $T_{amb} = 25\text{ }^{\circ}\text{C}$ (1)     | $ CM_H $ | 1000   | -      | -    | V/ $\mu\text{s}$ |
|                                                                                                       | $ V_{CM}  = 50\text{ V}$ , $V_{CC} = 5\text{ V}$ , $I_F = 0\text{ mA}$ , $V_{O(min.)} = 2\text{ V}$ , $R_L = 350\text{ }\Omega$ , $T_{amb} = 25\text{ }^{\circ}\text{C}$ (2)     | $ CM_H $ | 5000   | 10 000 | -    | V/ $\mu\text{s}$ |
|                                                                                                       | $ V_{CM}  = 1\text{ kV}$ , $V_{CC} = 5\text{ V}$ , $I_F = 0\text{ mA}$ , $V_{O(min.)} = 2\text{ V}$ , $R_L = 350\text{ }\Omega$ , $T_{amb} = 25\text{ }^{\circ}\text{C}$ (3)     | $ CM_H $ | 15 000 | 25 000 | -    | V/ $\mu\text{s}$ |
|                                                                                                       | $ V_{CM}  = 10\text{ V}$ , $V_{CC} = 5\text{ V}$ , $I_F = 7.5\text{ mA}$ , $V_{O(max.)} = 0.8\text{ V}$ , $R_L = 350\text{ }\Omega$ , $T_{amb} = 25\text{ }^{\circ}\text{C}$ (1) | $ CM_L $ | 1000   | -      | -    | V/ $\mu\text{s}$ |
|                                                                                                       | $ V_{CM}  = 50\text{ V}$ , $V_{CC} = 5\text{ V}$ , $I_F = 7.5\text{ mA}$ , $V_{O(max.)} = 0.8\text{ V}$ , $R_L = 350\text{ }\Omega$ , $T_{amb} = 25\text{ }^{\circ}\text{C}$ (2) | $ CM_L $ | 5000   | 10 000 | -    | V/ $\mu\text{s}$ |
|                                                                                                       | $ V_{CM}  = 1\text{ kV}$ , $V_{CC} = 5\text{ V}$ , $I_F = 7.5\text{ mA}$ , $V_{O(max.)} = 0.8\text{ V}$ , $R_L = 350\text{ }\Omega$ , $T_{amb} = 25\text{ }^{\circ}\text{C}$ (3) | $ CM_L $ | 15 000 | 25 000 | -    | V/ $\mu\text{s}$ |

## Notes

- (1) For 6N137 and VO2630  
(2) For VO2601 and VO2631  
(3) For VO2611 and VO4661

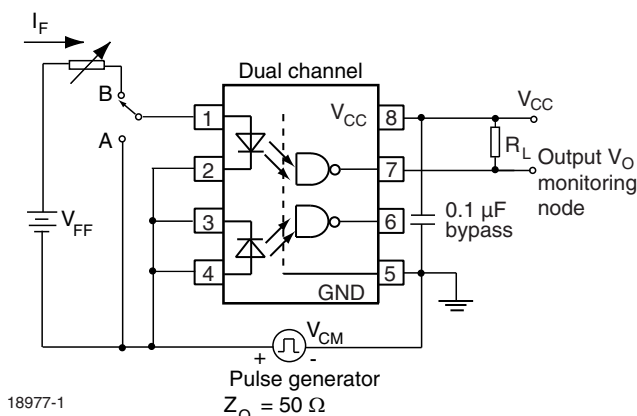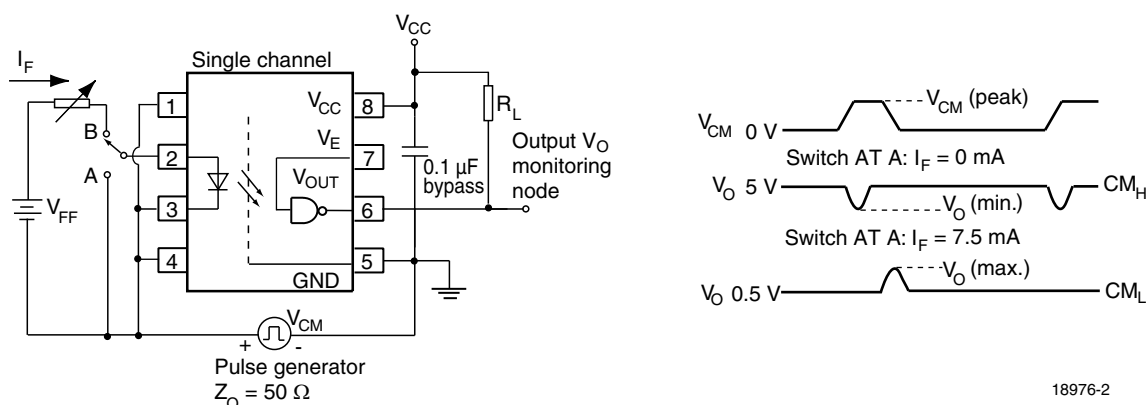



| SAFETY AND INSULATION RATINGS                |                                                                   |            |                |                    |
|----------------------------------------------|-------------------------------------------------------------------|------------|----------------|--------------------|
| PARAMETER                                    | TEST CONDITION                                                    | SYMBOL     | VALUE          | UNIT               |
| Climatic classification                      | According to IEC 68 part 1                                        |            | 40 / 100 / 21  |                    |
| Pollution degree                             | According to DIN VDE 0109                                         |            | 2              |                    |
| Comparative tracking index                   | Insulation group IIIa                                             | CTI        | 175            |                    |
| Maximum rated withstanding isolation voltage | According to UL1577, t = 1 min                                    | $V_{ISO}$  | 5300           | $V_{RMS}$          |
| Maximum transient isolation voltage          | According to DIN EN 60747-5-5                                     | $V_{IOTM}$ | 8000           | $V_{peak}$         |
| Maximum repetitive peak isolation voltage    | According to DIN EN 60747-5-5                                     | $V_{IORM}$ | 890            | $V_{peak}$         |
| Isolation resistance                         | $T_{amb} = 25\text{ }^{\circ}\text{C}$ , $V_{IO} = 500\text{ V}$  | $R_{IO}$   | $\geq 10^{12}$ | $\Omega$           |
|                                              | $T_{amb} = 100\text{ }^{\circ}\text{C}$ , $V_{IO} = 500\text{ V}$ | $R_{IO}$   | $\geq 10^{11}$ | $\Omega$           |
| Output safety power                          |                                                                   | $P_{SO}$   | 500            | mW                 |
| Input safety current                         |                                                                   | $I_{SI}$   | 300            | mA                 |
| Input safety temperature                     |                                                                   | $T_S$      | 175            | $^{\circ}\text{C}$ |
| Creepage distance                            | DIP-8                                                             |            | $\geq 7$       | mm                 |
| Clearance distance                           |                                                                   |            | $\geq 7$       | mm                 |
| Creepage distance                            | DIP-8, 400 mil (option 6)                                         |            | $\geq 8$       | mm                 |
| Clearance distance                           |                                                                   |            | $\geq 8$       | mm                 |
| Creepage distance                            | SMD-8 (option 7)                                                  |            | $\geq 8$       | mm                 |
| Clearance distance                           |                                                                   |            | $\geq 8$       | mm                 |
| Creepage distance                            | SMD-8 (option 9)                                                  |            | $\geq 8$       | mm                 |
| Clearance distance                           |                                                                   |            | $\geq 8$       | mm                 |
| Insulation thickness                         |                                                                   | DTI        | $\geq 0.4$     | mm                 |

## Note

- As per IEC 60747-5-5, § 7.4.3.8.2, this optocoupler is suitable for “safe electrical insulation” only within the safety ratings. Compliance with the safety ratings shall be ensured by means of protective circuits.

## TYPICAL CHARACTERISTICS ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified)

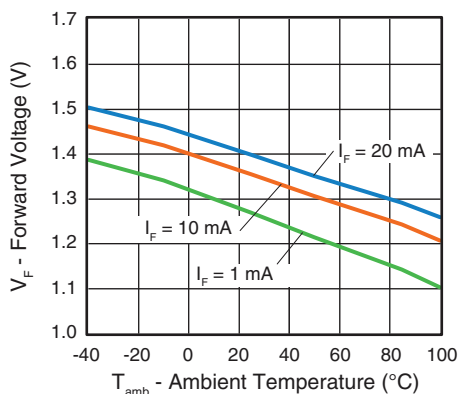


Fig. 10 - Forward Voltage vs. Ambient Temperature

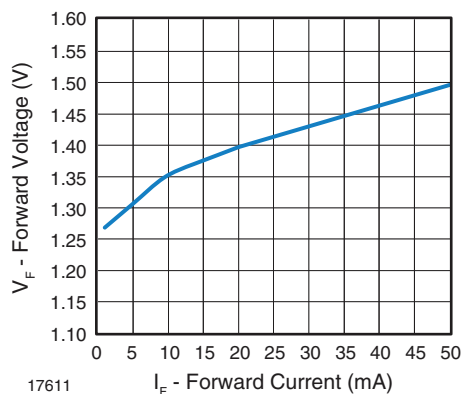


Fig. 11 - Forward Voltage vs. Forward Current

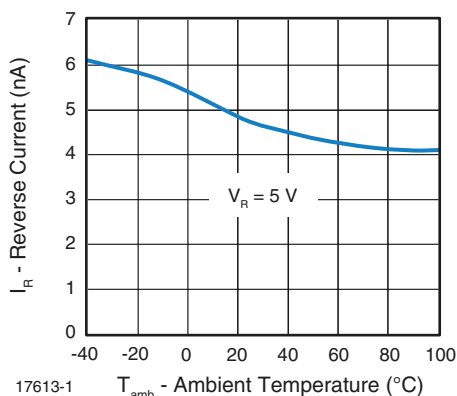


Fig. 12 - Reverse Current vs. Ambient Temperature

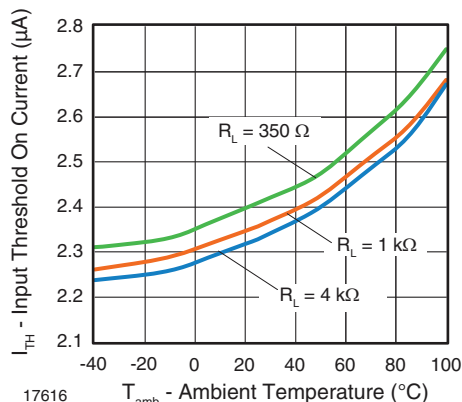


Fig. 15 - Input Threshold On Current vs. Ambient Temperature

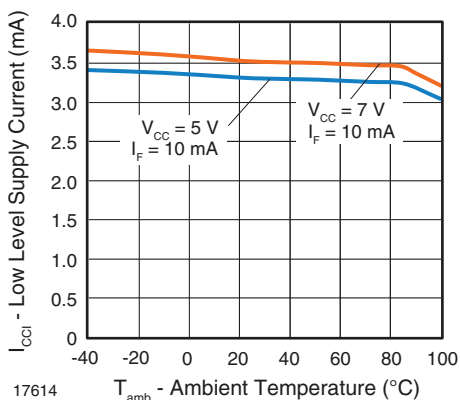


Fig. 13 - Low Level Supply Current vs. Ambient Temperature

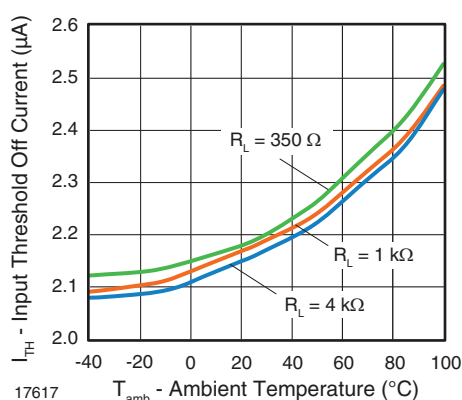


Fig. 16 - Input Threshold Off Current vs. Ambient Temperature

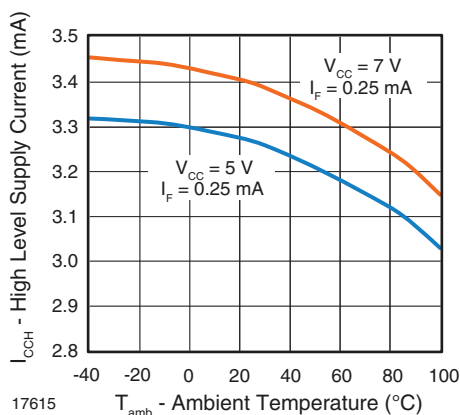


Fig. 14 - High Level Supply Current vs. Ambient Temperature

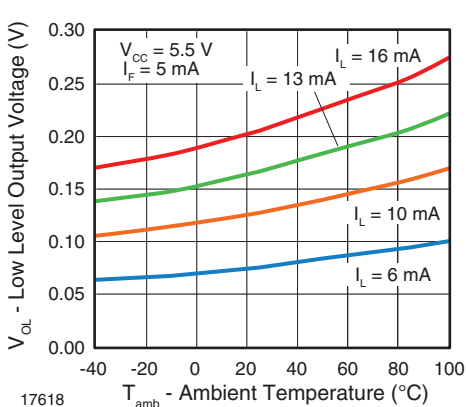


Fig. 17 - Low Level Output Voltage vs. Ambient Temperature



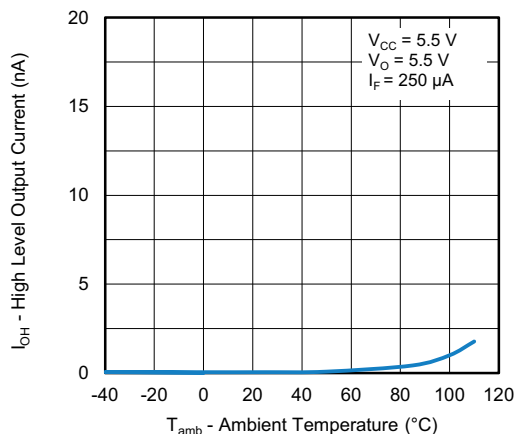


Fig. 18 - Low Level Output Current vs. Ambient Temperature

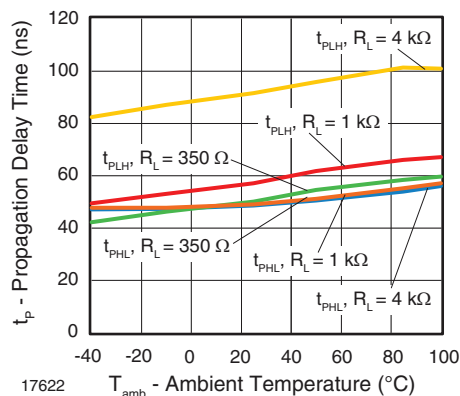


Fig. 21 - Propagation Delay vs. Ambient Temperature

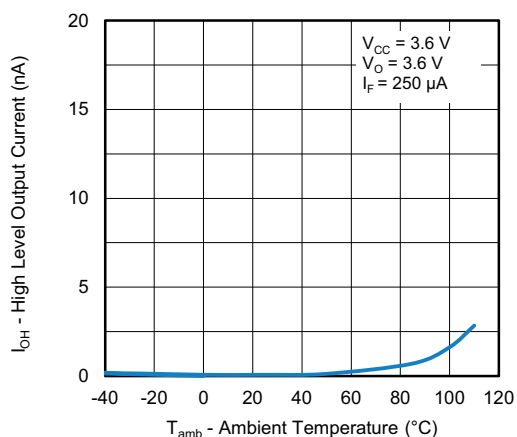


Fig. 19 - High Level Output Current vs. Ambient Temperature

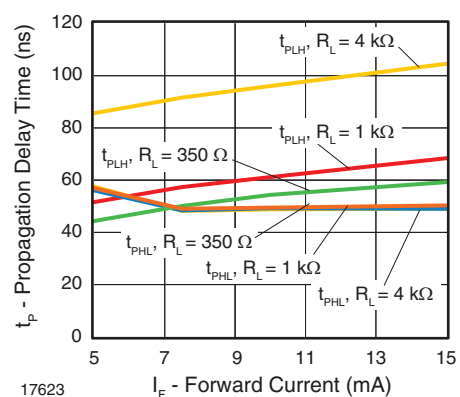


Fig. 22 - Propagation Delay vs. Forward Current

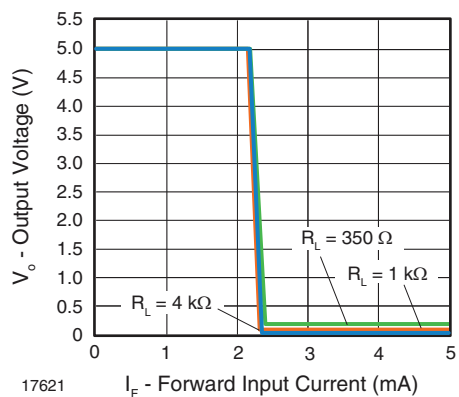


Fig. 20 - Output Voltage vs. Forward Input Current

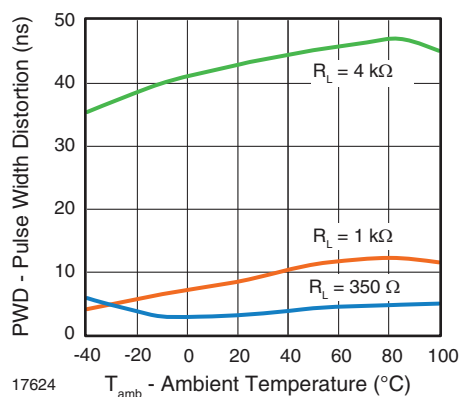


Fig. 23 - Pulse Width Distortion vs. Ambient Temperature

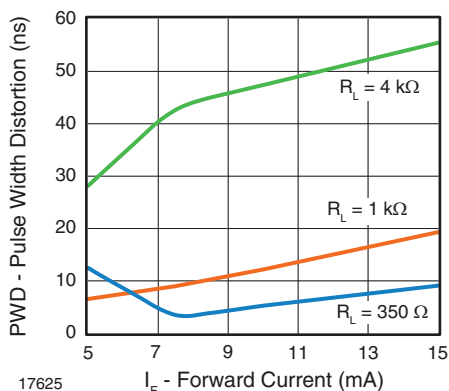


Fig. 24 - Pulse Width Distortion vs. Forward Current

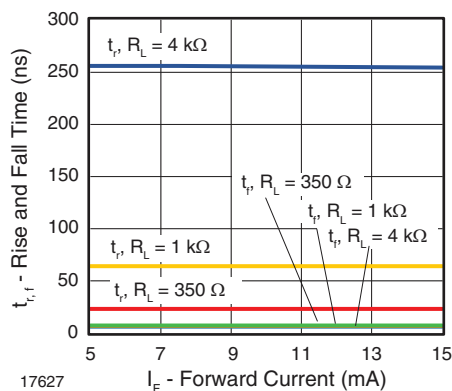


Fig. 26 - Rise and Fall Time vs. Forward Current

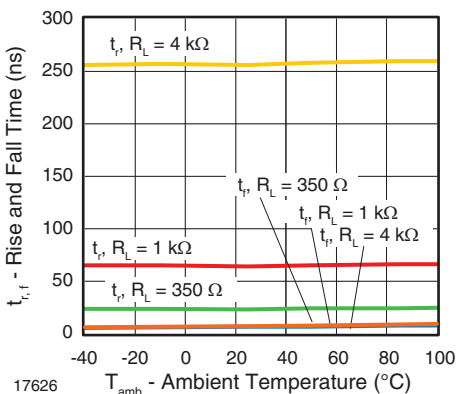


Fig. 25 - Rise and Fall Time vs. Ambient Temperature


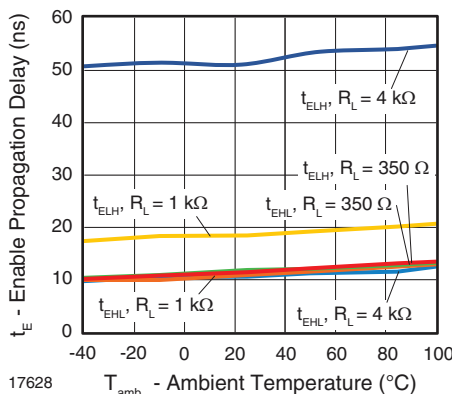


Fig. 27 - Enable Propagation Delay vs. Ambient Temperature




**PACKAGE DIMENSIONS** (in millimeters)

**DIP-8**

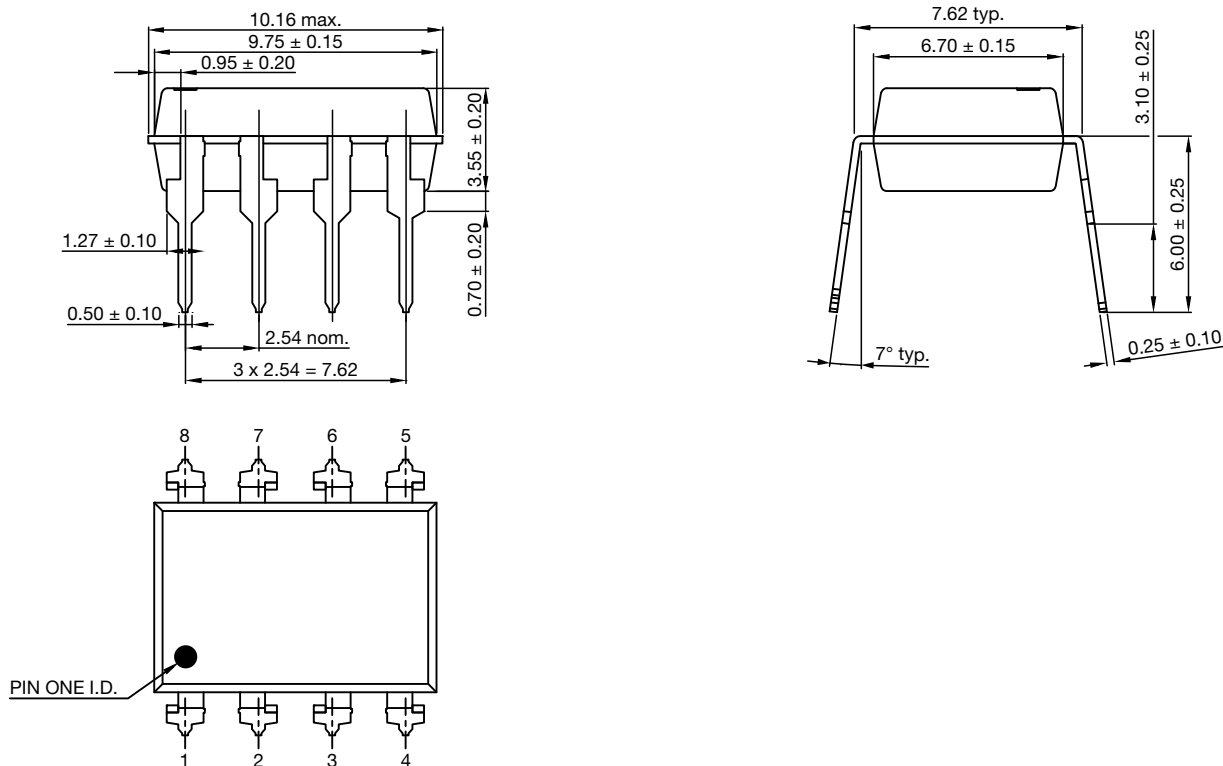


**DIP-8, 400 mil (option 6)**

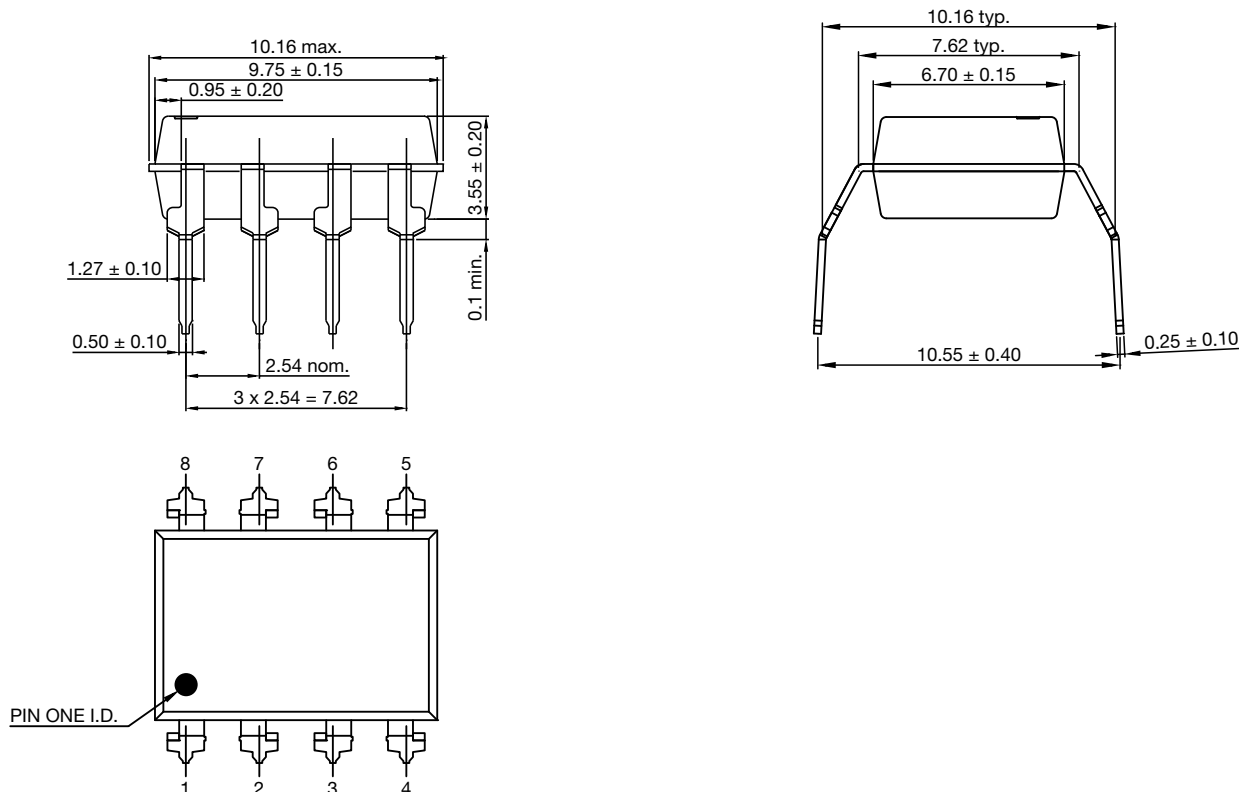




## SMD-8 (option 7)

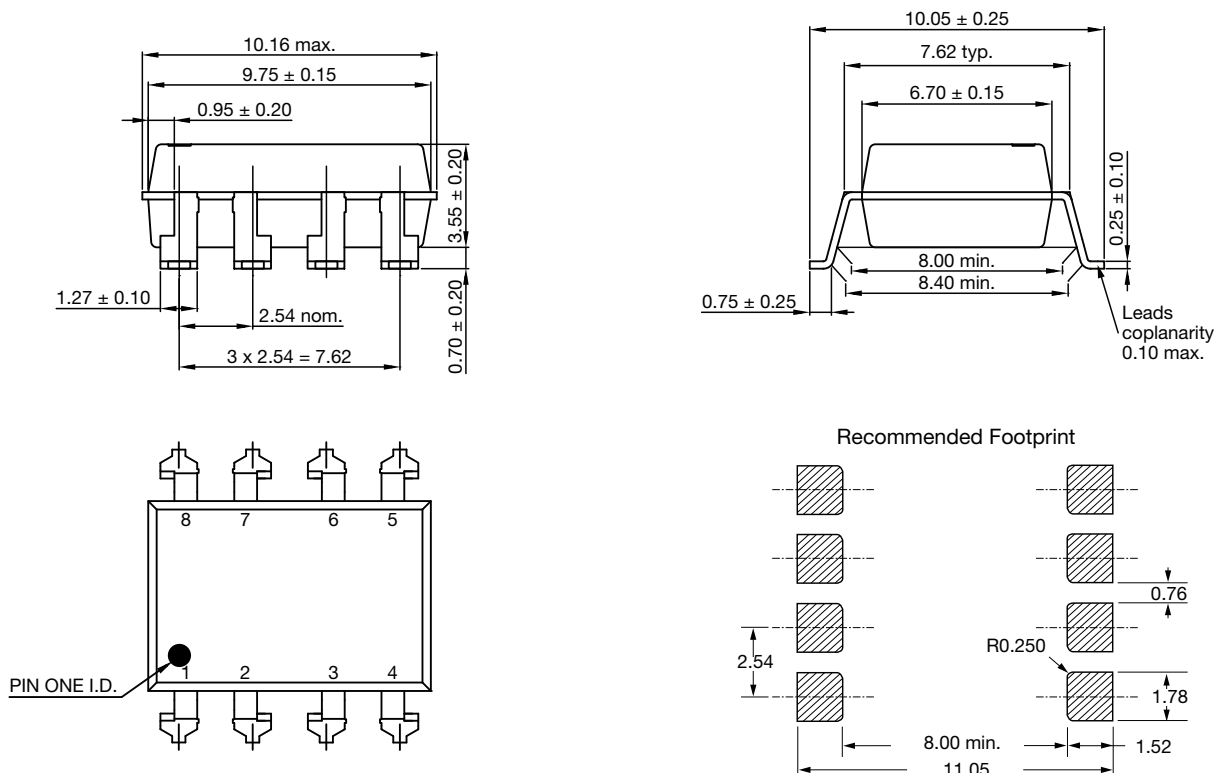

## SMD-8 (option 9)

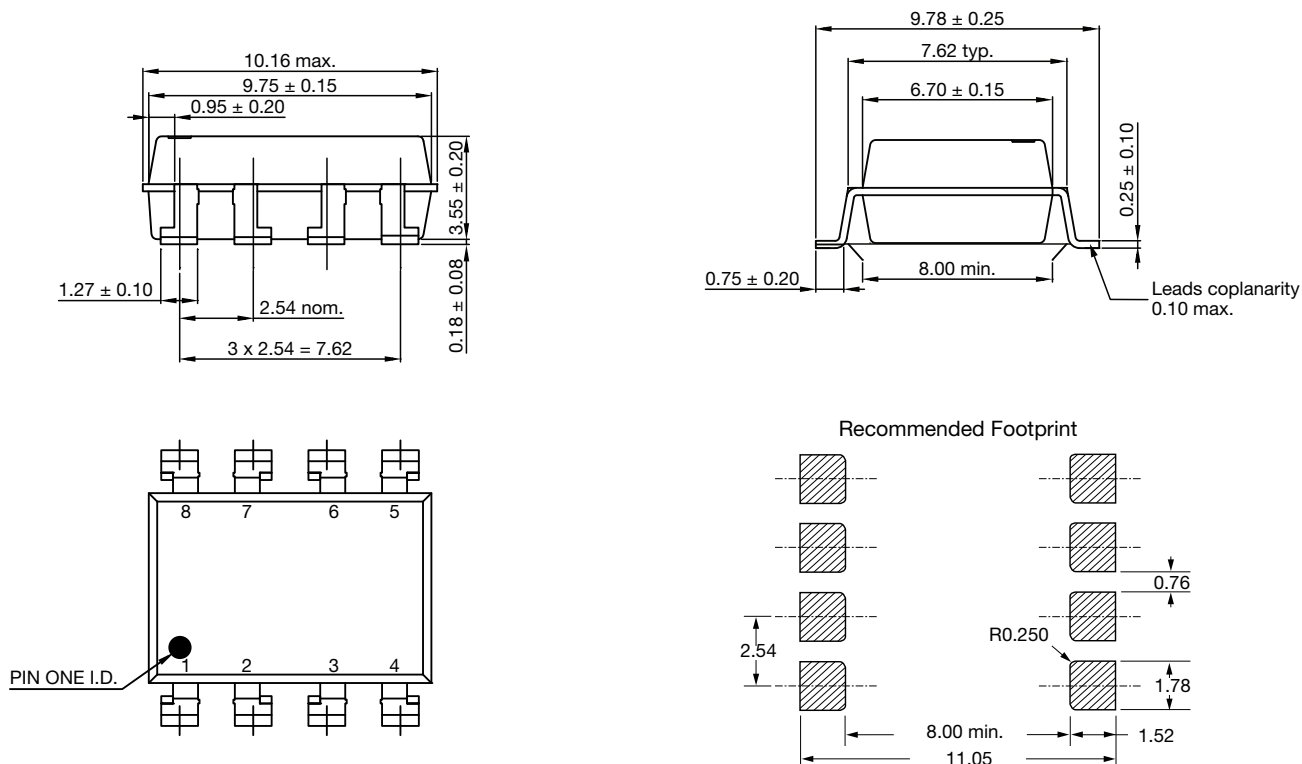



## PACKAGE MARKING




Fig. 28 - Example of VO2611-X017T

### Notes

- XXXX = LMC (lot marking code)
- VDE logo is only marked on option 1 parts
- Tape and reel suffix (T) is not part of the package marking

## PACKING INFORMATION (in millimeters)

### Tube



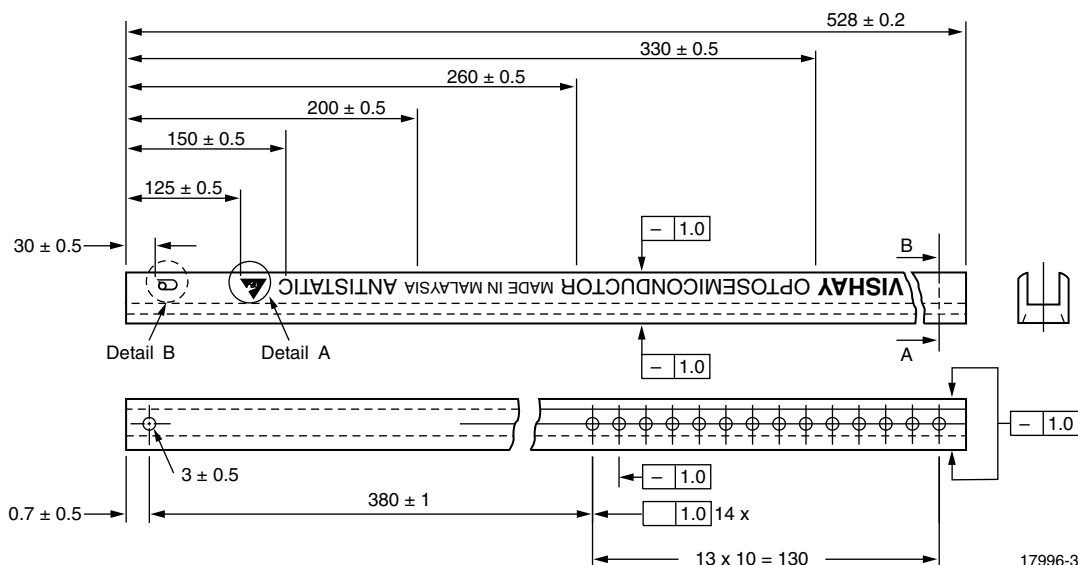


Fig. 29 - Shipping Tube Specifications for DIP-8 Packages

| DEVICES PER TUBS |            |           |           |
|------------------|------------|-----------|-----------|
| TYPE             | UNITS/TUBE | TUBES/BOX | UNITS/BOX |
| DIP-8            | 50         | 40        | 2000      |

### DIP-8

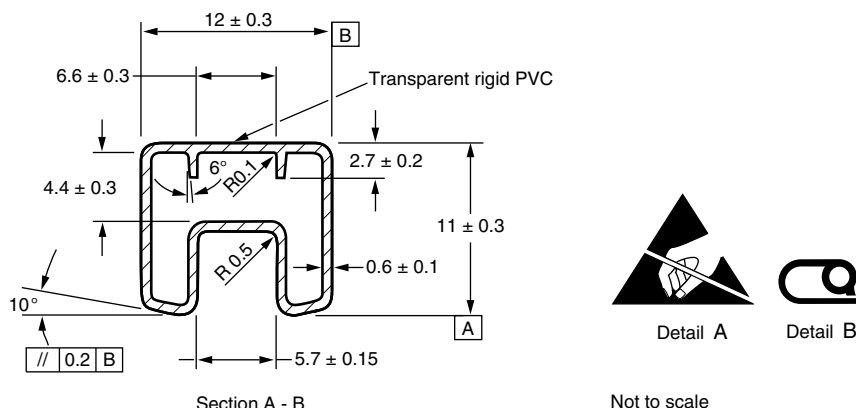

Not to scale

17996-4

Fig. 30 - Tube Shipping Medium

Technical drawing of a stopper pin. The drawing shows a side view of the pin, which has a central shaft with a conical tip and two side flanges. Dimensions are indicated in millimeters:

- Top flange width: 9
- Top flange height: 0.5
- Side flange height: 5.7
- Side flange width: 4.3
- Bottom flange width: 15.3
- Bottom flange height: 13.6
- Overall length: 15912

With stopper pins  
tolerance:  $\pm 0.5$   
length:  $575 \pm 5$

Diagram illustrating the components of a film strip:

- Top cover tape
- Embossed carrier
- Embossment

17998

Diagram illustrating the internal components of a 35mm film canister:

- ESD sticker**: A small rectangular label at the top.
- Tape slot in core**: A slot in the central core where the film is wound.
- Regular, special or bar code label**: A larger label at the bottom, which can be a regular label, a special label, or a bar code label.

The overall height of the canister is indicated as **330 (13")**.

Technical drawing of a rectangular component with dimensions and tolerances. The drawing includes a side view on the left and a top view on the right. The side view shows a thickness of 0.35 (0.014) and a total width of 4.7 (0.185). The top view shows a length of 13.3 (0.523) and a width of 0.1 (0.004) max. The top view also shows three circular features with diameters of 1.5 (0.059) min. and 1.75 ± 0.1 (0.069 ± 0.004). The distance between the centers of the first two circular features is 10.41 (0.410). The distance between the center of the first circular feature and the center of the first rectangular feature is 10.21 (0.402). The distance between the centers of the first and second rectangular features is 12.0 (0.472). The distance between the center of the second rectangular feature and the center of the third rectangular feature is 16.0 ± 0.3 (0.630 ± 0.012). The distance between the center of the third rectangular feature and the right edge is 7.5 ± 0.05 (0.295 ± 0.002). The distance between the center of the first circular feature and the right edge is 4 ± 0.1 (1.57 ± 0.004). The distance between the center of the second circular feature and the right edge is 2 ± 0.05 (0.079 ± 0.002). The distance between the center of the third circular feature and the right edge is 10 pitch cumulative tolerance on tape ± 0.2 (0.008). The drawing also shows a top cover tape, a pin 1 and top of component, an embossment, and center lines of cavity. The direction of feed is indicated by an arrow pointing to the right.

18008

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT [www.vishay.com/doc?91000](http://www.vishay.com/doc?91000)

## SMD-8 (option 9)

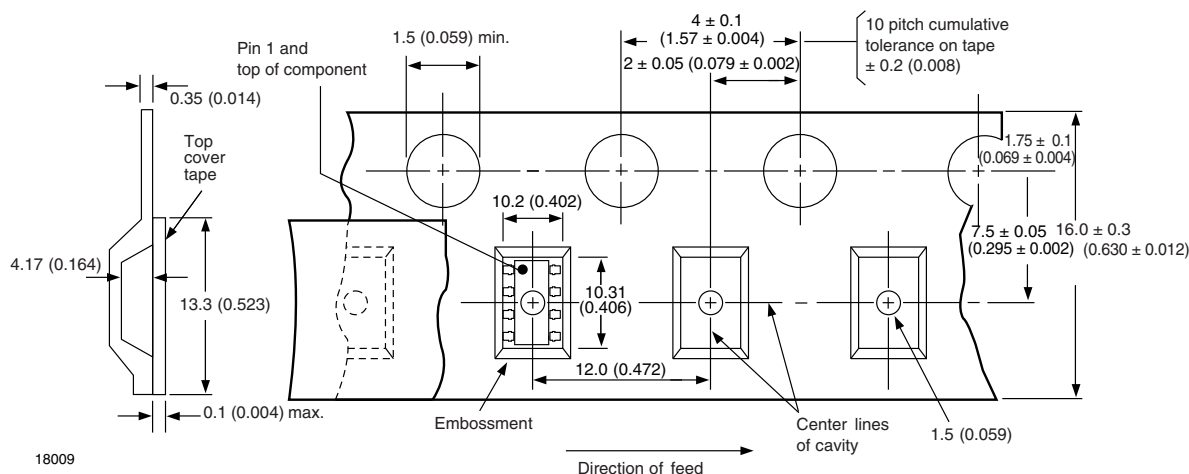


Fig. 35 - Tape and Reel Shipping Medium

## SOLDER PROFILES

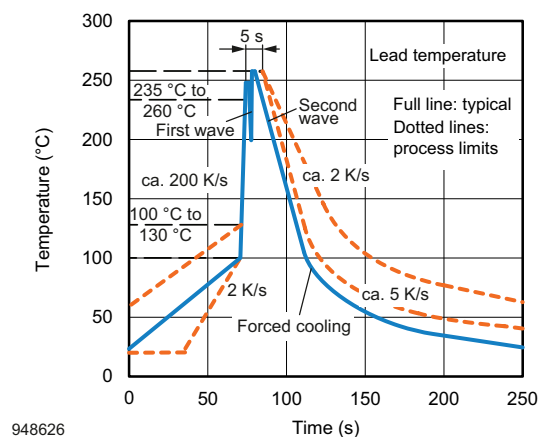


Fig. 36 - Wave Soldering Double Wave Profile According to J-STD-020 for DIP Devices

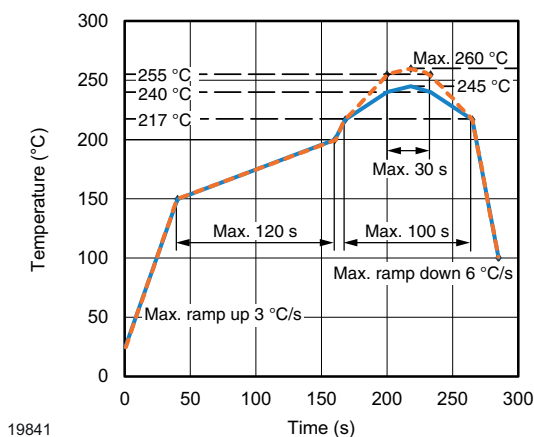


Fig. 37 - Lead (Pb)-free Reflow Solder Profile According to J-STD-020 for SMD Devices

## HANDLING AND STORAGE CONDITIONS

ESD level: HBM class 2

Floor life: unlimited

Conditions:  $T_{amb} < 30\text{ °C}$ , RH < 85 %

Moisture sensitivity level 1, according to J-STD-020



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.