


Fusible Carbon Film MELF Resistors



FEATURES

- Fusible resistor for constant voltage designed for overload protection
- Special trimming to provide the fusing characteristic
- Flame retardant coating
- Pure tin termination on nickel barrier, plated on press fit steel caps
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



TECHNICAL SPECIFICATIONS	
DESCRIPTION	LCM0207SI
DIN size	0207
Metric size code	RC6123M
Resistance range	1 Ω to 9.1 Ω
Resistance tolerance	$\pm 5\%$
Temperature coefficient	+300 ppm/K / -250 ppm/K
Rated dissipation, P_{70} ⁽¹⁾	0.250 W
Operating voltage, U_{max} . AC _{RMS} /DC	$\sqrt{P \times R}$
Permissible film temperature, $\theta_{F max}$. ⁽¹⁾	125 °C
Operating temperature range ⁽¹⁾	-55 °C to 125 °C
Permissible voltage against ambient (insulation): 1 min; U_{ins}	500 V
Minimum overload to fuse	4 W
Time to fuse	≤ 15 s
Failure rate: FIT _{observed}	$\leq 1 \times 10^{-9}$ /h

Note

⁽¹⁾ Please refer to APPLICATION INFORMATION below.

APPLICATION INFORMATION

When the resistor dissipates power, a temperature rise above the ambient temperature occurs, dependent on the thermal resistance of the assembled resistor together with the printed circuit board. The rated dissipation applies only if the permitted film temperature is not exceeded.

These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.



TEMPERATURE COEFFICIENT AND RESISTANCE RANGE				
TYPE / SIZE	TCR	TOLERANCE	RESISTANCE	E-SERIES
LCM0207SI	+300 ppm/K / -250 ppm/K	± 5 %	1 Ω to 9.1 Ω	E24

PACKAGING						
TYPE / SIZE	CODE	QUANTITY	PACKAGING STYLE	WIDTH	PITCH	PACKAGING DIMENSIONS
LCM0207SI	BP	1500	Antistatic blister tape acc. IEC 60286-3, Type 2a	12 mm	4 mm	Ø 180 mm/7"
	BS	7500				Ø 330 mm/13"

PART NUMBER AND PRODUCT DESCRIPTION

Part Number: LCM0207B01008JB00

L	C	M	0	2	0	7	B	0	1	0	0	8	J	B	P	0	0
TYPE / SIZE		VERSION		TCR		RESISTANCE		TOLERANCE		PACKAGING							
LCM0207		B = SI; fusible		0 = neutral See datasheet for TC value		3 digit value 1 digit multiplier Multiplier 8 = *10 ⁻²		J = ± 5 %		BP BS							

Product Description: LCM0207SI 1R0 5 % BP


LCM0207SI	1R0	5 %	BP
TYPE / SIZE	RESISTANCE	TOLERANCE	PACKAGING
LCM0207SI	1R0 = 1 Ω	± 5 %	BP BS

Note


- Products can be ordered using either the PART NUMBER or the PRODUCT DESCRIPTION.




FUNCTIONAL PERFORMANCE

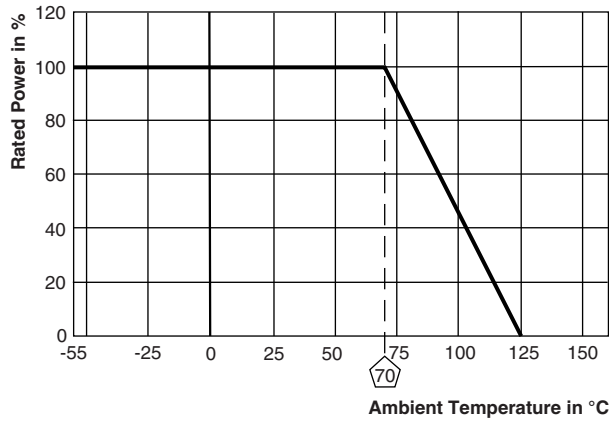

Derating

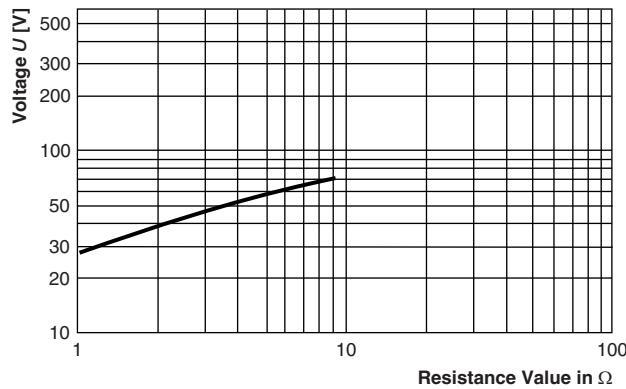

$U_{max.}$ at and after Fusing and max. Pulse Voltage

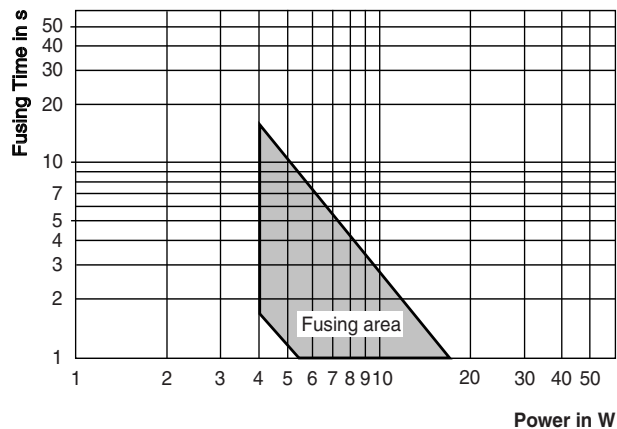


Fusing Performance



TEST PROCEDURES AND REQUIREMENTS				
EN 60115-1 CLAUSE	IEC 60068-2 ⁽¹⁾ TEST METHOD	TEST	PROCEDURE	REQUIREMENTS PERMISSIBLE CHANGE (ΔR)
			Stability for product types:	
			LCM0207SI	1 Ω to 9.1 Ω
4.5	-	Resistance	-	$\pm 5\% R$
4.8	-	Temperature coefficient	At (20 / -55 / 20) °C and (20 / 125 / 20) °C	+300 ppm/K / -250 ppm/K
4.25.1	-	Endurance at 70 °C	$U = \sqrt{P_{70} \times R}$; 1.5 h on; 0.5 h off; 70 °C; 1000 h	$\pm 2\% R$
4.25.3	-	Endurance at upper category temperature	125 °C; 1000 h	$\pm 2\% R$
4.24	78 (Cab)	Damp heat, steady state	(40 \pm 2) °C; 56 days; (93 \pm 3) % RH	$\pm 2\% R$
4.19	14 (Na)	Rapid change of temperature	30 min at LCT; 30 min at UCT; LCT = -55 °C; UCT = 125 °C; 5 cycles	$\pm 0.5\% R$
4.18	58 (Td)	Resistance to soldering heat	Solder bath method; (260 \pm 5) °C; (10 \pm 1) s	$\pm 0.25\% R$

Note


⁽¹⁾ The quoted IEC standards are also released as EN standards with the same number and identical contents.

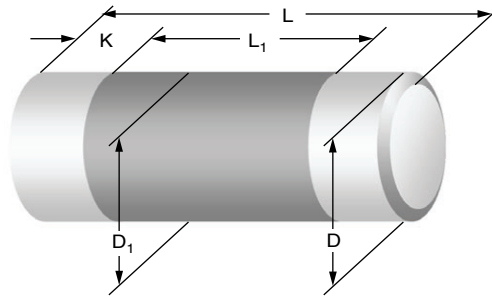DIMENSIONS


DIMENSIONS AND MASS						
TYPE / SIZE	L (mm)	D_{MAX} (mm)	L_1 MIN. (mm)	D_1 (mm)	K (mm)	MASS (mg)
LCM0207SI	$5.8 + 0/- 0.3$	2.2	2.6	$D + 0/- 0.2$	1.25 ± 0.2	77

Note

- Color code marking is applied according to IEC 60062 ⁽¹⁾ in four bands. Each color band appears as a single solid line, voids are permissible if at least 2/3 of the band is visible from each radial angle of view. The last color band for tolerance is approximately 50 % wider than the other bands. An additional 5th yellow band identifies the special fusible type.

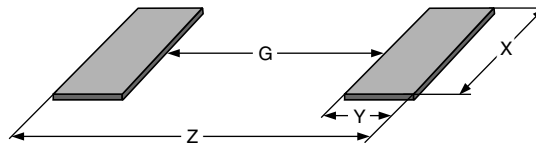PATTERN STYLES FOR MELF RESISTORS


RECOMMENDED SOLDER PAD DIMENSIONS								
TYPE / SIZE	WAVE SOLDERING				REFLOW SOLDERING			
	G (mm)	Y (mm)	X (mm)	Z (mm)	G (mm)	Y (mm)	X (mm)	Z (mm)
LCM0207SI	-	-	-	-	2.6	2.0	2.4	6.6

Notes

- The given solder pad dimensions reflect the considerations for board design and assembly as outlined e.g. in standards IEC 61188-5-x ⁽¹⁾, or in publication IPC-7351.
- ⁽¹⁾ The quoted IEC standards are also released as EN standards with the same number and identical contents.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.