



## Custom Capabilities Aluminum Electrolytic Capacitors



### CAPABILITIES

The aluminum electrolytic capacitor division can offer almost everything you need. In this document you'll find a few examples.


- Vibration resistivity
- Customized marking / sleeving
- Customized packing
- Keyed-polarity
- Special lead styles
- 4 pin and 6 pin SMD's
- Capacitor modules (integration of capacitor banks on carrier)

### CONTACT INFORMATION

For design assistance, contact: [aluminumcaps@vishay.com](mailto:aluminumcaps@vishay.com)

We will display our custom capabilities per form.

### RADIAL

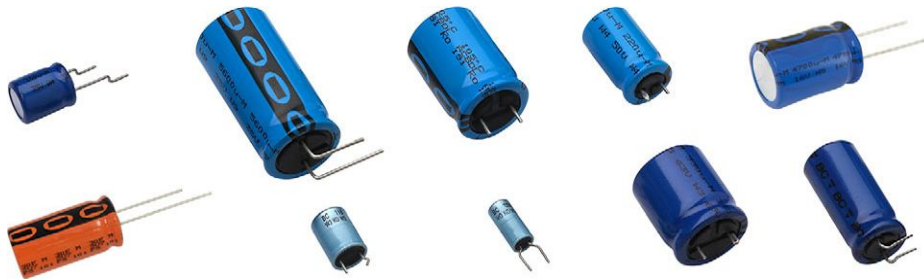

For our radial products we can offer special lead styles (J-, L-, Z-, V-, T-lead). The J-lead for example can be used for inverse-polarity protection. Next to that we do offer 3-pin radials. The benefit of 3-pins is that you do not need any additional fixation and the parts can handle a higher vibration compared to conventional 2-pin solutions.

For the special lead styles we can offer customized tray packs and box packaging. This to prevent that the leads will bend during transport.

High vibration proofed versions with special case design are available in separate series (vibration proofed up to 50 g).





## AXIAL




For our axial products we can offer the special lead styles and customized packaging as well.

Next to that we can offer our axial products with the classic mounting ring as well:



## SCREW TERMINAL

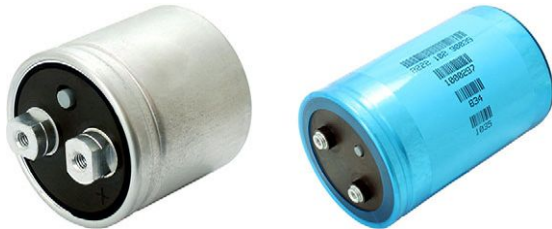

For our screw terminal products customization is daily business. Due to the value of the parts most of our customers ask for solutions which fit 1:1 into their design.

A few examples are:

- non-standard capacity / voltage combinations
- longer life time products
- non-standard case sizes (in case you have a maximum diameter / length in your application)
- different treads / terminals (like M5-13 mm, M6-18 mm, or ¼-28 UNF US tread)
- bar code labeling
- your own logo / text on the sleeve of the product
- keyed polarity terminals (inverse-polarity protection)

## SMD



For our SMD products we offer 4-pin and 6-pin SMD baseplates: no additional gluing necessary; higher vibration resistance compared to conventional 2-pin solutions; sizes up to 18 mm x 21 mm possible.

High vibration proofed versions with special case design are available in separate series (vibration proofed up to 30 g).

## SNAP-IN



For our snap-in products we can offer non-standard capacity / voltage combinations in the case size of your need. Next to that we can offer customized marking or sleeves. We offer next to the standard 2-pin also 3-pin and 4-pin parts.

One of the solutions we offer is a returnable stick packing for automatic insertion:





## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.