

## Surface Mount Multilayer Ceramic Chip Capacitors for Ultra Small Commodity Applications



### FEATURES

- High capacitance in unit size
- High precision dimensional tolerances
- Suitably used in high-accuracy automatic mounting machine
- Dry sheet manufacturing technology
- Base Metal Electrode system (BME)
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**  
**GREEN**  
(5-2008)

### APPLICATIONS

- Miniature microwave module
- Portable equipment - mobile phone, PDA

| ELECTRICAL SPECIFICATIONS               |  |   |  |
|---|--|---|--|
| Size                                    | 0201   |   |  |
| Dielectric                              | COG (NP0)  | X7R   | X5R  |
| Capacitance                             | 0.5 pF to 120 pF   | 100 pF to 10 nF   | 100 pF to 2.2 $\mu$ F                                |
| Capacitance Tolerance <sup>(2)(3)</sup> | Cap. $\leq$ 5 pF: B ( $\pm$ 0.1 pF), C ( $\pm$ 0.25 pF)<br>5 pF < Cap. < 10 pF: C ( $\pm$ 0.25 pF), D ( $\pm$ 0.5 pF)<br>Cap. $\geq$ 10 pF: F ( $\pm$ 1 %), G (2 %), J (5 %) | J ( $\pm$ 5 %)<br>K ( $\pm$ 10 %)<br>M ( $\pm$ 20 %)                    | J ( $\pm$ 5 %)<br>K ( $\pm$ 10 %)<br>M ( $\pm$ 20 %) |
| Rated Voltage ( $V_{DC}$ )              | 16 V, 25 V, 50 V   | 10 V, 16 V, 25 V, 50 V  | 6.3 V, 10 V, 16 V, 25 V, 50 V                        |
| $\tan \delta/Q$ <sup>(1)</sup>          | Cap. < 30 pF, $Q \geq 400 + 20 C$<br>Cap. $\geq$ 30 pF, $Q \geq 1000$  | See Table 1   |  |
| Insulation Resistance at $U_R$          | $\geq 10 G\Omega$  | $\geq 10 G\Omega$ or $R \times C \geq 500 \Omega F$ , whichever is less |  |
| Operating Temperature                   | -55 °C to +125 °C  |   | -55 °C to +85 °C                                     |
| Capacitance Change                      | $\pm 30$ ppm   | $\pm 15$ %  |  |
| Termination                             | Ni/Sn lead (Pb)-free termination   |   |  |

#### Notes

- (1) Measured at 30 % to 70 % relative humidity  
NP0: apply 1.0  $V_{RMS} \pm 0.2 V_{RMS}$ , 1.0 MHz  $\pm 10$  % at the condition of 25 °C ambient temperature  
X7R, X5R: apply 1.0  $V_{RMS} \pm 0.2 V_{RMS}$ , 1.0 kHz  $\pm 10$  % (224 / 6.3 V - 224 / 10 V - 105 / 10 V - 225 / 6.3 V: 0.5  $V_{RMS} \pm 0.2 V_{RMS}$ , 1.0 kHz  $\pm 10$  %) at the condition of 25 °C ambient temperature
- (2) Preconditioning for X7R / X5R MLCC: perform a heat treatment at 150 °C  $\pm 10$  °C for 1 h, then leave in ambient condition for 24 h  $\pm 2$  h before measurement
- (3) Tolerances restriction see "Selection Chart"

**Table 1**

X7R / X5R:

| RATED VOLTAGE | D.F. $\leq$ | EXCEPTION OF D.F. $\leq$ |                           |
|---------------|-------------|--------------------------|---------------------------|
| 50 V          | 3 %         | -                        | -                         |
| 16 V / 25 V   | 3.5 %       | 5 %                      | 0201 $\geq$ 0.01 $\mu$ F  |
|               |             | 10 %                     | 0201 $\geq$ 0.1 $\mu$ F   |
| 10 V          | 5 %         | 10 %                     | 0201 $\geq$ 0.012 $\mu$ F |
|               |             | 15 %                     | 0201 $\geq$ 0.1 $\mu$ F   |
| 6.3 V         | 10 %        | 15 %                     | 0201 $\geq$ 0.1 $\mu$ F   |

| QUICK REFERENCE DATA |      |                     |             |             |
|----------------------|------|---------------------|-------------|-------------|
| DIELECTRIC           | CASE | MAXIMUM VOLTAGE (V) | CAPACITANCE |             |
|                      |      |                     | MINIMUM     | MAXIMUM     |
| C0G (NP0)            | 0201 | 50                  | 0.5 pF      | 120 pF      |
| X5R                  | 0201 | 50                  | 100 pF      | 2.2 $\mu$ F |
| X7R                  | 0201 | 50                  | 100 pF      | 10 nF       |

**Note**

- Detail ratings see "Selection Chart" table

| ORDERING INFORMATION |                                     |   |   |                                   |   |                          |                                  |
|----------------------|-------------------------------------|---|---|-----------------------------------|---|--------------------------|----------------------------------|
| VJ0201               | A                                   | 100   | J   | X                                 | X   | C                        | W1BC                             |
| SIZE CODE            | DIELECTRIC                          | CAPACITANCE   | TOLERANCE <sup>(1)</sup>  | TERMINATION                       | RATED VOLTAGE   | PACKAGING                | PROCESS CODE FOR BASIC COMMODITY |
| 0201                 | A = C0G (NP0)<br>G = X5R<br>Y = X7R | Two significant digits followed by the number of zeros.<br>R is in place of decimal point:<br>0R5 = 0.5 pF<br>1R0 = 1.0 pF<br>100 = 10 pF | B = $\pm$ 0.10 pF<br>C = $\pm$ 0.25 pF<br>D = $\pm$ 0.5 pF<br>F = $\pm$ 1 %<br>G = $\pm$ 2 %<br>J = $\pm$ 5 %<br>K = $\pm$ 10 %<br>M = $\pm$ 20 % | X = Ni barrier<br>100 % matte tin | Y = 6.3 V<br>Q = 10 V<br>J = 16 V<br>X = 25 V<br>A = 50 V | C = 7" reel / paper tape |                                  |

**Note**

- <sup>(1)</sup> Detail tolerance see under "Electrical Specifications" table

| DIMENSIONS in inches (millimeters) |  |  |                                 |   |
|------------------------------------|--|--|---------------------------------|---|
|                                    |  |  |                                 |   |
| SIZE CODE                          | L  | W  | T MAX.                          | MB  |
| 0201 <sup>(1)</sup><br>(0603)      | 0.024 $\pm$ 0.0012<br>(0.60 $\pm$ 0.03)                | 0.012 $\pm$ 0.0012<br>(0.30 $\pm$ 0.03)                | 0.013<br>(0.33)                 | 0.006 $\pm$ 0.002<br>(0.15 $\pm$ 0.05)                          |
|                                    | 0.024 $\pm$ 0.002 <sup>(2)</sup><br>(0.60 $\pm$ 0.05)  | 0.012 $\pm$ 0.002 <sup>(2)</sup><br>(0.30 $\pm$ 0.05)  | 0.014 <sup>(2)</sup><br>(0.35)  |   |
|                                    | 0.024 $\pm$ 0.0035 <sup>(3)</sup><br>(0.60 $\pm$ 0.09) | 0.012 $\pm$ 0.0035 <sup>(3)</sup><br>(0.30 $\pm$ 0.09) | 0.0153 <sup>(3)</sup><br>(0.39) | 0.006 + 0.004 / - 0.002 <sup>(3)</sup><br>(0.15 + 0.1 / - 0.05) |

**Notes**

- <sup>(1)</sup> Reflow soldering only  
<sup>(2)</sup> For capacitance values 0.1  $\mu$ F < cap. < 0.68  $\mu$ F  
<sup>(3)</sup> For capacitance values  $\geq$  0.68  $\mu$ F



| SELECTION CHART         |          |           |      |      |                     |                  |                  |                  |      |      |      |      |      |
|-------------------------|----------|-----------|------|------|---------------------|------------------|------------------|------------------|------|------|------|------|------|
| DIELECTRIC              |          | COG (NP0) |      |      |                     | X5R              |                  |                  |      | X7R  |      |      |      |
| STYLE                   |          | VJ0201    |      |      |                     |                  |                  |                  |      |      |      |      |      |
| SIZE CODE               |          | 0201      |      |      |                     |                  |                  |                  |      |      |      |      |      |
| VOLTAGE V <sub>DC</sub> |          | 16 V      | 25 V | 50 V | 6.3 V               | 10 V             | 16 V             | 25 V             | 50 V | 10 V | 16 V | 25 V | 50 V |
| VOLTAGE CODE            |          | J         | X    | A    | Y                   | Q                | J                | X                | A    | Q    | J    | X    | A    |
| CAP. CODE               | CAP.     |           |      |      |                     |                  |                  |                  |      |      |      |      |      |
| 0R5                     | 0.5 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 1R0                     | 1.0 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 1R2                     | 1.2 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 1R5                     | 1.5 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 1R8                     | 1.8 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 2R2                     | 2.2 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 2R7                     | 2.7 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 3R3                     | 3.3 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 3R9                     | 3.9 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 4R7                     | 4.7 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 5R6                     | 5.6 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 6R8                     | 6.8 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 8R2                     | 8.2 pF   |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 100                     | 10 pF    |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 120                     | 12 pF    |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 150                     | 15 pF    |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 180                     | 18 pF    |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 220                     | 22 pF    |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 270                     | 27 pF    |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 330                     | 33 pF    |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 390                     | 39 pF    |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 470                     | 47 pF    |           | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 560                     | 56 pF    | L         | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 680                     | 68 pF    | L         | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 820                     | 82 pF    | L         | L    | L    |                     |                  |                  |                  |      |      |      |      |      |
| 101                     | 100 pF   | L         | L    | L    |                     |                  |                  |                  | L    |      | L    | L    | L    |
| 121                     | 120 pF   | L         | L    | L    |                     |                  |                  |                  | L    |      | L    | L    | L    |
| 151                     | 150 pF   |           |      |      |                     |                  |                  |                  | L    |      | L    | L    | L    |
| 181                     | 180 pF   |           |      |      |                     |                  |                  |                  | L    |      | L    | L    | L    |
| 221                     | 220 pF   |           |      |      |                     |                  |                  |                  | L    |      | L    | L    | L    |
| 271                     | 270 pF   |           |      |      |                     |                  |                  |                  | L    |      | L    | L    | L    |
| 331                     | 330 pF   |           |      |      |                     |                  |                  |                  | L    |      | L    | L    | L    |
| 391                     | 390 pF   |           |      |      |                     |                  |                  |                  | L    |      | L    | L    | L    |
| 471                     | 470 pF   |           |      |      |                     |                  |                  |                  | L    |      | L    | L    | L    |
| 561                     | 560 pF   |           |      |      |                     |                  |                  |                  | L    |      | L    | L    | L    |
| 681                     | 680 pF   |           |      |      |                     |                  |                  |                  | L    |      | L    | L    | L    |
| 821                     | 820 pF   |           |      |      |                     |                  |                  |                  | L    |      | L    | L    | L    |
| 102                     | 1000 pF  |           |      |      |                     |                  | L                |                  | L    |      | L    | L    | L    |
| 152                     | 1500 pF  |           |      |      |                     | L                | L                |                  | L    |      | L    |      |      |
| 222                     | 2200 pF  |           |      |      |                     | L                | L                |                  | L    |      | L    |      |      |
| 332                     | 3300 pF  |           |      |      |                     | L                | L                |                  | L    |      | L    |      |      |
| 472                     | 4700 pF  |           |      |      |                     | L                | L                |                  | L    |      | L    |      |      |
| 682                     | 6800 pF  |           |      |      |                     | L                | L                |                  | L    |      | L    |      |      |
| 103                     | 0.010 μF |           |      |      |                     | L                | L <sup>(3)</sup> |                  | L    |      | L    |      |      |
| 153                     | 0.015 μF |           |      |      | L                   |                  |                  |                  |      |      |      |      |      |
| 223                     | 0.022 μF |           |      |      | L                   |                  |                  |                  |      |      |      |      |      |
| 333                     | 0.033 μF |           |      |      | L                   |                  |                  |                  |      |      |      |      |      |
| 473                     | 0.047 μF |           |      |      | L                   |                  |                  |                  |      |      |      |      |      |
| 683                     | 0.068 μF |           |      |      | L                   |                  |                  |                  |      |      |      |      |      |
| 104                     | 0.10 μF  |           |      |      | L                   | L                | L <sup>(3)</sup> | L <sup>(3)</sup> |      |      |      |      |      |
| 224                     | 0.22 μF  |           |      |      | L <sup>(3)</sup>    | L <sup>(3)</sup> |                  |                  |      |      |      |      |      |
| 474                     | 0.47 μF  |           |      |      | L <sup>(3)</sup>    |                  |                  |                  |      |      |      |      |      |
| 105                     | 1.0 μF   |           |      |      | L <sup>(3)</sup>    | L <sup>(1)</sup> |                  |                  |      |      |      |      |      |
| 225                     | 2.2 μF   |           |      |      | L <sup>(1)(4)</sup> |                  |                  |                  |      |      |      |      |      |


Notes

- Letters indicate product thickness, see "Packaging quantities"
- (1) Only in 20 % (code "M") tolerance
- (2) Only in 10 % (code "K") tolerance
- (3) Not in 5 % (code "J") tolerance
- (4) Contact [mlcc@vishay.com](mailto:mlcc@vishay.com) for availability



| PACKAGING QUANTITIES     |                   |             |              |
|--------------------------|-------------------|-------------|--------------|
| SIZE CODE<br>(inch / mm) | THICKNESS<br>(mm) | PAPER TAPE  |              |
|                          |                   | 7" REEL (C) | 13" REEL (P) |
| 0201 (0603)              | 0.39              | 15K         | -            |

**PAPER TAPE SPECIFICATIONS**

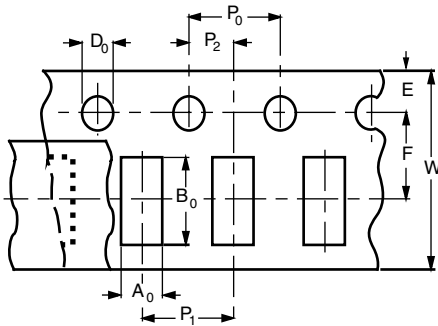


**DIMENSIONS OF PAPER TAPE**

in millimeters

| SYMBOL         | PRODUCT SIZE CODE |
|----------------|-------------------|
|                | 0201              |
| A <sub>0</sub> | 0.38 ± 0.05       |
| B <sub>0</sub> | 0.68 ± 0.05       |
| W              | 8.00 ± 0.10       |
| E              | 1.75 ± 0.05       |
| F              | 3.50 ± 0.05       |
| D <sub>0</sub> | 1.55 ± 0.05       |
| P <sub>0</sub> | 4.00 ± 0.10       |
| P <sub>1</sub> | 2.00 ± 0.05       |
| P <sub>2</sub> | 2.00 ± 0.05       |

**REEL SPECIFICATION**

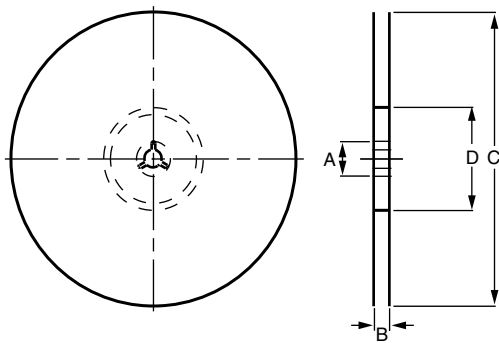


**REEL DIMENSIONS AND TAPE WIDTH**

in millimeters

| SYMBOL | Ø 180 mm; 7" | Ø 330 mm; 13" |
|--------|--------------|---------------|
| A      | 13.0 ± 0.5   | 13.0 ± 0.5    |
| B      | 9.0 ± 1.0    | 9.0 ± 1.0     |
| C      | 178.0 ± 1.0  | 330.0 ± 1.0   |
| D      | 60.0 ± 1.0   | 100.0 ± 1.0   |

| CONSTRUCTION |                  |                          |                          |
|--------------|------------------|--------------------------|--------------------------|
| NO.          | NAME             | COG (NP0)                | X5R, X7R                 |
| 1            | Ceramic material | CaZrO <sub>3</sub> based | BaTiO <sub>3</sub> based |
| 2            | Inner electrode  | Ni                       |                          |
| 3            | Termination      | Inner layer              | Cu                       |
| 4            |                  | Middle layer             | Ni                       |
| 5            |                  | Outer layer              | Sn (matt)                |

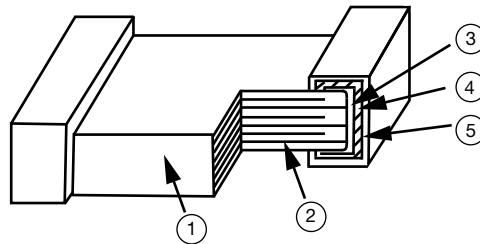

## STORAGE AND HANDLING CONDITIONS

- (1) To store products at 5 °C to 40 °C ambient temperature and 20 % to 70 % relative humidity conditions.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

### Cautions:

- a. Do not store products in a corrosive environment such as sulfide, chloride gas, or acid. It may cause oxidization of electrode, which easily be resulted in poor soldering.
- b. To store products on the shelf and avoid exposure to moisture.
- c. Do not expose products to excessive shock, vibration, direct sunlight and so on.



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.