

Wirewound Resistors, Commercial Power, Current Sense, Low Value



FEATURES

- Open air design
- Complete welded construction
- Low temperature coefficient
- Extremely low resistance values
- Low inductance
- AEC-Q200 qualified available ⁽¹⁾
- Material categorization:
for definitions of compliance please see
www.vishay.com/doc?99912



Notes

* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant.

Please see the information / tables in this datasheet for details

⁽¹⁾ Flame retardance test may not be applicable to some resistor technologies

STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	POWER RATING $P_{70^{\circ}\text{C}}$ W	RESISTANCE VALUE ⁽¹⁾ Ω	TOLERANCE $\pm \%$	WEIGHT (typical) g
CP0002...13	1	0.005 to 0.03	1, 5	0.2

Note

⁽¹⁾ Other values available, contact factory

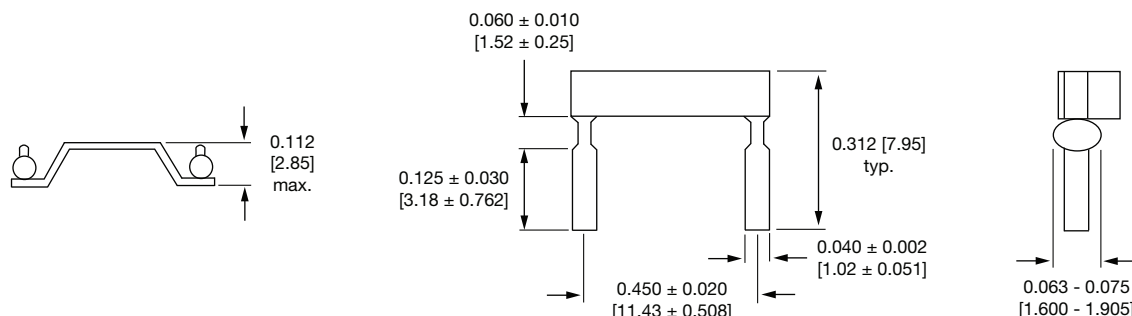
TECHNICAL SPECIFICATIONS

PARAMETER	UNIT	CP0002...13
Temperature Coefficient	ppm/°C	Element = ± 25 ; Component = ± 140
Operating Temperature	°C	-55 to +275

GLOBAL PART NUMBER INFORMATION

Global Part Numbering Example: CP00026L800FE5113

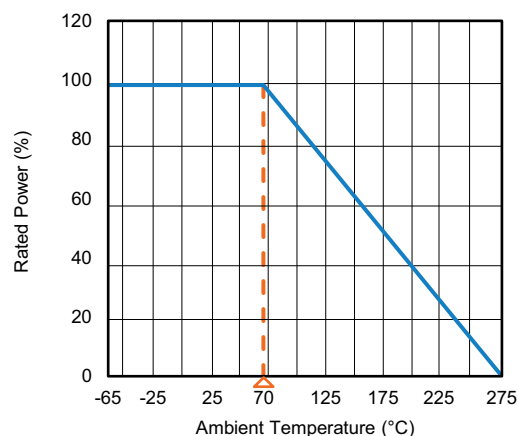
C	P	0	0	0	2	6	L	8	0	0	F	E	5	1	1	3	
GLOBAL MODEL CP0002						VALUE L = m Ω (below 0.01 Ω) R = decimal 5L000 = 0.005 Ω R0100 = 0.01 Ω			TOLERANCE CODE F = $\pm 1.0 \%$ J = $\pm 5.0 \%$			PACKAGING E51 = lead (Pb)-free, bulk S51 = tin / lead, bulk			SPECIAL 13		

DIMENSIONS in inches [millimeters]

MECHANICAL SPECIFICATIONS

Terminal Strength: 10 pounds minimum

Construction: a completely welded assembly using a premium quality copper-nickel element and tinned copper terminals.

Packaging: layered bulk packaging, 2000 pcs/bag sealed

DERATING

PERFORMANCE

TEST	CONDITIONS OF TEST	TEST LIMITS
Thermal Shock	-55 °C to +150 °C, 1000 cycles, 15 min at each extreme	± (0.5 % + 0.0005 Ω) ΔR
Short Time Overload	5 x rated power for 5 s	± (0.5 % + 0.0005 Ω) ΔR
Low Temperature Operation	-65 °C for 24 h	± (0.5 % + 0.0005 Ω) ΔR
High Temperature Exposure	1000 h at +170 °C	± (1.0 % + 0.0005 Ω) ΔR
Bias Humidity	+85 °C, 85 % RH, 10 % bias, 1000 h	± (0.5 % + 0.0005 Ω) ΔR
Mechanical Shock	100 g's for 6 ms, 5 pulses	± (0.5 % + 0.0005 Ω) ΔR
Vibration	Frequency varied 10 Hz to 2000 Hz in 1 min, 3 directions, 12 h	± (0.5 % + 0.0005 Ω) ΔR
Load Life	1000 h at rated power, +70 °C, 1.5 h "ON", 0.5 h "OFF"	± (1.0 % + 0.0005 Ω) ΔR
Resistance to Solder Heat	+260 °C solder, 10 s to 12 s dwell, 25 mm/s emergence	± (0.5 % + 0.0005 Ω) ΔR
Moisture Resistance	MIL-STD-202, method 106, 0 % power, 7a and 7b not required	± (0.5 % + 0.0005 Ω) ΔR



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.