





# THERMAWICK® THERMAL MANAGEMENT ELECTRICALLY ISOLATED THERMAL CONDUCTOR


Example THJP1206 Thermal Jumper Showing 36 % Surface Temperature Reduction

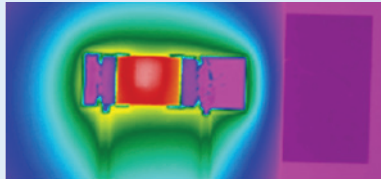

Ceramic Resistor Chip Without Thermal Jumper (149.8 °C)

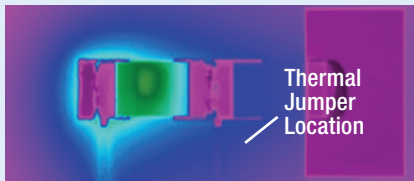

Ceramic Chip Resistor With Thermal Jumper (95.5 °C)

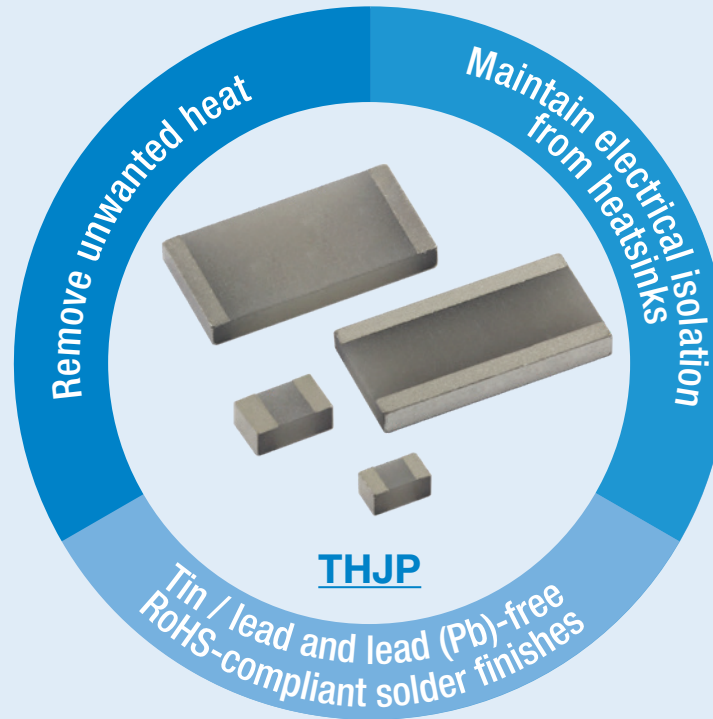

## FEATURES

- Thin film surface-mount terminations
- High thermal conductivity
- High electrical insulation
- Low capacitance
- Long axis designs standard
- Custom sizes available

## APPLICATIONS

- Power supplies and converters
- RF amplifiers
- Synthesizers
- Switch mode power supplies
- Pin and laser diodes



## BENEFITS

THERMAL CONDUCTIVITY



170 W/mK

ELECTRICAL ISOLATION



> 999 MΩ


CAPACITANCE



0.26 pF

CASE SIZE	0603	0612	0805	1206	1225	2512
Thermal Resistance (°C/W)	14	4	13	15	4	15
Thermal Conductance (mW/°C)	70	259	77	65	259	65
Capacitance (pF)	0.07	0.26	0.15	0.07	0.26	0.07
Dielectric Withstanding Voltage $kV_{AC}$ , RMS (60 Hz)	> 1.5	> 1.5	> 1.5	> 1.5	> 1.5	> 1.5

## TYPICAL APPLICATION

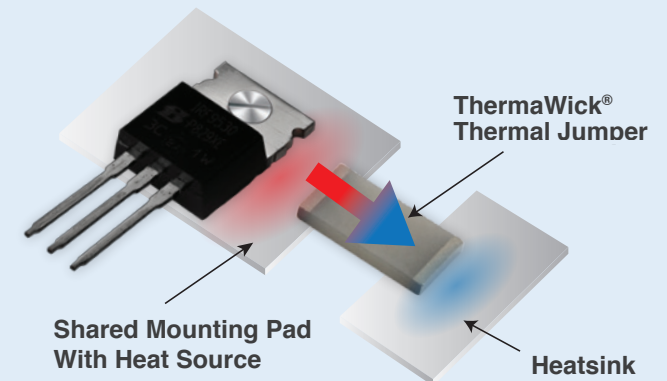

[thinfilm@vishay.com](mailto:thinfilm@vishay.com)