


Side View Holder:


D = 18.95 mm, H = 22.6 mm, W = 7.4 mm, X = 19 mm


FEATURES

- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912




AVAILABLE FOR

- Mold



LINKS TO ADDITIONAL RESOURCES


NAME	LENS AXIS (X)	VIEW	TYPE	HEIGHT (H)	WIDTH (W)	DEPTH (D)
AY1	19	Side	Holder	22.6	7.4	18.95


MECHANICAL DIMENSIONS in millimeters

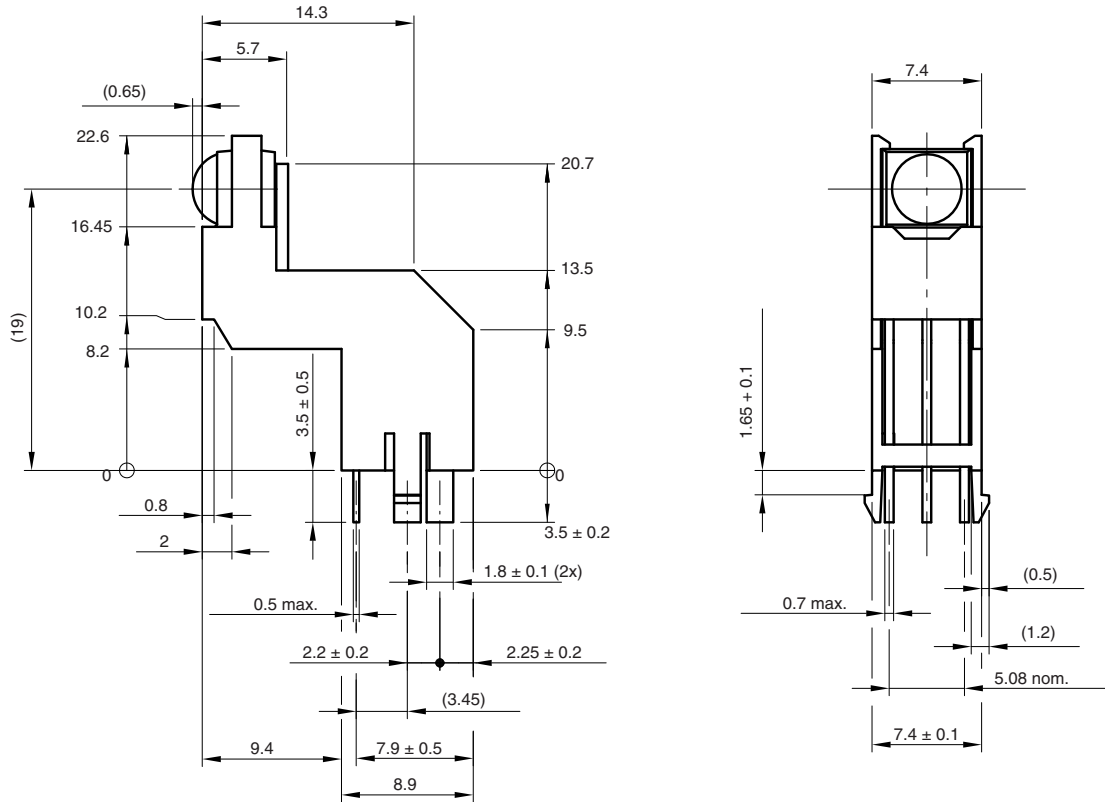


Proposed hole layout from component side (for reference)



Not indicated tolerances ± 0.3




technical drawings according to DIN specifications

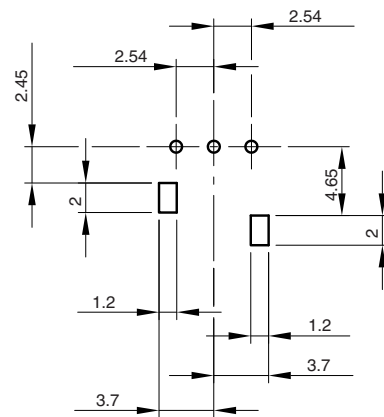


Drawing-No.: 6.550-5255.01-4
Issue: 3; 04.08.09
18166


PACKAGING DIMENSIONS in millimeters

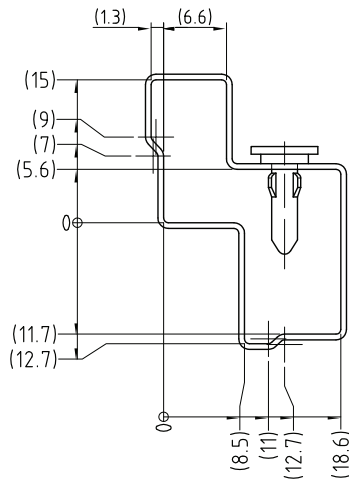

Wanddicke/wall thickness: 0.6
Bohrungen durchgehend
holes on both sides

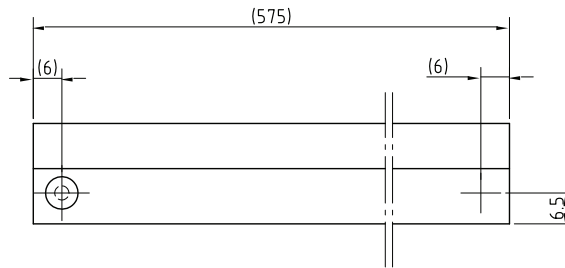

1:1



Druck / Printing for tubes
1.400-5548.0-3 Version 1

Drawing-No.: 9.700-5282.0-4
Rev. 2; Date: 20.11.03

20272-1

ORDERING INFORMATION

T S O P

d d d

d d

A Y 1

Product series
(2 or 3 digits)

Frequency

Holder type


Note

- d = "digit", please consult the list of available series on the previous page to create a valid part number

Example: TSOP14438AY1

PACKING QUANTITY

- 75 pieces per tube
- 18 tubes per carton

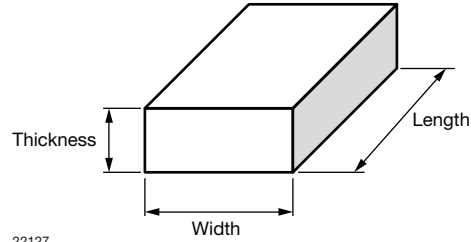OUTER PACKAGING
CARTON BOX DIMENSIONS in millimeters


KINDS OF CARTON BOX	THICKNESS	WIDTH	LENGTH
Packaging plastic tubes (normal / auxiliary devices)	80	150	600
Packaging plastic trays (devices with metal holders)	120	290	490
Tape and reel box (taping in reels)	400	310	410
Ammo-box (zigzag taping)	50	130	350

Vishay offers plastic and metal holder which have different characteristics:

- *Plastic Pros: nearly invisible behind the bezel*
- *Plastic Cons: cannot be reflow soldered, wave soldering deforms the hooks (visual issue only, the part is secured by the leads after soldering)*
- *Metal Pros: may be reflow and wave soldered, improves EMI and RF rejection*
- *Metal Cons: appears shiny behind the bezel, will oxidize over time (visual issue only, the holder functionality is not impaired)*