




Case Outline for TO-263 7L Package

FACILITY CODE: 9

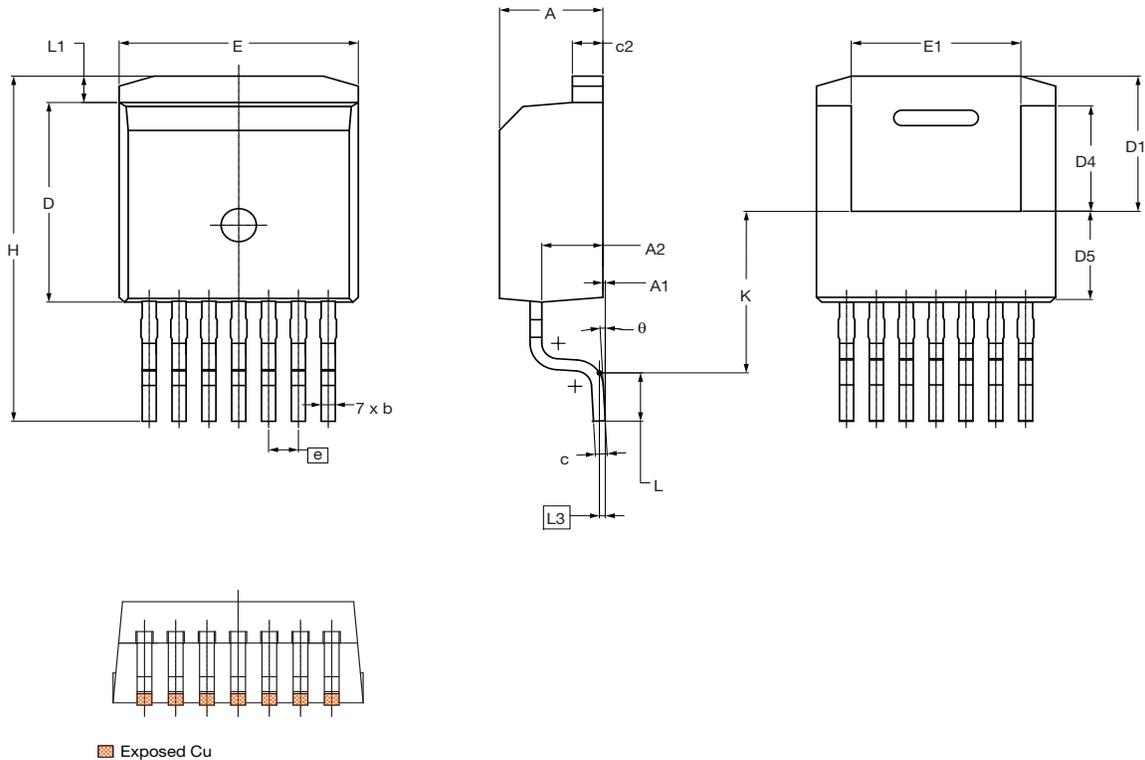

DIM.	MILLIMETERS		
	MIN.	NOM.	MAX.
A	4.30	4.40	4.50
A1	0.00	0.10	0.25
A2	2.45	2.60	2.75
b	0.50	0.60	0.70
c	0.45	0.50	0.60
c2	1.20	1.30	1.40
D	8.93	9.08	9.23
D1	6.15 ref.		
D4	4.65	4.80	4.95
D5	3.83	4.13	4.43
E	10.08	10.18	10.28
E1	6.82	7.22	7.62
e	1.27 BSC.		
H	15.00	15.70	16.00
K	7.30		
L	1.90	2.20	2.50
L1	1.00	1.20	1.40
L3	0.25 BSC.		
θ	0 °	3 °	7 °

ECN: E24-0552-Rev. B, 28-Oct-2024
DWG: 6119

Notes

- All dimensions are in mm and angles are in degrees
- Dimension D and E do not include mold flash. These Dimensions are measured at the outermost extreme of the plastic body
- Thermal pad contour optional within Dimensions E, L1, D4 and E1
- Dimension D4 and E1 establish a minimum mounting surface for the thermal pad
- There is exposed Cu and molding flash bleeding at the pin which is close to package