

# VEMI85AB-HGK

**Vishay Semiconductors** 

# 8-Channel EMI-Filter with ESD-Protection



www.vishay.com



### MARKING (example only)



click logo to get started

Dot = pin 1 marking Y = type code (see table below) XX = date code

#### **DESIGN SUPPORT TOOLS**



ORDERING INFORMATION					
DEVICE NAME	DEVICE NAME ORDERING CODE		MINIMUM ORDER QUANTITY		
VEMI85AB-HGK	VEMI85AB-HGK-GS08	3000	15 000		

PACKAGE DATA						
DEVICE NAME	PACKAGE NAME	TYPE CODE	WEIGHT	MOLDING COMPOUND FLAMMABILITY RATING	MOISTURE SENSITIVITY LEVEL	SOLDERING CONDITIONS
VEMI85AB-HGK	LLP3313-17L	9U	7.4 mg	UL 94 V-0	MSL level 1 (according J-STD-020)	Peak temperature max. 260 °C

ABSOLUTE MAXIMUM RATINGS						
PARAMETER	TEST CONDITIONS	SYMBOL	VALUE	UNIT		
Peak pulse current	All I/O pin to pin 17; acc. IEC 61000-4-5; $t_p = 8/20 \ \mu s$ ; single shot	I <sub>PPM</sub>	4	А		
ESD immunity	Contact discharge acc. IEC 61000-4-2; 10 pulses	V <sub>ESD</sub>	± 18	kV		
	Air discharge acc. IEC 61000-4-2; 10 pulses	VESD	± 25	κv		
Operating temperature	Junction temperature	TJ	-40 to +125	°C		
Storage temperature		T <sub>STG</sub>	-55 to +150	۵°		


Rev. 1.6, 09-Jan-2019

1 For technical questions, contact: <u>EMIfilter@vishay.com</u>




RoHS COMPLIANT HALOGEN FREE GREEN (5-2008)

- e4 precious metal (e.g. Ag, Au, NiPd, NiPdAu) (no Sn)
- Material categorization: for definitions of compliance please see <u>www.vishay.com/doc?99912</u>



- 8-channel EMI-filter
- Low leakage current
- Line resistance  $R_S = 100 \Omega$
- Typical cut off frequency  $f_{3dB} = 130 \text{ MHz}$
- ESD-protection acc. IEC 61000-4-2

± 18 kV contact discharge ± 25 kV air discharge







### **APPLICATION NOTE**

With the VEMI85AB-HGK 8 different signal or data lines can be filtered and clamped to ground. Due to the different clamping levels in forward and reverse direction the clamping behaviour is <u>Bi</u>directional and <u>Asymmetric</u> (BiAs).

L1 <sub>IN</sub>	L1 <sub>OUT</sub>
L2 <sub>IN</sub>	L2 <sub>OUT</sub>
L3 <sub>IN</sub>	L3 <sub>OUT</sub>
L4 <sub>IN</sub>	L4 <sub>OUT</sub>
L5 <sub>IN</sub>	L5 <sub>OUT</sub>
L6 <sub>IN</sub>	L6 <sub>OUT</sub>
L7 <sub>IN</sub>	L7 <sub>OUT</sub>
L8 <sub>IN</sub>	L8 <sub>OUT</sub>
Ground	






20389

The 8 independent EMI-filter are placed between

pin 1 and pin 16, pin 2 and pin 15, pin 3 and pin 14, pin 4 and pin 13, pin 5 and pin 12, pin 6 and pin 11, pin 7 and pin 10 and pin 8 and pin 9.

They all are connected to a common ground pin 17 on the backside of the package.

The circuit diagram of one EMI-filter-channel shows two identical Z-diodes at the input to ground and the output to ground. These Z-diodes are characterized by the breakthrough voltage level ( $V_{BR}$ ) and the diode capacitance ( $C_D$ ). Below the breakthrough voltage level the Z-diodes can be considered as capacitors. Together with these capacitors and the line resistance  $R_S$  between input and output the device works as a low pass filter. Low frequency signals (f < f<sub>3dB</sub>) pass the filter while high frequency signals (f > f<sub>3dB</sub>) will be shorted to ground through the diode capacitances  $C_D$ .

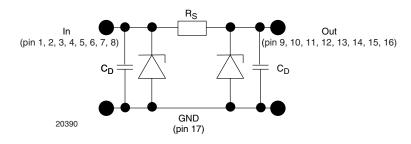



Each filter is symmetrical so that both ports can be used as input or output.



PARAMETER	TEST CONDITIONS/REMARKS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Protection paths	Number of channels which can be protected	N <sub>channel</sub>	-	-	8	channel
Reverse stand off voltage	Max. reverse working voltage	V <sub>RWM</sub>	-	-	5	V
Reverse voltage	at I <sub>R</sub> = 1 μA	V <sub>R</sub>	5	-	-	V
Reverse current	at $V_R = V_{RWM}$	I <sub>R</sub>	-	0.25	1	μA
Reverse break down voltage	at I <sub>R</sub> = 1 mA	V <sub>BR</sub>	6	6.8	-	V
Pos. clamping voltage	at $I_{PP} = 1$ A applied at the input, measured at the output; acc. IEC 61000-4-5	V <sub>C-out</sub>	-	-	7	V
	at $I_{PP} = I_{PPM} = 4$ A applied at the input, measured at the output; acc. IEC 61000-4-5	V <sub>C-out</sub>	-	-	8	V
Neg. clamping voltage	at $I_{PP}$ = -1 A applied at the input, measured at the output; acc. IEC 61000-4-5	V <sub>C-out</sub>	-1.4	-	-	V
	at $I_{PP} = I_{PPM} = -4$ A applied at the input, measured at the output; acc. IEC 61000-4-5	V <sub>C-out</sub>	-1.6	-	-	V
Input capacitance	at $V_R = 0 V$ ; f = 1 MHz	C <sub>IN</sub>	-	40	45	pF
	at V <sub>R</sub> = 2.5 V; f = 1 MHz	C <sub>IN</sub>	-	24	28	pF
ESD-clamping voltage	at ± 18 kV ESD-pulse acc. IEC 61000-4-2	V <sub>CESD</sub>	-	7.5	-	V
Line resistance	Measured between input and output; $I_S = 10 \text{ mA}$	R <sub>S</sub>	90	100	110	Ω
Cut-off frequency	$V_{IN} = 0 V$ ; measured in a 50 $\Omega$ system	f <sub>3dB</sub>	-	130	-	MHz

### TYPICAL CHARACTERISTICS (T<sub>amb</sub> = 25 °C, unless otherwise specified)









Fig. 2 - 8/20 µs Peak Pulse Current Wave Form acc. IEC 61000-4-5



www.vishay.com

Fig. 3 - Typical Forward Current I<sub>F</sub> vs. Forward Voltage V<sub>F</sub>




Fig. 4 - Typical Reverse Voltage  $V_R$  vs. Reverse Current  $I_R$ 




Fig. 5 - Typical Peak Clamping Voltage V\_C vs. Peak Pulse Current  $I_{PP}$ 




Fig. 6 - Typical Input Capacitance CIN vs. Input Voltage VIN




Fig. 7 - Typical Small Signal Transmission (S21) at  $Z_O$  = 50  $\Omega$ 


Rev. 1.6, 09-Jan-2019

4

For technical questions, contact: <u>EMIfilter@vishay.com</u> THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <u>www.vishay.com/doc?91000</u>



### PACKAGE DIMENSIONS in millimeters (inches): LLP3313-17L

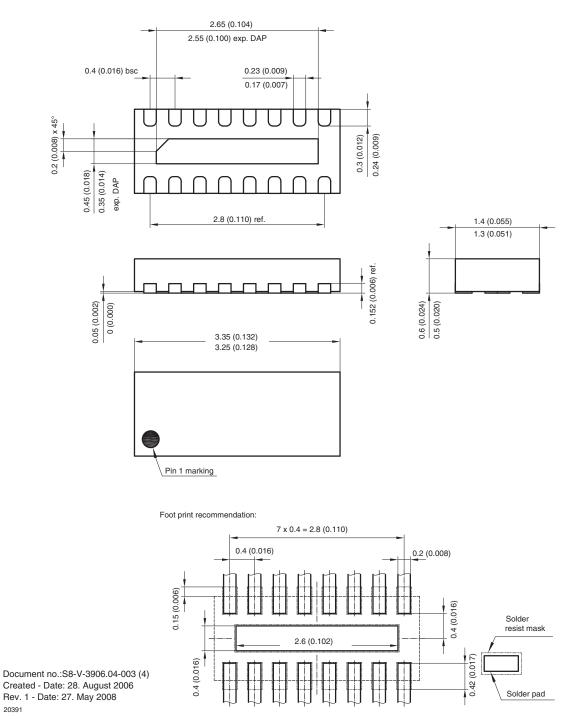

5

For technical questions, contact: <u>EMIfilter@vishay.com</u> THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <u>www.vishay.com/doc?91000</u>



Vishay

# Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2024 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

Revision: 01-Jan-2024