

Plasma Panel Display Modules

16 Character Display with Drive Electronics and Controller



The APD-016M040 has two modes of operation, parallel or serial input. The parallel interface consists of a 6 bit data bus plus 3 hand-shaking and 3 control lines. New characters are entered from right to left by presenting the appropriate 6 bit code to the data bus and latching it into memory with a DATA PRESENT pulse. A WRITE CYCLE output signal is provided during the time in which data can be written to the display, and a DATA TAKEN pulse occurs after data has been accepted, or when BACK SPACE occurs. BACK SPACE allows the displayed message to be shifted to the right, recalling the last character shifted off the left end of the display. Up to 16 characters may be recalled, after which blanks are entered in the left position of the display. The display may be cleared at any time by bringing the CLEAR line low. A BLANK DISABLE line is provided to blank the display without altering the refresh memory contents.

The serial interface is RS-232-C compatible and has 3 selectable baud rates (300, 1200, 9600). This mode assumes 1 start bit, 8 data bits, 1 stop bit, no parity and half duplex. No handshaking is provided. Mode settings and baud rates are selected as follows. (Both lines are internally pulled to Vcc with 6.8 kilohm pull-up resistors.)

SS0	SS1	BAUD RATE
0	0	300
0	1	1200
1	0	9600
1	1	Parallel

FEATURES

- 16 (1 x 16) alphanumeric characters (5 x 7 dot matrix).
- Bezel and filter included.
- Parallel and serial interfaces.
- High brightness.
- Wide viewing angle (150°).
- Low input voltage.
- Compact size.
- Enhanced replacement for Burroughs SSD1000-0061 (optionally-0041).

PIN DESCRIPTION

PIN	DESCRIPTION	PIN	DESCRIPTION
1	DATA BIT 5	A	DATA BIT 4
2	DATA BIT 3	B	DATA BIT 2
3	DATA BIT 1	C	DATA BIT 0
4	N/C	D	DATA PRESENT
5	CLEAR	E	BACK SPACE
6	SPEED SELECT 1	F	DATA TAKEN
7	WRITE CYCLE	H	RECEIVED DATA
8	BLANK DISABLE	J	+ 5 V
9	SPEED SELECT 0	K	N/C
10	N/C	L	GND

Keyway between pins 4 (D) and 5 (E).

OPTICAL SPECIFICATIONS

Viewing Area: 0.40" [10.2mm] W x 6.69" [169.9mm] L.

Number of Characters: 16.

Character Size: 0.28" [7.1mm] W x 0.40" [10.2mm] H.

Pixel Size: 0.036" [0.914mm] diameter.

Pixel Pitch: 0.061" [1.55mm].

Character Spacing: 2 blank columns between successive characters - 0.147" [3.73mm].

Luminance: 80 foot lamberts.

STANDARD ELECTRICAL SPECIFICATIONS


	SYMBOL	MIN.	TYP.	MAX.	UNITS
Supply Voltage	VCC	4.75	5	5.25	V
Supply Current (1)	ICC	—	1.25	1.75	A
Logic One Voltage	VIH	2	—	—	V
Logic 0 Voltage	VIL	—	—	0.8	V

*Vcc is the input to a DC-DC converter.

There may be peak in rush currents higher than shown.



DIMENSIONS in inches [millimeters]

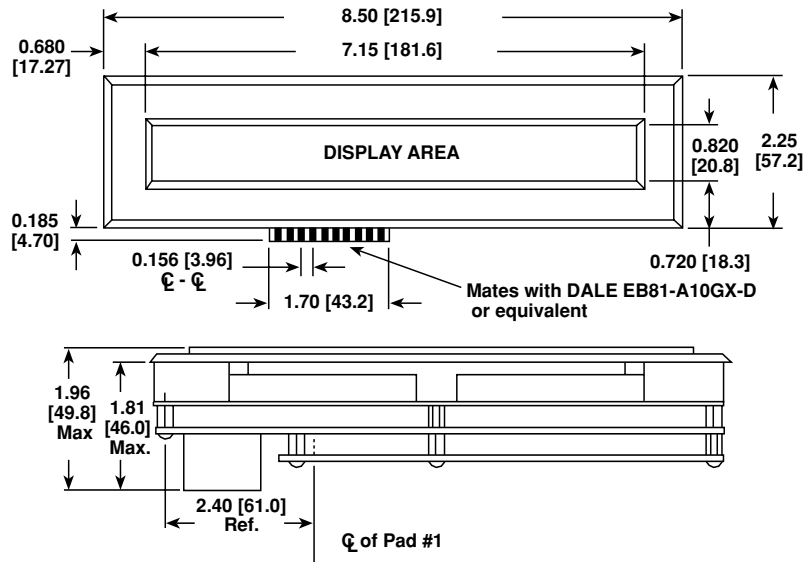

ORDERING INFORMATION

DESCRIPTION

PART NO.

Display and Electronics (includes Bezel) (Equivalent to Burroughs SSD1000-0061)	APD-016M040
Display and Electronics (includes Bezel) Data Entry is Left to Right (Equivalent to Burroughs SSD1000-0041)	APD-016M040-1
Mating Connector	280498-01



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.