

### Mounting Instructions

#### PRINCIPLES OF OPERATION


The left-hand numeral of the Model 15 Multidial indicates the total number of revolutions of the drive sleeve (component shaft) that have been completed. The center numeral and right numeral indicate tenths and hundredths of a revolution, respectively. The graduations between the numerals on the right digit wheel can be read to one five-hundredth of a revolution of the drive sleeve.

Example: If the reading in the window displays 652, the reading is 6 turns plus 52 % of the seventh turn. Use of the graduations can further subdivide the reading at this setting.

#### MOUNTING INSTRUCTIONS

The following instructions apply when the Model 15 is panel-mounted in conjunction with Spectrol 500 or 800 series potentiometers or other rotary components:

1. Provide a hole in the panel for the non-turn lug on the rear of the dial. The preferred dimensions are shown in the mounting hole pattern outline overleaf.
2. Mount the potentiometer or component to the panel.
3. Prepare the Model 15 Multidial for mounting by:
  - a. Rotating the dial to the desired reading.
  - b. Locking the brake.
  - c. Removing the spring-detented knob with a straight pull to expose the mounting set screws.
4. Place the dial over the component shaft and engage the non-turn lug into the hole provided in step 1.
5. Rotate the exposed component shaft to phase the component output to the preselected dial reading.
6. Tighten the set screws against the component shaft, replace the spring-detented knob, and release the brake.
7. The dial is now ready to operate.

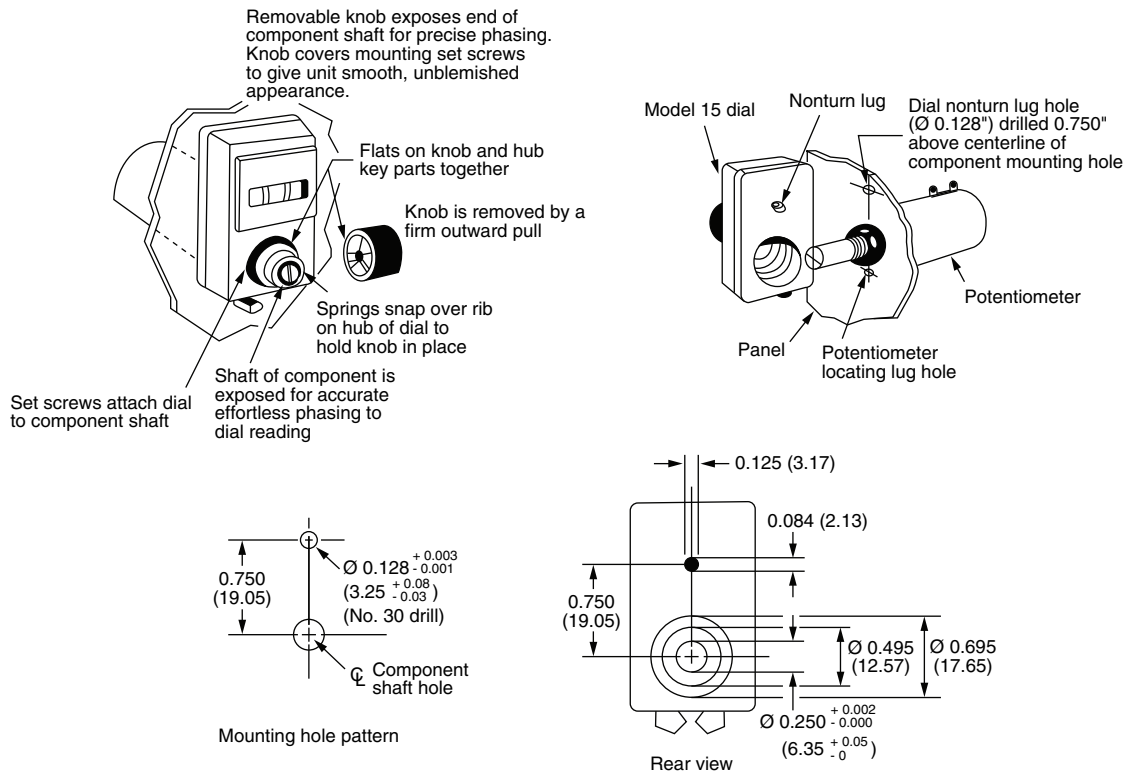

Dimensions in inches (millimeters)



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**