


www.vishay.com

Vishay Siliconix

Automotive P-Channel 30 V (D-S) 175 °C MOSFET

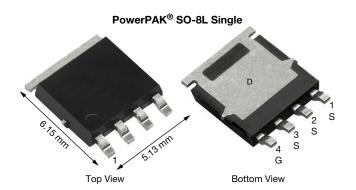

PRODUCT SUMMARY	
V _{DS} (V)	-30
$R_{DS(on)}$ (Ω) at $V_{GS} = -10 \text{ V}$	0.0081
$R_{DS(on)}(\Omega)$ at $V_{GS} = -4.5 \text{ V}$	0.0170
I _D (A)	-75
Configuration	Single


FEATURES

- TrenchFET® power MOSFET
- 100 % R_g and UIS tested
- AEC-Q101 qualified ^c
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912





ROHS COMPLIANT HALOGEN FREE



P-Channel MOSFET

ORDERING INFORMATION	
Package	PowerPAK SO-8L
Lead (Pb)-free and halogen-free	SQJ433EP (for detailed order number please see www.vishay.com/doc?79771)

ABSOLUTE MAXIMUM RATINGS	S (T _C = 25 °C, unles	s otherwise noted	d)		
PARAMETER	SYMBOL	LIMIT	UNIT		
Drain-source voltage		V _{DS}	-30	V	
Gate-source voltage		V _{GS}	± 20	V	
Continuous drain current	T _C = 25 °C	1	-75		
Continuous drain current	T _C = 125 °C	- I _D	-45		
Continuous source current (diode conduction)		I _S	-75	Α	
Pulsed drain current ^a		I _{DM}	-200		
Single pulse avalanche current	L = 0.1 mH	I _{AS}	-40		
Single pulse avalanche energy	L = 0.1 MH	E _{AS}	70	mJ	
Maximum navay discination 3	T _C = 25 °C 83	W			
Maximum power dissipation ^a	T _C = 125 °C	P_{D}	27	VV	
Operating junction and storage temperature range		T _J , T _{stg}	-55 to +175	°C	
Soldering recommendations (peak temperature) d, e		•	260	·C	

THERMAL RESISTANCE RATINGS				
PARAMETER		SYMBOL	LIMIT	UNIT
Junction to ambient	PCB mount b	R _{thJA}	65	°C/W
Junction to case (drain)		R_{thJC}	1.8	C/VV

Notes

- a. Pulse test; pulse width $\leq 300~\mu s,$ duty cycle $\leq 2~\%$
- b. When mounted on 1" square PCB (FR4 material)
- c. Parametric verification ongoing
- d. See solder profile (www.vishay.com/doc?73257). The PowerPAK SO-8L is a leadless package. The end of the lead terminal is exposed copper (not plated) as a result of the singulation process in manufacturing. A solder fillet at the exposed copper tip cannot be guaranteed and is not required to ensure adequate bottom side solder interconnection
- e. Rework conditions: manual soldering with a soldering iron is not recommended for leadless components



www.vishay.com

Vishay Siliconix

PARAMETER	SYMBOL	TES	TEST CONDITIONS		TYP.	MAX.	UNIT
Static	<u> </u>	1				I.	
Drain-Source Breakdown Voltage	V _{DS}	V _{GS}	= 0, I _D = -250 μA	-30	-	-	.,
Gate-Source Threshold Voltage		V _{DS} =	V _{GS} , I _D = -250 μA	-1.5	-2.0	-2.5	V
Gate-Source Leakage	I _{GSS}	V _{DS} =	$0 \text{ V}, \text{ V}_{GS} = \pm 20 \text{ V}$	-	-	± 100	nA
	Voltage V _{DS} Voltage V _{GS(th)} Ilage V _{GS(th)} Uurrent I _{DSS} V _O	$V_{GS} = 0 V$	$V_{DS} = -30 \text{ V}$	-	-	-1	
Zero Gate Voltage Drain Current	I _{DSS}	$V_{GS} = 0 V$	V _{DS} = -30 V, T _J = 125 °C	-	-	-50	μΑ
		$V_{GS} = 0 V$	V _{DS} = -30 V, T _J = 175 °C	-	-	-150	1
On-State Drain Current ^a	I _{D(on)}	V _{GS} = -10 V	$V_{DS} \le -5 \text{ V}$	-30	-	-	Α
		V _{GS} = -10 V	I _D = -16 A	-	0.0064	0.0081	V D nA μA 1 0 Ω S PF nC Ω ns
Dunin Course On Chata Basistana 3		V _{GS} = -4.5 V	I _D = -12 A	-	0.0118	0.0170	
Drain-Source On-State Resistance a	HDS(on)	V _{GS} = -10 V	I _D = -16 A, T _J = 125 °C	-	0.0085	-	1 22
		V _{GS} = -10 V	I _D = -16 A, T _J = 175 °C	-	0.0100	-	1
Forward Transconductance b	9 _{fs}	V _{DS} =	-15 V, I _D = -13.8 A	-	40	-	S
Dynamic ^b							
Input Capacitance	C _{iss}			-	3683	4877	
Output Capacitance	C _{oss}	$V_{GS} = 0 V$	$V_{DS} = -15 \text{ V, f} = 1 \text{ MHz}$	-	775	1072	pF
Reverse Transfer Capacitance				-	561	695	
Total Gate Charge c	Qg			-	72	108	
Gate-Source Charge c	Q_{gs}	V _{GS} = -10 V	$V_{DS} = -15 \text{ V}, I_{D} = -15 \text{ A}$	-	12	-	nC
Gate-Drain Charge ^c	Q _{gd}			-	20	-	
Gate Resistance			f = 1 MHz	0.5	1.1	2	Ω
Turn-On Delay Time ^c	t _{d(on)}			-	17	26	
Rise Time ^c	t _r	V _{DD} =	: -20 V, R _I = 15 Ω	-	21	31	
Turn-Off Delay Time ^c	t _{d(off)}	I _D ≅ -1 Å, \	$V_{\rm GEN} = -10$ V, $R_{\rm g} = 6 \Omega$	-	79	110	ns
Fall Time ^c	t _f	7		-	49	69	
Source-Drain Diode Ratings and Chara	acteristics b						
Pulsed Current a	I _{SM}			_	_	-200	Α


Notes

- a. Pulse test; pulse width $\leq 300~\mu s,~duty~cycle \leq 2~\%.$
- b. Guaranteed by design, not subject to production testing.
- c. Independent of operating temperature.


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.




TYPICAL CHARACTERISTICS (T_A = 25 °C, unless otherwise noted)




Output Characteristics




Transfer Characteristics






Capacitance




Transfer Characteristics




On-Resistance vs. Drain Current




TYPICAL CHARACTERISTICS (T_A = 25 °C, unless otherwise noted)




Gate Charge




On-Resistance vs. Junction Temperature




On-Resistance vs. Gate-to-Source Voltage



Source Drain Diode Forward Voltage




Threshold Voltage




Drain Source Breakdown vs. Junction Temperature



THERMAL RATINGS ($T_A = 25$ °C, unless otherwise noted)




Safe Operating Area

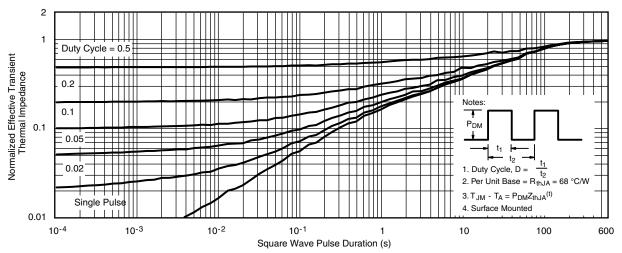

Normalized Thermal Transient Impedance, Junction-to-Ambient



THERMAL RATINGS (T_A = 25 °C, unless otherwise noted)

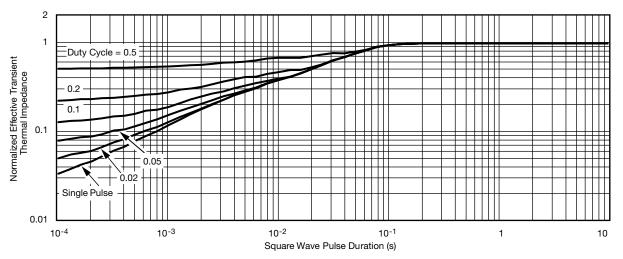

Normalized Thermal Transient Impedance, Junction-to-Case

Note

- The characteristics shown in the two graphs
 - Normalized Transient Thermal Impedance Junction-to-Ambient (25 °C)
 - Normalized Transient Thermal Impedance Junction-to-Case (25 °C) are given for general guidelines only to enable the user to get a "ball park" indication of part capabilities. The data are extracted from single pulse transient thermal impedance characteristics which are developed from empirical measurements. The latter is valid for the part

mounted on printed circuit board - FR4, size 1" x 1" x 0.062", double sided with 2 oz. copper, 100 % on both sides. The part capabilities can widely vary depending on actual application parameters and operating conditions.



PowerPAK® SO-8L Case Outline 2





www.vishay.com

Vishay Siliconix

DIM	MILLIMETERS			INCHES			
DIM.	MIN.	NOM.	MAX.	MIN.	NOM.	MAX	
Α	1.00	1.07	1.14	0.039	0.042	0.045	
A1	0.00	-	0.127	0.00	-	0.005	
b	0.33	0.41	0.48	0.013	0.016	0.019	
b1	0.44	0.51	0.58	0.017	0.020	0.023	
b2	4.80	4.90	5.00	0.189	0.193	0.197	
b3		0.094			0.004		
b4		0.47			0.019		
С	0.20	0.25	0.30	0.008	0.010	0.012	
D	5.00	5.13	5.25	0.197	0.202	0.207	
D1	4.80	4.90	5.00	0.189	0.193	0.197	
D2	3.86	3.96	4.06	0.152	0.156	0.160	
D3	1.63	1.73	1.83	0.064	0.068	0.072	
е		1.27 BSC		0.050 BSC			
Е	6.05	6.15	6.25	0.238	0.242	0.246	
E1	4.27	4.37	4.47	0.168	0.172	0.176	
E2	2.75	2.85	2.95	0.108	0.112	0.116	
E3	6.05	6.22	6.40	0.238	0.245	0.252	
F	-	-	0.15	-	-	0.006	
L	0.62	0.72	0.82	0.024	0.028	0.032	
L1	0.92	1.07	1.22	0.036	0.042	0.048	
K		0.51		0.020			
W	0.23			0.009			
W1		0.41			0.016		
W2	2.82		0.111				
W3		2.96			0.117		
θ	0°	-	10°	0°	-	10°	

DWG: 6044

Note

• Millimeters will govern



RECOMMENDED MINIMUM PAD FOR PowerPAK® SO-8L SINGLE



Recommended Minimum Pads Dimensions in mm (inches)



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.