SiZ342DT


RoHS

COMPLIANT HALOGEN



## Dual N-Channel 30 V (D-S) MOSFET

PRODUCT SUMMARY					
	V <sub>DS</sub> (V)	R <sub>DS(on)</sub> (Ω) MAX.	I <sub>D</sub> (A)	Q <sub>g</sub> (Typ.)	
Channel-1		0.0115 at V <sub>GS</sub> = 10 V	30 <sup>a</sup>		
and Channel-2	30	0.0153 at $V_{GS}$ = 4.5 V	27.5	4.5 nC	



#### **Ordering Information:**


SiZ342DT-T1-GE3 (lead (Pb)-free and halogen-free)

### **FEATURES**

- PowerPAIR<sup>®</sup> optimizes high-side and low-side MOSFETs for synchronous buck converters
- TrenchFET<sup>®</sup> Gen IV power MOSFETs
- 100 % R<sub>q</sub> and UIS tested
- FREE Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

### APPLICATIONS

- Synchronous buck
  - Battery charging
  - Computer system power
  - Graphic cards
- POL



PARAMETER		CHANNEL-1 AND CHANNEL-2				
		SYMBOL	LIMIT	UNIT		
Drain-Source Voltage		V <sub>DS</sub>	30	v		
Gate-Source Voltage		V <sub>GS</sub>	+20 / -16	v		
	T <sub>C</sub> = 25 °C		30 <sup>a</sup>			
Continuous Drain Current (T. 150 °C)	T <sub>C</sub> = 70 °C		26.5			
Continuous Drain Current (T <sub>J</sub> = 150 °C)	T <sub>A</sub> = 25 °C	I <sub>D</sub>	15.6 <sup>b, c</sup>			
	T <sub>A</sub> = 70 °C		12.4 <sup>b, c</sup>			
Pulsed Drain Current (t = 100 µs)		I <sub>DM</sub>	100	- A		
Continuous Courses Ducia Diada Courset	T <sub>C</sub> = 25 °C		13.9			
Continuous Source Drain Diode Current	T <sub>A</sub> = 25 °C	I <sub>S</sub>	3.1 <sup>b, c</sup>			
Avalanche Current L = 0.1 mH		I <sub>AS</sub>	10			
Single Pulse Avalanche Energy	L = 0.1 MH	E <sub>AS</sub>	5	mJ		
	T <sub>C</sub> = 25 °C		16.7			
Meximum Device Dissinction	T <sub>C</sub> = 70 °C		10.7	w		
Maximum Power Dissipation	T <sub>A</sub> = 25 °C	P <sub>D</sub>	3.7 <sup>b, c</sup>	VV		
	T <sub>A</sub> = 70 °C		2.4 <sup>b, c</sup>			
Operating Junction and Storage Temperature Range		T <sub>J</sub> , T <sub>stg</sub>	-55 to 150	°C		
Soldering Recommendations (Peak Temperatur	e) <sup>d, e</sup>		260			

#### Notes

- a. Package limited.
- b. Surface mounted on 1" x 1" FR4 board.

- d. See solder profile (www.vishay.com/doc?73257). The PowerPAIR 3 x 3 is a leadless package. The end of the lead terminal is exposed copper (not plated) as a result of the singulation process in manufacturing. A solder fillet at the exposed copper tip cannot be guaranteed and is not required to ensure adequate bottom side solder interconnection.
- e. Rework conditions: manual soldering with a soldering iron is not recommended for leadless components.

1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishav.com/doc?91000

c. t = 10 s.



### THERMAL RESISTANCE RATINGS

PARAMETER		CHANNEL-1 AND CHANNEL-2				
		SYMBOL	TYP.	MAX.	UNIT	
Maximum Junction-to-Ambient a, b	t ≤ 10 s	R <sub>thJA</sub>	27	34	°C/W	
Maximum Junction-to-Case (Drain)	Steady State	R <sub>thJC</sub>	6	7.5	0/11	

Notes

a. Surface mounted on 1" x 1" FR4 board.

b. Maximum under steady state conditions is 69 °C/W.

SPECIFICATIONS (T <sub>J</sub> = 25 °C	unless othe	rwise noted)						
DADAMETED	CHANNEL-1 AND CHANNEL-2							
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT		
Static						•		
Drain-Source Breakdown Voltage	V <sub>DS</sub>	$V_{GS} = 0 \text{ V}, \text{ I}_{D} = 250 \mu\text{A}$	30	-	-	V		
V <sub>DS</sub> Temperature Coefficient	$\Delta V_{DS}/T_{J}$	I <sub>D</sub> = 250 μA	-	20	-	m)//°C		
V <sub>GS(th)</sub> Temperature Coefficient	$\Delta V_{GS(th)}/T_J$	I <sub>D</sub> = 250 μA	-	-5.6	-	mV/°C		
Gate Threshold Voltage	V <sub>GS(th)</sub>	$V_{DS} = V_{GS}, I_D = 250 \ \mu A$	1.2	-	2.4	V		
Gate Source Leakage	I <sub>GSS</sub>	$V_{DS}$ =0 V, $V_{GS}$ = +20 V/ -16 V	-	-	± 100	nA		
Zana Oata Malta na Duain Orumant		$V_{DS} = 30 \text{ V}, \text{ V}_{GS} = 0 \text{ V}$	-	I. TYP. M   - 20 -   20 -5.6 2   -5.6 2 -   - 2 -   - 2 -   - 2 -   - 2 -   - 2 -   0.0084 0.0 0.0111   0.0111 0.0 37   650 236 -   20 3 - 0   33 - 0 2   34 - 0.7 6.6   35 1.4 2 2   15 2 2 15   350 3 - 2   16 2 3 -	1			
Zero Gate Voltage Drain Current	IDSS	$V_{DS} = 30 \text{ V}, \text{ V}_{GS} = 0 \text{ V}, \text{ T}_{J} = 55 ^{\circ}\text{C}$	-	-	5	μA		
On-State Drain Current <sup>b</sup>	I <sub>D(on)</sub>	$V_{DS} \le 5 \text{ V}, V_{GS} = 10 \text{ V}$	10	-	-	А		
Drain-Source On-State Resistance <sup>b</sup>		V <sub>GS</sub> = 10 V, I <sub>D</sub> = 14.4 A	-	0.0084	0.0115	0		
Drain-Source On-State Resistance <sup>5</sup>	R <sub>DS(on)</sub>	$V_{GS} = 4.5 \text{ V}, \text{ I}_{D} = 13 \text{ A}$	-	0.0111	0.0153	Ω		
Forward Transconductance <sup>b</sup>	g <sub>fs</sub>	V <sub>DS</sub> = 15 V, I <sub>D</sub> = 14.4 A	-	37	-	S		
Dynamic <sup>a</sup>						•		
Input Capacitance	C <sub>iss</sub>	$\begin{tabular}{ c c c c } \hline ${\sf LEST CONDITIONS}$ & ${\sf MIN}$ & ${\sf TYP}$, $${\sf M}$ \\ \hline ${\sf V}_{GS} = 0 \ V, \ I_D = 250 \ \mu A $$ $$ $$ $$ $$ $$ $$ $$ $$ $$ $$ $$ $$	-					
Output Capacitance	C <sub>oss</sub>		-	236	-	pF		
Reverse Transfer Capacitance	C <sub>rss</sub>		-	20	-			
C <sub>rss</sub> / C <sub>iss</sub> Ratio			0.03	-	0.06	-		
Tatal Oata Ohanna	0	$V_{DS} = 15 \text{ V}, V_{GS} = 10 \text{ V}, I_D = 14.4 \text{ A}$	-	10	20			
Total Gate Charge	Qg		-	4.5	9			
Gate-Source Charge	Q <sub>gs</sub>		-	2.1	-	nC		
Gate-Drain Charge	Q <sub>gd</sub>	$v_{\rm DS} = 15 v, v_{\rm GS} = 4.5 v, I_{\rm D} = 14.4 \text{ A}$	-	0.7	-			
Output Charge	Q <sub>oss</sub>		-	6.6	-			
Gate Resistance	R <sub>g</sub>	f = 1 MHz	0.3	1.4	2.8	Ω		
Turn-On Delay Time	t <sub>d(on)</sub>		-	15	23			
Rise Time	tr	$V_{DD}$ = 15 V, $R_L$ = 1.5 $\Omega$	-	50	75	1		
Turn-Off Delay Time	t <sub>d(off)</sub>	$I_D \cong 10$ Å, $V_{GEN} = 4.5$ V, $R_g = 1$ $\Omega$	-	16	24	1		
Fall Time	t <sub>f</sub>		-	10	20	1		
Turn-On Delay Time	t <sub>d(on)</sub>		-	8	16	ns		
Rise Time	tr	$V_{DD}$ = 15 V, $R_L$ = 1.5 $\Omega$	-	15	23	1		
Turn-Off Delay Time	t <sub>d(off)</sub>	$I_D \cong 10$ Å, $V_{GEN} = 10$ V, $R_g = 1$ $\Omega$	-	17	26	1		
Fall Time	t <sub>f</sub>		-	7	14	1		

2



## SiZ342DT

Vishay Siliconix

## **SPECIFICATIONS** ( $T_J = 25 \text{ °C}$ , unless otherwise noted)

PARAMETER	CHANNEL-1 AND CHANNEL-2							
PARAMETER	SYMBOL TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT		
Drain-Source Body Diode Characteristic	s							
Continuous Source-Drain Diode Current	I <sub>S</sub>	T <sub>C</sub> = 25 °C	-	-	13.9	^		
Pulse Diode Forward Current (t = 100 µs)	I <sub>SM</sub>		-	-	100	A		
Body Diode Voltage	V <sub>SD</sub>	$I_{\rm S} = 10$ A, $V_{\rm GS} = 0$ V	-	0.8	1.2	V		
Body Diode Reverse Recovery Time	t <sub>rr</sub>		-	20	35	ns		
Body Diode Reverse Recovery Charge	Q <sub>rr</sub>	I <sub>F</sub> = 10 A, dl/dt = 100 A/μs, Τ <sub>.1</sub> = 25 °C	-	10	20	nC		
Reverse Recovery Fall Time	ta	$F = 10 \text{ A}, \text{ u/ul} = 100 \text{ A/} \text{µs}, T_{\text{J}} = 25 \text{ C}$	-	12.5	-			
Reverse Recovery Rise Time	t <sub>b</sub>	1	-	7.5	-	ns		

Notes

a. Guaranteed by design, not subject to production testing.

b. Pulse test; pulse width  $\leq$  300 µs, duty cycle  $\leq$  2 %.


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


SiZ342DT




Vishay Siliconix

## CHANNEL-1 AND CHANNEL-2 TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

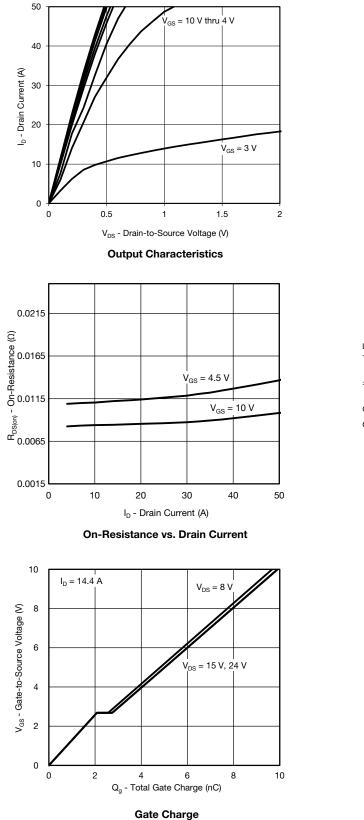

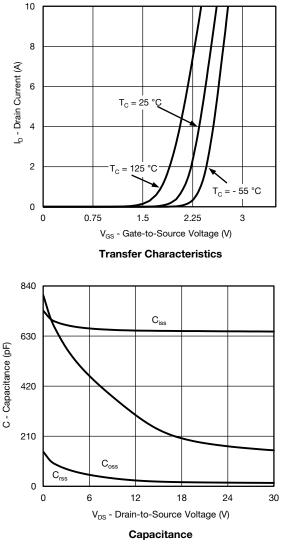



S15-0031-Rev. B, 19-Jan-15

4 uestions, contact; pmostechsupport Document Number: 62949


For technical questions, contact: <u>pmostechsupport@vishay.com</u> THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <u>www.vishay.com/doc?91000</u>

SiZ342DT



Vishay Siliconix

## CHANNEL-1 AND CHANNEL-2 TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

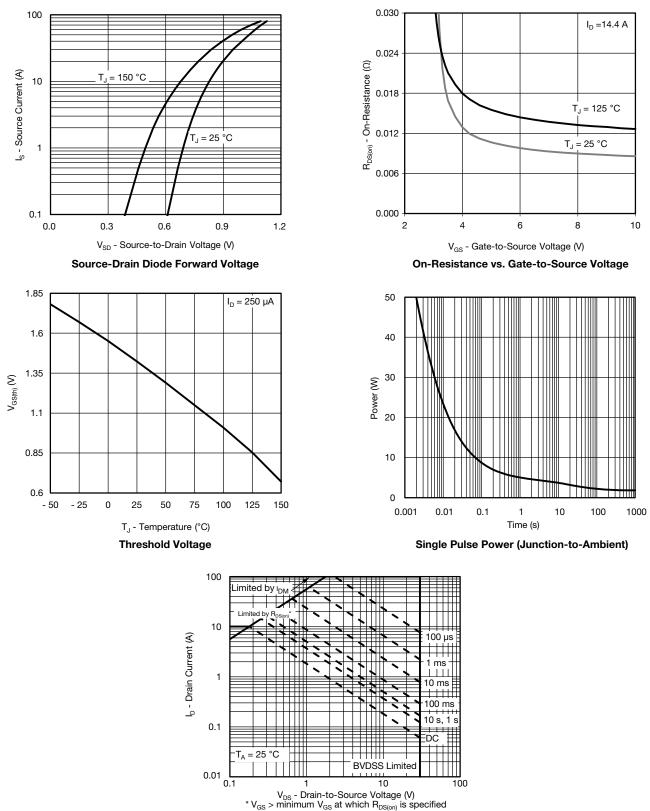

Safe Operating Area, Junction-to-Ambient


5

Document Number: 62949

For technical questions, contact: <u>pmostechsupport@vishay.com</u> THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <u>www.vishay.com/doc?91000</u>




### CHANNEL-1 AND CHANNEL-2 TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

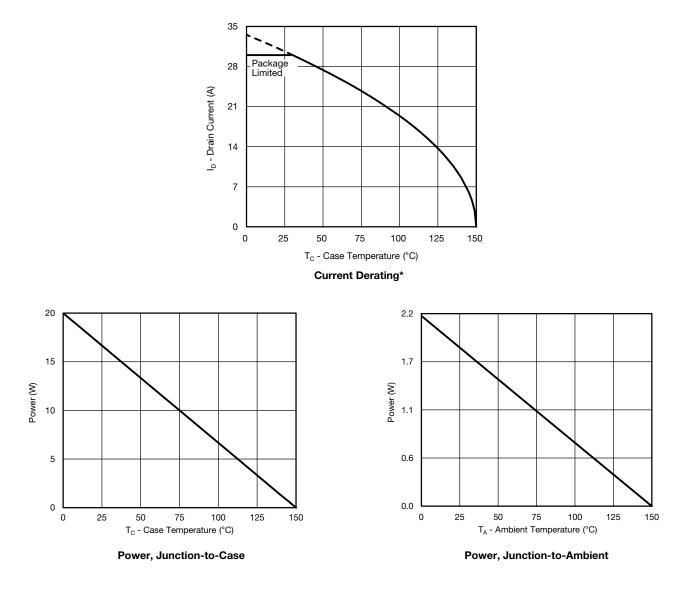


\* The power dissipation  $P_D$  is based on  $T_{J (max.)} = 150 \text{ °C}$ , using junction-to-case thermal resistance, and is more useful in settling the upper dissipation limit for cases where additional heatsinking is used. It is used to determine the current rating, when this rating falls below the package limit.





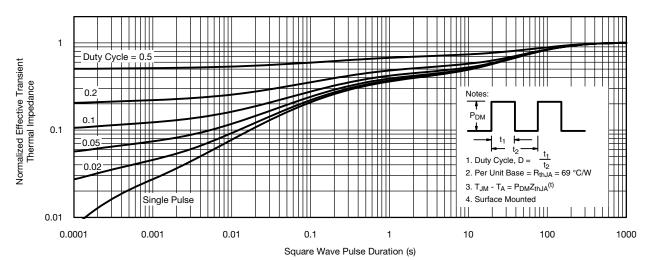

Normalized Thermal Transient Impedance, Junction-to-Ambient

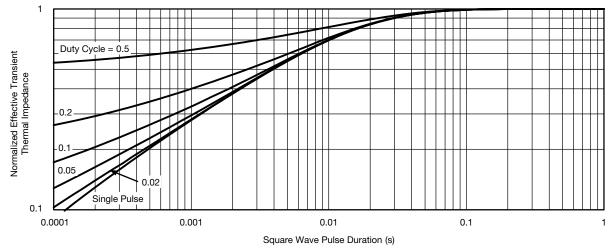



Normalized Thermal Transient Impedance, Junction-to-Case

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see www.vishay.com/ppg?62949.

7





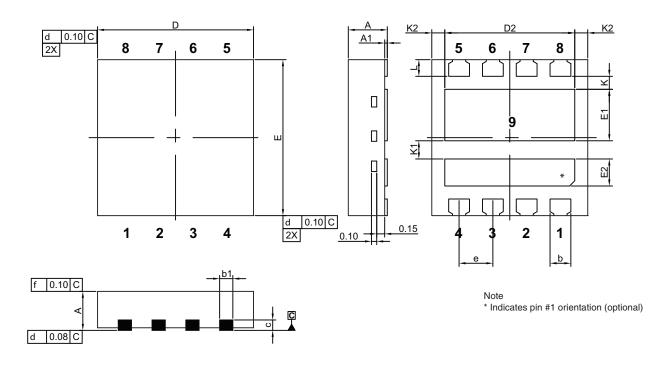


		MILLIMETERS		INCHES				
DIM.	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.		
А	0.70	0.75	0.80	0.028	0.030	0.031		
A1	0.00		0.05	0.000		0.002		
b	0.35	0.40	0.45	0.014	0.016	0.018		
b1	0.20	0.25	0.38	0.008	0.010	0.015		
С	0.18	0.20	0.23	0.007	0.008	0.009		
D	2.90	3.00	3.10	0.114	0.118	0.122		
D2	2.35	2.40	2.45	0.093	0.094	0.096		
E	2.90	3.00	3.10	0.114	0.118	0.122		
E1	0.94	0.99	1.04	0.037	0.039	0.041		
E2	0.47	0.52	0.57	0.019	0.020	0.022		
е		0.65 BSC			0.026 BSC			
К		0.25 typ.			0.010 typ.			
K1		0.35 typ.			0.014 typ.			
K2	0.30 typ.			0.012 typ.				
L	0.27	0.32	0.37	0.011	0.013	0.015		



PAD Pattern

Vishay Siliconix

#### **RECOMMENDED MINIMUM PAD FOR PowerPAIR® 3 x 3**

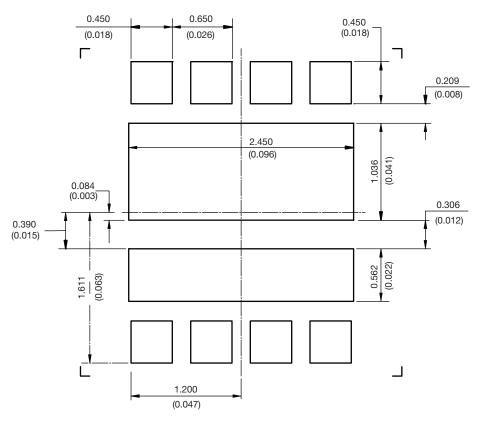

Recommended PAD for PowerPAIR 3 x 3 Dimensions in millimeters (inches) Keep-Out 3.5 mm x 3.5 mm for non terminating traces



Vishay

## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2025 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

Revision: 01-Jan-2025

1