

P-Channel 20 V (D-S) MOSFET

PRODUCT SUMMARY			
V_{DS} (V)	$R_{DS(on)}$ (Ω)	I_D (A) ^c	Q_g (Typ.)
- 20	0.140 at $V_{GS} = - 4.5$ V	- 2.1	4 nC
	0.160 at $V_{GS} = - 3.6$ V	- 1.9	
	0.222 at $V_{GS} = - 2.5$ V	- 1.6	

FEATURES




- Halogen-free According to IEC 61249-2-21 Definition
- TrenchFET[®] Power MOSFET
- 100 % R_g Tested
- Compliant to RoHS Directive 2002/95/EC



RoHS
COMPLIANT
HALOGEN
FREE

APPLICATIONS

- Load Switch for Portable Devices
- DC/DC Converters



Ordering Information: Si1403CDL-T1-GE3 (Lead (Pb)-free and Halogen-free)

P-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS ($T_A = 25$ °C, unless otherwise noted)				
Parameter	Symbol	Limit	Unit	
Drain-Source Voltage	V_{DS}	- 20	V	
Gate-Source Voltage	V_{GS}	± 12		
Continuous Drain Current ($T_J = 150$ °C)	I_D	$T_C = 25$ °C	- 2.1	A
		$T_C = 70$ °C	- 1.6	
		$T_A = 25$ °C	- 1.6 ^{a, b}	
		$T_A = 70$ °C	- 1.3 ^{a, b}	
Pulsed Drain Current (10 μ s Pulse Width)	I_{DM}	- 5		
Continuous Source-Drain Diode Current	I_S	$T_C = 25$ °C	- 1.75	
		$T_A = 25$ °C	- 0.5 ^{a, b}	
Maximum Power Dissipation	P_D	$T_C = 25$ °C	0.9	W
		$T_C = 70$ °C	0.6	
		$T_A = 25$ °C	0.6 ^{a, b}	
		$T_A = 70$ °C	0.4 ^{a, b}	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	- 55 to 150	°C	

THERMAL RESISTANCE RATINGS					
Parameter	Symbol	Typical	Maximum	Unit	
Maximum Junction-to-Ambient ^{a, d}	R_{thJA}	180	220	°C/W	
Maximum Junction-to-Foot (Drain)	R_{thJF}	115	140		

Notes:

- Surface mounted on 1" x 1" FR4 board.
- $t = 5$ s.
- Based on $T_C = 25$ °C.
- Maximum under steady state conditions is 230 °C/W.


SPECIFICATIONS ($T_J = 25\text{ }^\circ\text{C}$, unless otherwise noted)						
Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Static						
Drain-Source Breakdown Voltage	V_{DS}	$V_{GS} = 0\text{ V}, I_D = -250\text{ }\mu\text{A}$	-20			V
V_{DS} Temperature Coefficient	$\Delta V_{DS}/T_J$	$I_D = -250\text{ }\mu\text{A}$		-15		mV/°C
$V_{GS(th)}$ Temperature Coefficient	$\Delta V_{GS(th)}/T_J$			2.9		
Gate-Source Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\text{ }\mu\text{A}$	-0.6		-1.5	V
Gate-Source Leakage	I_{GSS}	$V_{DS} = 0\text{ V}, V_{GS} = \pm 12\text{ V}$			-100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -20\text{ V}, V_{GS} = 0\text{ V}$			-1	μA
		$V_{DS} = -20\text{ V}, V_{GS} = 0\text{ V}, T_J = 55\text{ }^\circ\text{C}$			-10	
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} \leq 5\text{ V}, V_{GS} = -4.5\text{ V}$	-2			A
Drain-Source On-State Resistance ^a	$R_{DS(on)}$	$V_{GS} = -4.5\text{ V}, I_D = -1.6\text{ A}$		0.116	0.140	Ω
		$V_{GS} = -3.6\text{ V}, I_D = -1.5\text{ A}$		0.133	0.160	
		$V_{GS} = -2.5\text{ V}, I_D = -0.5\text{ A}$		0.177	0.222	
Forward Transconductance ^a	g_{fs}	$V_{DS} = -10\text{ V}, I_D = -1.6\text{ A}$		5		S
Dynamic^b						
Input Capacitance	C_{iss}	$V_{DS} = -10\text{ V}, V_{GS} = 0\text{ V}, f = 1\text{ MHz}$		281		μF
Output Capacitance	C_{oss}			73		
Reverse Transfer Capacitance	C_{rss}			54		
Total Gate Charge	Q_g	$V_{DS} = -10\text{ V}, V_{GS} = -4.5\text{ V}, I_D = -1.6\text{ A}$		4	8	nC
Gate-Source Charge	Q_{gs}			0.7		
Gate-Drain Charge	Q_{gd}			1.4		
Gate Resistance	R_g	$f = 1\text{ MHz}$	2	7	14	Ω
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = -10\text{ V}, R_L = 7.7\text{ }\Omega$ $I_D \cong -1.3\text{ A}, V_{GEN} = -4.5\text{ V}, R_g = 1\text{ }\Omega$		18	27	ns
Rise Time	t_r			17	26	
Turn-Off Delay Time	$t_{d(off)}$			19	30	
Fall Time	t_f			9	18	
Turn-On Delay Time	$t_{d(on)}$	$V_{DD} = -10\text{ V}, R_L = 7.7\text{ }\Omega$ $I_D \cong -1.3\text{ A}, V_{GEN} = -10\text{ V}, R_g = 1\text{ }\Omega$		5	10	
Rise Time	t_r			10	20	
Turn-Off Delay Time	$t_{d(off)}$			17	26	
Fall Time	t_f			7	14	
Drain-Source Body Diode Characteristics						
Continuous Source-Drain Diode Current	I_S	$T_C = 25\text{ }^\circ\text{C}$			-1.75	A
Pulse Diode Forward Current	I_{SM}				-5	
Body Diode Voltage	V_{SD}	$I_S = -1.3\text{ A}, V_{GS} = 0\text{ V}$		-0.83	-1.2	V
Body Diode Reverse Recovery Time	t_{rr}	$I_F = -2.0\text{ A}, di/dt = 100\text{ A}/\mu\text{s}, T_J = 25\text{ }^\circ\text{C}$		12	20	ns
Body Diode Reverse Recovery Charge	Q_{rr}			4	8	nC
Reverse Recovery Fall Time	t_a			7		ns
Reverse Recovery Rise Time	t_b			5		

Notes:


- a. Pulse test; pulse width $\leq 300\text{ }\mu\text{s}$, duty cycle $\leq 2\%$.
b. Guaranteed by design, not subject to production testing.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

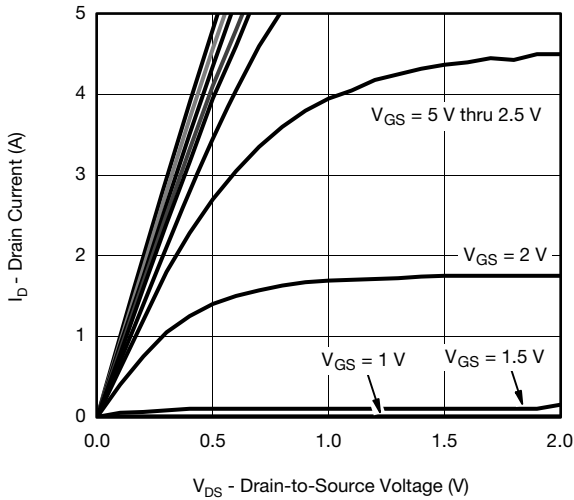


Output Characteristics

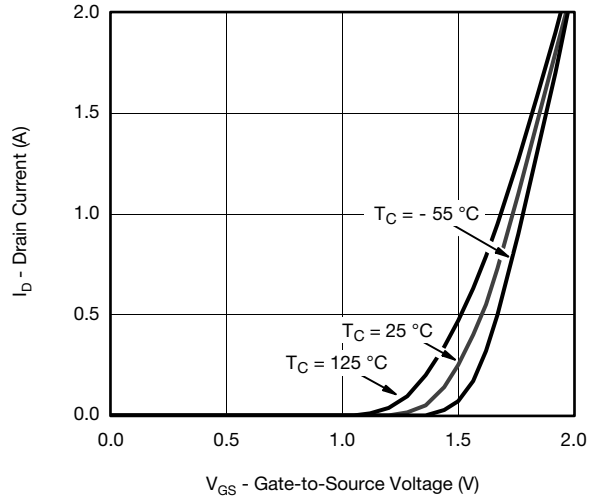


Transfer Characteristics

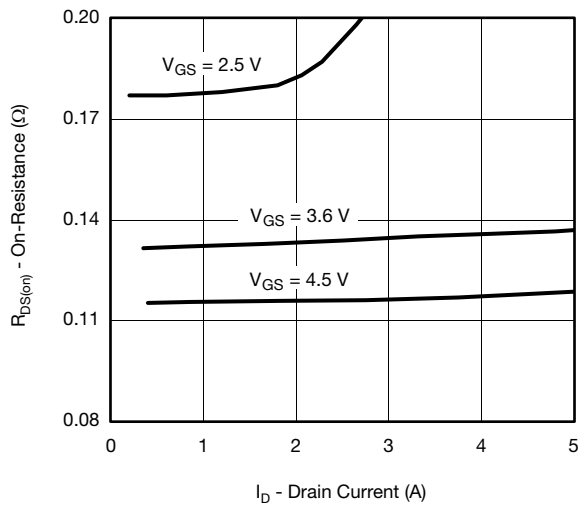


On-Resistance vs. Drain Current and Gate Voltage

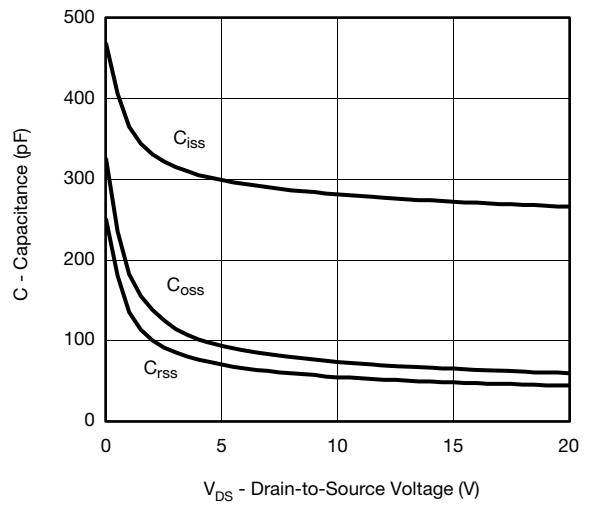

Capacitance





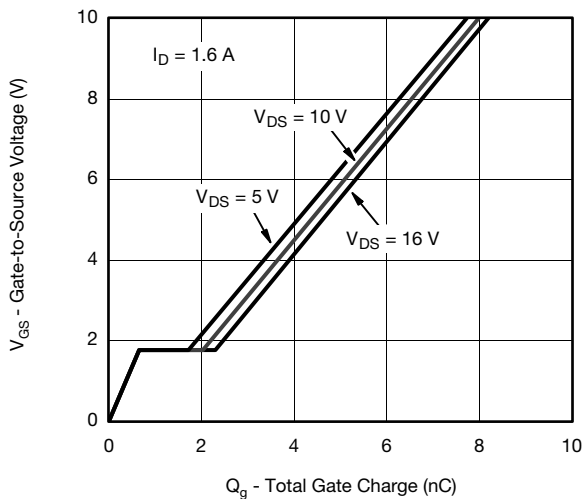


Gate Charge



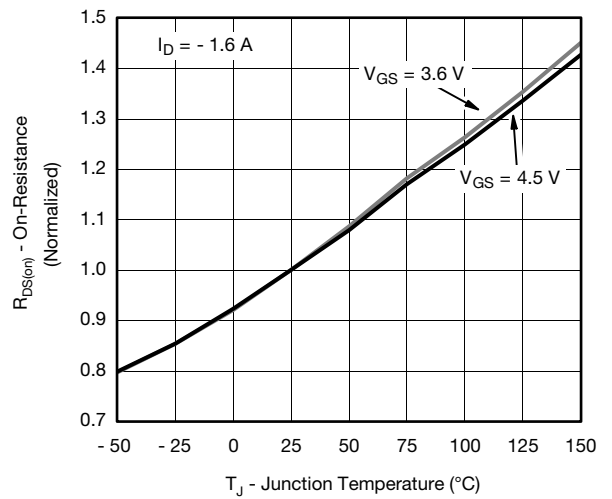


On-Resistance vs. Junction Temperature

TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

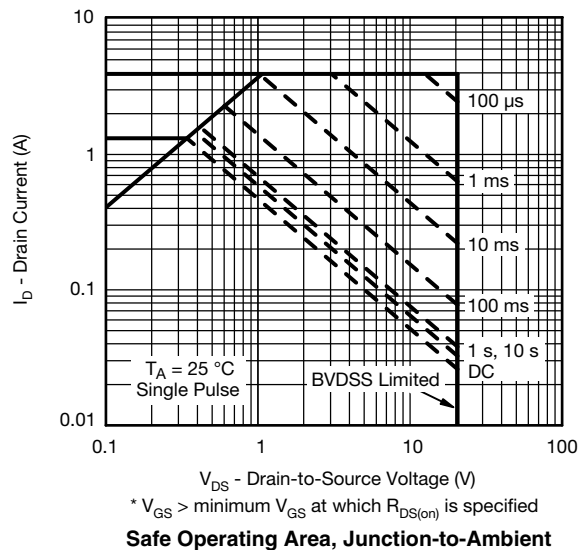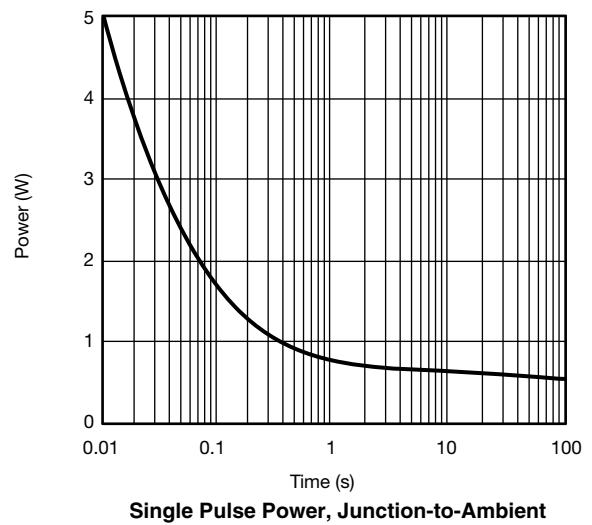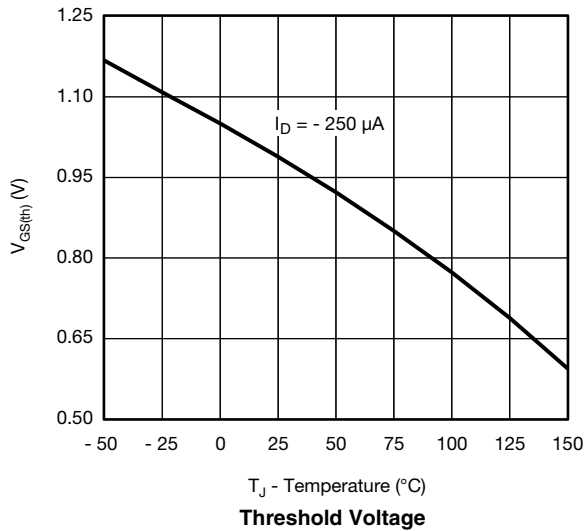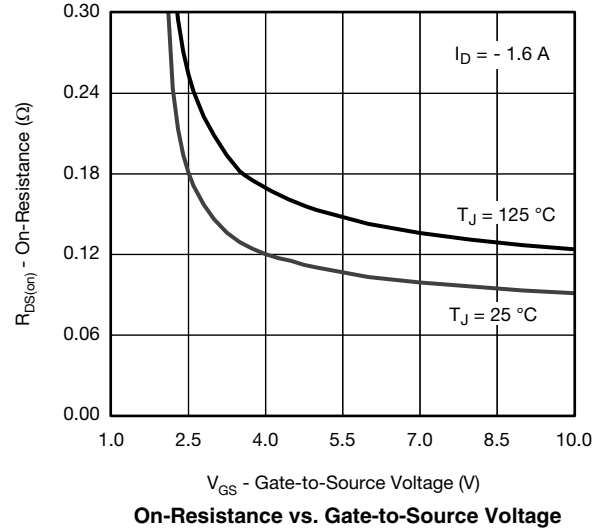
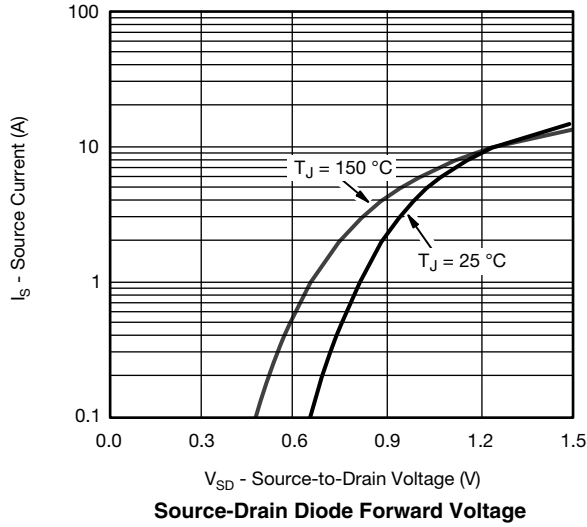


TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

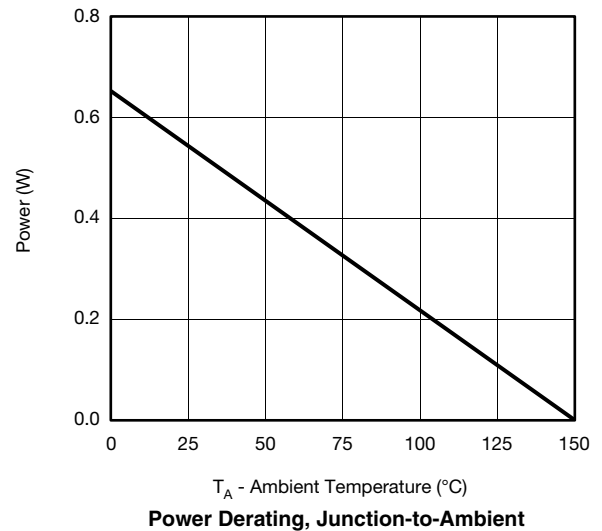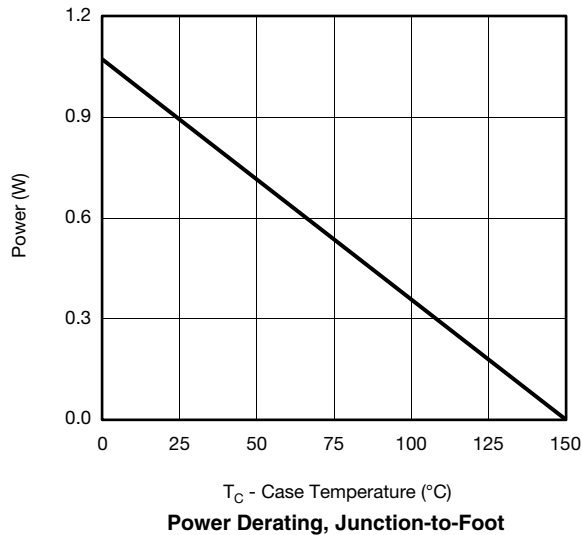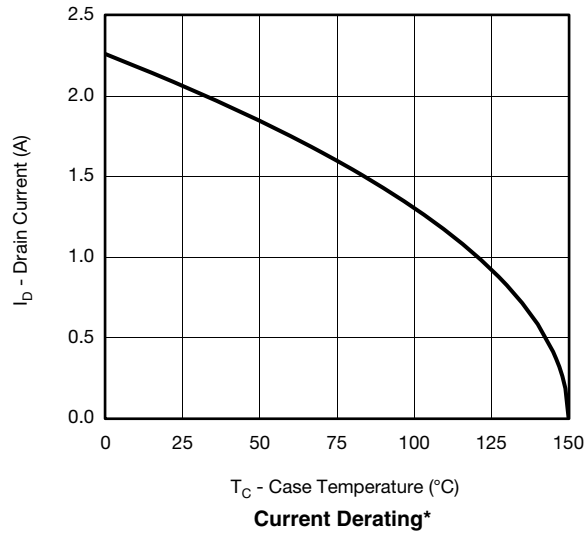

* The power dissipation P_D is based on $T_{J(max)} = 150$ °C, using junction-to-case thermal resistance, and is more useful in settling the upper dissipation limit for cases where additional heatsinking is used. It is used to determine the current rating, when this rating falls below the package limit.

TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

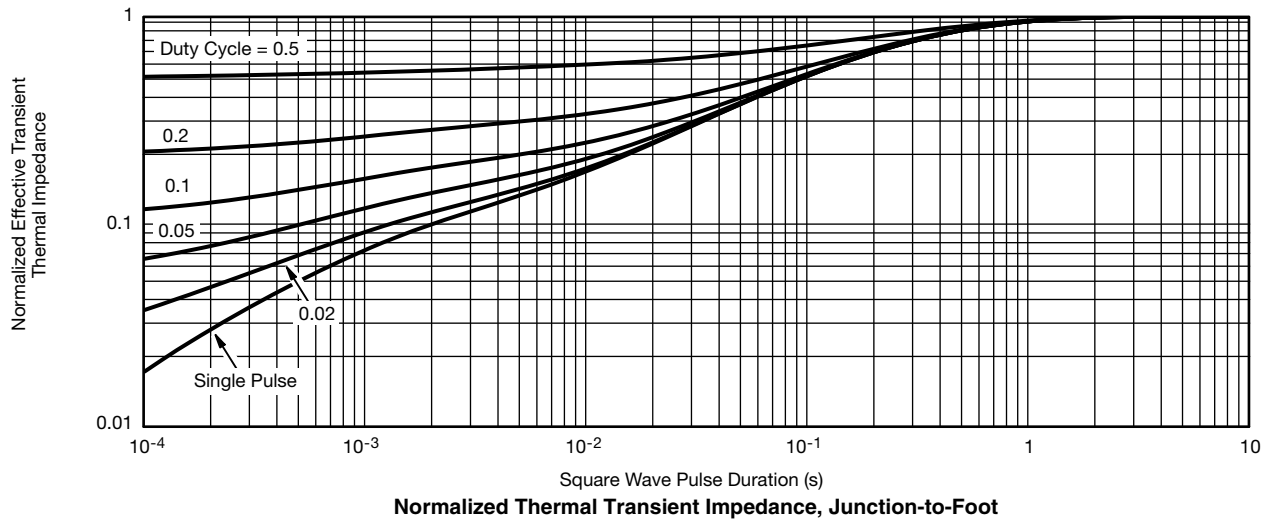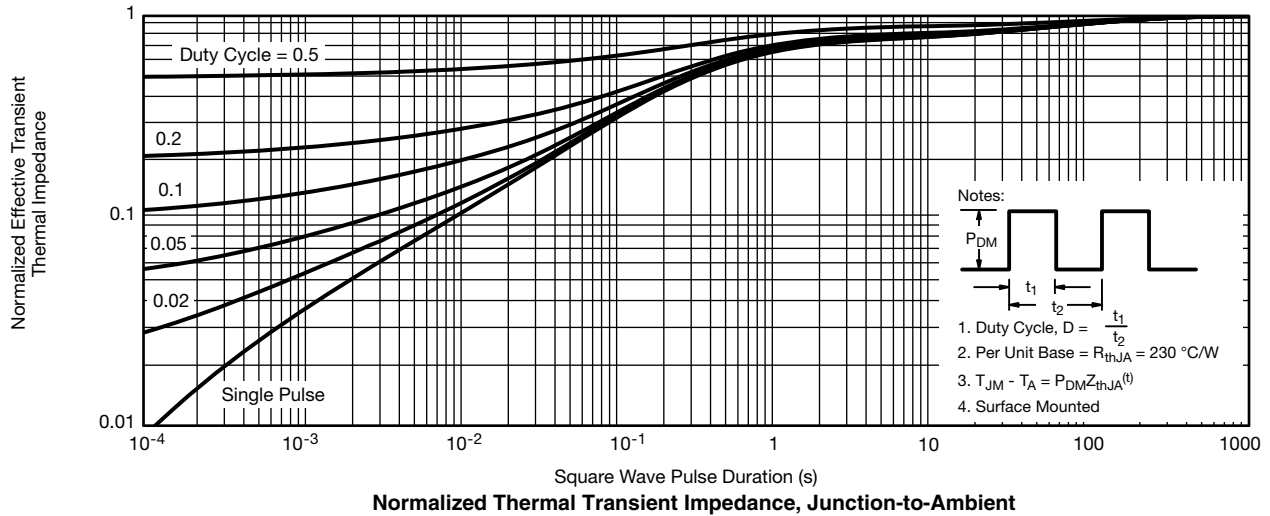

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see www.vishay.com/ppg?67093.

SC-70: 6-LEADS



Dim	MILLIMETERS			INCHES		
	Min	Nom	Max	Min	Nom	Max
A	0.90	-	1.10	0.035	-	0.043
A ₁	-	-	0.10	-	-	0.004
A ₂	0.80	-	1.00	0.031	-	0.039
b	0.15	-	0.30	0.006	-	0.012
c	0.10	-	0.25	0.004	-	0.010
D	1.80	2.00	2.20	0.071	0.079	0.087
E	1.80	2.10	2.40	0.071	0.083	0.094
E ₁	1.15	1.25	1.35	0.045	0.049	0.053
e	0.65BSC			0.026BSC		
e ₁	1.20	1.30	1.40	0.047	0.051	0.055
L	0.10	0.20	0.30	0.004	0.008	0.012
α	7°Nom			7°Nom		

ECN: S-03946—Rev. B, 09-Jul-01
DWG: 5550

Single-Channel LITTLE FOOT® SC-70 3-Pin and 6-Pin MOSFET Recommended Pad Pattern and Thermal Performance

INTRODUCTION

This technical note discusses pin-outs, package outlines, pad patterns, evaluation board layout, and thermal performance for single-channel LITTLE FOOT power MOSFETs in the SC-70 package. These new Vishay Siliconix devices are intended for small-signal applications where a miniaturized package is needed and low levels of current (around 350 mA) need to be switched, either directly or by using a level shift configuration. Vishay provides these single devices with a range of on-resistance specifications and in both traditional 3-pin and new 6-pin versions. The new 6-pin SC-70 package enables improved on-resistance values and enhanced thermal performance compared to the 3-pin package.

PIN-OUT

Figure 1 shows the pin-out description and Pin 1 identification for the single-channel SC-70 device in both 3-pin and 6-pin configurations. The pin-out of the 6-pin device allows the use of four pins as drain leads, which helps to reduce on-resistance and junction-to-ambient thermal resistance.



FIGURE 1.

For package dimensions see outline drawings:
 SC-70 (3-Leads) (<http://www.vishay.com/doc?71153>)
 SC-70 (6-Leads) (<http://www.vishay.com/doc?71154>)

BASIC PAD PATTERNS

See Application Note 826, *Recommended Minimum Pad Patterns With Outline Drawing Access for Vishay Siliconix MOSFETs*, (<http://www.vishay.com/doc?72286>) for the basic pad layout and dimensions for the 3-pin SC-70 and the 6-pin SC-70. These pad patterns are sufficient for the low-power applications for which this package is intended. Increasing the pad pattern has little effect on thermal resistance for the 3-pin device, reducing it by only 10% to 15%. But for the 6-pin device, increasing the pad patterns yields a reduction in thermal resistance on the order of 35% when using a 1-inch square with full copper on both sides of the printed circuit board (PCB). The availability of four drain leads rather than the traditional single drain lead allows a better thermal path from the package to the PCB and external environment.

EVALUATION BOARDS FOR THE SINGLE SC70-3 AND SC70-6

Figure 2 shows the 3-pin and 6-pin SC-70 evaluation boards (EVB). Both measure 0.6 inches by 0.5 inches. Their copper pad traces are the same as described in the previous section, *Basic Pad Patterns*. Both boards allow interrogation from the outer pins to 6-pin DIP connections, permitting test sockets to be used in evaluation testing.

The thermal performance of the single SC-70 has been measured on the EVB for both the 3-pin and 6-pin devices, the results shown in Figures 3 and 4. The minimum recommended footprint on the evaluation board was compared with the industry standard of 1-inch square FR4 PCB with copper on both sides of the board.



FIGURE 2.

Vishay Siliconix

THERMAL PERFORMANCE

**Junction-to-Foot Thermal Resistance
(the Package Performance)**

Thermal performance for the 3-pin SC-70 measured as junction-to-foot thermal resistance is 285°C/W typical, 340°C/W maximum. Junction-to-foot thermal resistance for the 6-pin SC70-6 is 105°C/W typical, 130°C/W maximum — a nearly two-thirds reduction compared with the 3-pin device. The “foot” is the drain lead of the device as it connects with the body. This improved performance is obtained by the increase in drain leads from one to four on the 6-pin SC-70. Note that these numbers are somewhat higher than other LITTLE FOOT devices due to the limited thermal performance of the Alloy 42 lead-frame compared with a standard copper lead-frame.

**Junction-to-Ambient Thermal Resistance
(dependent on PCB size)**

The typical $R\theta_{JA}$ for the single 3-pin SC-70 is 360°C/W steady state, compared with 180°C/W for the 6-pin SC-70. Maximum ratings are 430°C/W for the 3-pin device versus 220°C/W for the 6-pin device. All figures are based on the 1-inch square FR4 test board. The following table shows how the thermal resistance impacts power dissipation for the two different pin-outs at two different ambient temperatures.

SC-70 (3-PIN)	
Room Ambient 25 °C	Elevated Ambient 60 °C
$P_D = \frac{T_{J(max)} - T_A}{R\theta_{JA}}$	$P_D = \frac{T_{J(max)} - T_A}{R\theta_{JA}}$
$P_D = \frac{150^\circ\text{C} - 25^\circ\text{C}}{360^\circ\text{C/W}}$	$P_D = \frac{150^\circ\text{C} - 60^\circ\text{C}}{360^\circ\text{C/W}}$
$P_D = 347 \text{ mW}$	$P_D = 250 \text{ mW}$

SC-70 (6-PIN)	
Room Ambient 25 °C	Elevated Ambient 60 °C
$P_D = \frac{T_{J(max)} - T_A}{R\theta_{JA}}$	$P_D = \frac{T_{J(max)} - T_A}{R\theta_{JA}}$
$P_D = \frac{150^\circ\text{C} - 25^\circ\text{C}}{180^\circ\text{C/W}}$	$P_D = \frac{150^\circ\text{C} - 60^\circ\text{C}}{180^\circ\text{C/W}}$
$P_D = 694 \text{ mW}$	$P_D = 500 \text{ mW}$

NOTE: Although they are intended for low-power applications, devices in the 6-pin SC-70 will handle power dissipation in excess of 0.5 W.

Testing

To aid comparison further, Figures 3 and 4 illustrate single-channel SC-70 thermal performance on two different board sizes and two different pad patterns. The results display the thermal performance out to steady state and produce a graphic account of the thermal performance variation between the two packages. The measured steady state values of $R\theta_{JA}$ for the single 3-pin and 6-pin SC-70 are as follows:

LITTLE FOOT SC-70	3-Pin	6-Pin
1) Minimum recommended pad pattern (see Figure 4) on the EVB.	410.31°C/W	329.7°C/W
2) Industry standard 1" square PCB with maximum copper both sides.	360°C/W	211.8°C/W

The results show that designers can reduce thermal resistance $R\theta_{JA}$ on the order of 20% simply by using the 6-pin device rather than the 3-pin device. In this example, a 80°C/W reduction was achieved without an increase in board area. If increasing board size is an option, a further 118°C/W reduction could be obtained by utilizing a 1-inch square PCB area.



FIGURE 3. Comparison of SC70-3 and SC70-6 on EVB



FIGURE 4. Comparison of SC70-3 and SC70-6 on 1" Square FR4 PCB

RECOMMENDED MINIMUM PADS FOR SC-70: 6-Lead



Recommended Minimum Pads
Dimensions in Inches/(mm)

[Return to Index](#)



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.