


## Load Switch with Level-Shift

| PRODUCT SUMMARY      |                                  |                    |
|----------------------|----------------------------------|--------------------|
| V <sub>DS2</sub> (V) | R <sub>DS(on)</sub> (Ω)          | I <sub>D</sub> (A) |
| 1.8 to 8             | 0.600 at V <sub>IN</sub> = 4.5 V | ± 0.6              |
|                      | 0.850 at V <sub>IN</sub> = 2.5 V | ± 0.5              |
|                      | 1.200 at V <sub>IN</sub> = 1.8 V | ± 0.2              |

### DESCRIPTION

The Si1867DL includes a p- and n-channel MOSFET in a single SC70-6 package. The low on-resistance p-channel TrenchFET is tailored for use as a load switch. The n-Channel, with an external resistor, can be used as a level-shift to drive the P-Channel load-switch. The n-channel MOSFET has internal ESD protection and can be driven by logic signals as low as 1.5 V. The Si1867DL operates on supply lines from 1.8 V to 8 V, and can drive loads up to 0.6 A.

### APPLICATION CIRCUITS

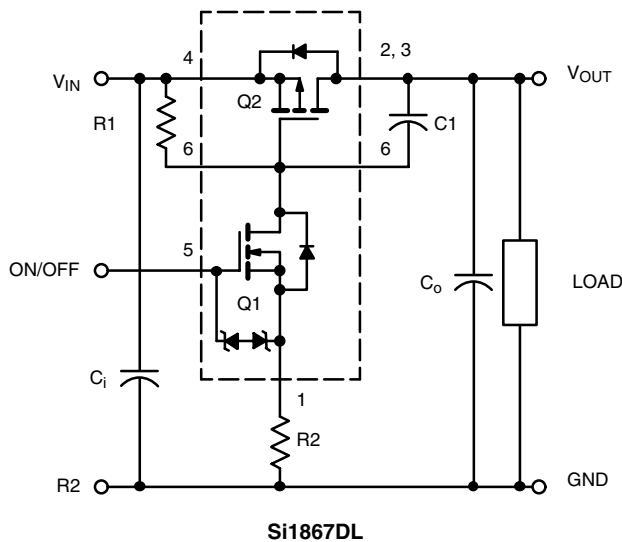

### FEATURES


- Halogen-free According to IEC 61249-2-21 Definition
- TrenchFET® Power MOSFET
- 600 mΩ Low R<sub>DS(on)</sub>
- 1.8 V to 8 V Input
- 1.5 V to 8 V Logic Level Control
- Compliant to RoHS Directive 2002/95/EC



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**  
Available

### APPLICATIONS

- Load Switch with Level-Shift for Portable Applications

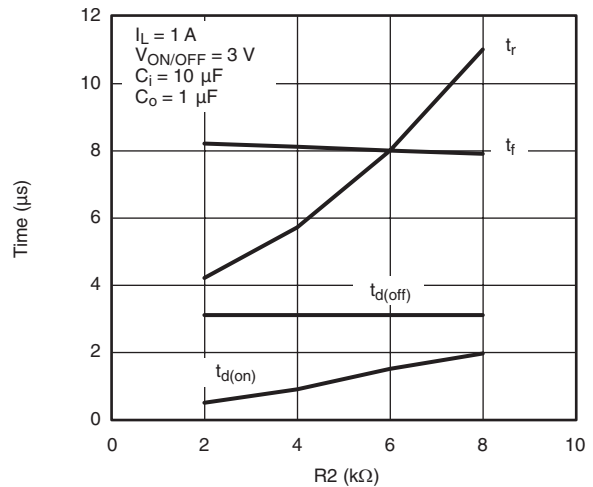

Note: For R2 switching variations with other V<sub>IN</sub>/R1 combinations see Typical Characteristics


**Switching Variation**  
R2 at V<sub>IN</sub> = 2.5 V, R1 = 20 kΩ

| COMPONENTS |                            |                        |
|------------|----------------------------|------------------------|
| R1         | Pull-Up Resistor           | Typical 10 kΩ to 1 mΩ* |
| R2         | Optional Slew-Rate Control | Typical 0 to 100 kΩ*   |
| C1         | Optional Slew-Rate Control | Typical 1000 pF        |

\* Minimum R1 value should be least 10 x R2 to ensure Q1 turn-on.

The Si1867DL is ideally suited for high-side load switching in portable applications. The integrated n-channel level-shift devices saves space by reducing external components. The slew rate is set externally so that rise-times can be tailored to different load types.

## FUNCTIONAL BLOCK DIAGRAM

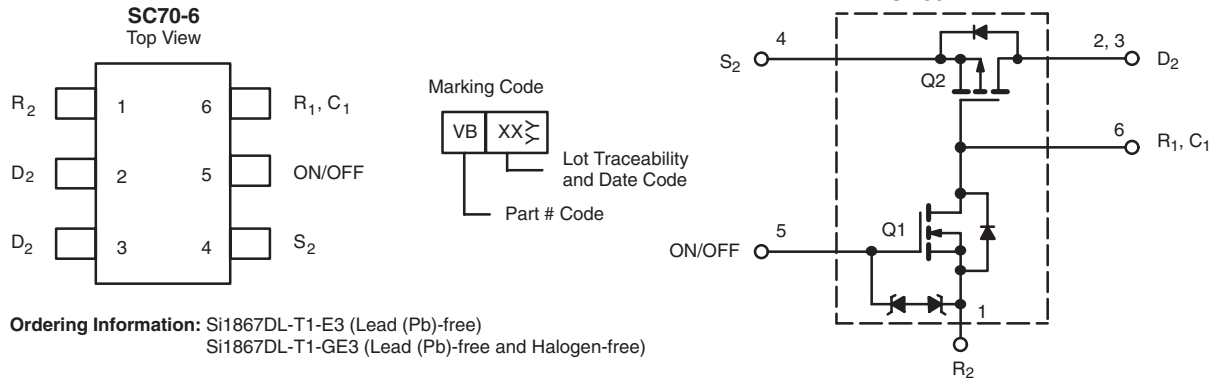

Ordering Information: Si1867DL-T1-E3 (Lead (Pb)-free)  
Si1867DL-T1-GE3 (Lead (Pb)-free and Halogen-free)

| ABSOLUTE MAXIMUM RATINGS $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise noted |                            |             |                  |
|--|----------------------------|-------------|------------------|
| Parameter  | Symbol                     | Limit       | Unit             |
| Input Voltage  | $V_{IN}$                   | 8           | V                |
| ON/OFF Voltage   | $V_{ON/OFF}$               | 8           |                  |
| Load Current   | Continuous <sup>a, b</sup> | $\pm 0.6$   | A                |
|  | Pulsed <sup>b, c</sup>     | $\pm 3$     |                  |
| Continuous Intrinsic Diode Conduction <sup>a</sup>                                 | $I_S$                      | - 0.4       |                  |
| Maximum Power Dissipation <sup>a</sup>   | $P_D$                      | 0.4         | W                |
| Operating Junction and Storage Temperature Range                                   | $T_J, T_{stg}$             | - 55 to 150 | $^\circ\text{C}$ |
| ESD Rating, MIL-STD-883C Human Body Model (100 pF, 1500 $\Omega$ )                 | ESD                        | 2           | kV               |

| THERMAL RESISTANCE RATINGS                                    |            |         |         |                           |
|---|------------|---------|---------|---------------------------|
| Parameter   | Symbol     | Typical | Maximum | Unit                      |
| Maximum Junction-to-Ambient (Continuous Current) <sup>a</sup> | $R_{thJA}$ | 260     | 320     | $^\circ\text{C}/\text{W}$ |
| Maximum Junction-to-Foot (Q2)                                 | $R_{thJF}$ | 190     | 230     |                           |







| SPECIFICATIONS $T_J = 25\text{ }^\circ\text{C}$ unless otherwise noted |              |  |      |       |       |               |
|--|--------------|--|------|-------|-------|---------------|
| Parameter  | Symbol       | Test Conditions  | Min. | Typ.  | Max.  | Unit          |
| <b>OFF Characteristics</b>   |              |  |      |       |       |               |
| Reverse Leakage Current  | $I_{FL}$     | $V_{IN} = 8\text{ V}, V_{ON/OFF} = 0\text{ V}$                                 |      |       | 1     | $\mu\text{A}$ |
| Diode Forward Voltage  | $V_{SD}$     | $I_S = -0.4\text{ A}$  |      | 0.85  | 1.1   | V             |
| <b>ON Characteristics</b>  |              |  |      |       |       |               |
| Input Voltage  | $V_{IN}$     |  | 1.8  |       | 8     | V             |
| On-Resistance (P-Channel) at 1 A                                       | $R_{DS(on)}$ | $V_{ON/OFF} = 1.5\text{ V}, V_{IN} = 4.5\text{ V}, I_D = 0.6\text{ A}$         |      | 0.480 | 0.600 | $\Omega$      |
|  |              | $V_{ON/OFF} = 1.5\text{ V}, V_{IN} = 2.5\text{ V}, I_D = 0.5\text{ A}$         |      | 0.690 | 0.850 |               |
|  |              | $V_{ON/OFF} = 1.5\text{ V}, V_{IN} = 1.8\text{ V}, I_D = 0.2\text{ A}$         |      | 0.950 | 1.200 |               |
| On-State (P-Channel) Drain-Current                                     | $I_{D(on)}$  | $V_{IN-OUT} \leq 0.2\text{ V}, V_{IN} = 5\text{ V}, V_{ON/OFF} = 1.5\text{ V}$ | 1    |       |       | A             |
|  |              | $V_{IN-OUT} \leq 0.3\text{ V}, V_{IN} = 3\text{ V}, V_{ON/OFF} = 1.5\text{ V}$ | 1    |       |       |               |

Notes:


- a) Surface mounted on FR4 board.
- b)  $V_{IN} = 8\text{ V}, V_{ON/OFF} = 8\text{ V}, T_A = 25\text{ }^\circ\text{C}$ .
- c) Pulse test; pulse width  $\leq 300\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$ .

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


**TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted

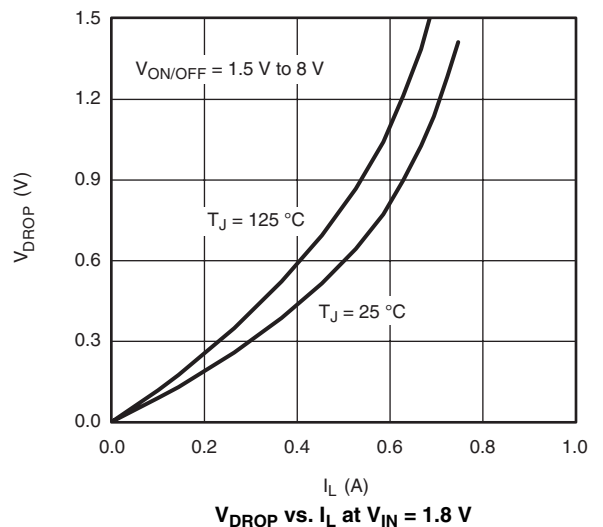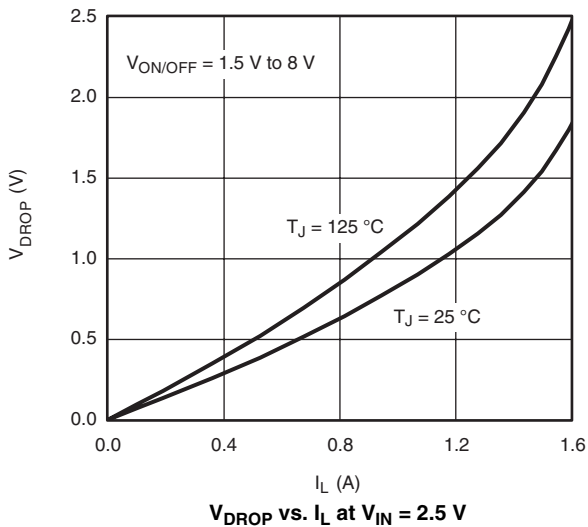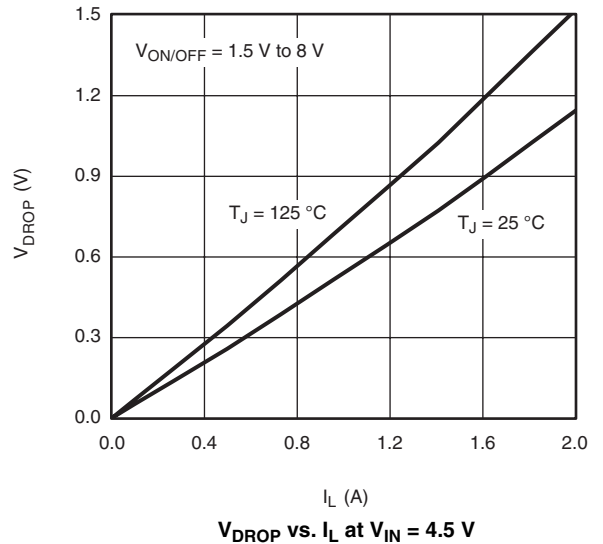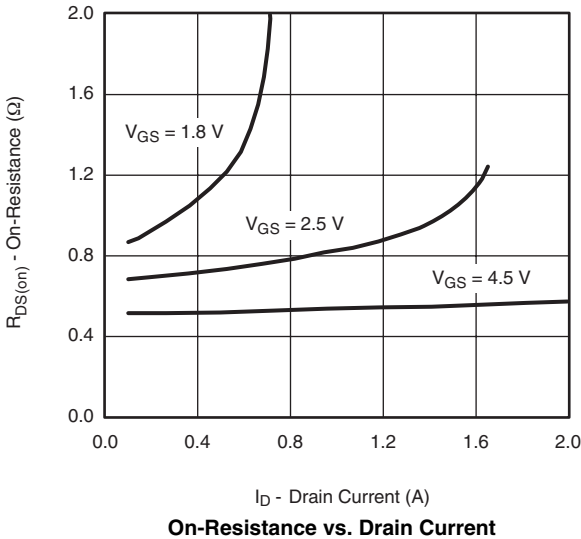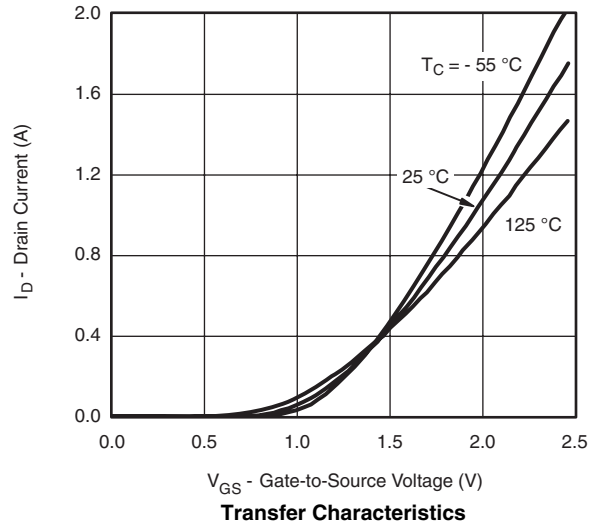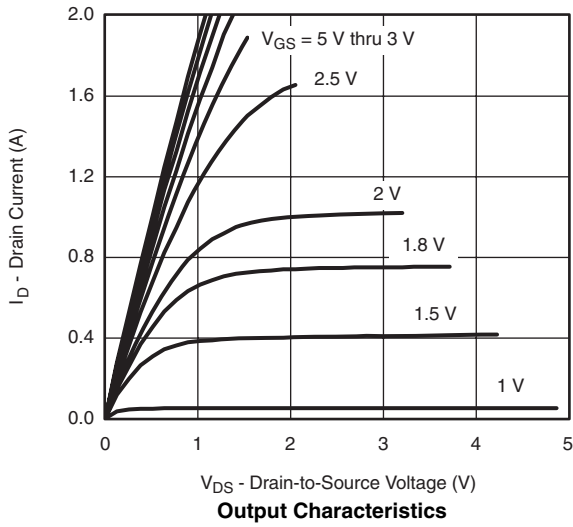


**TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted

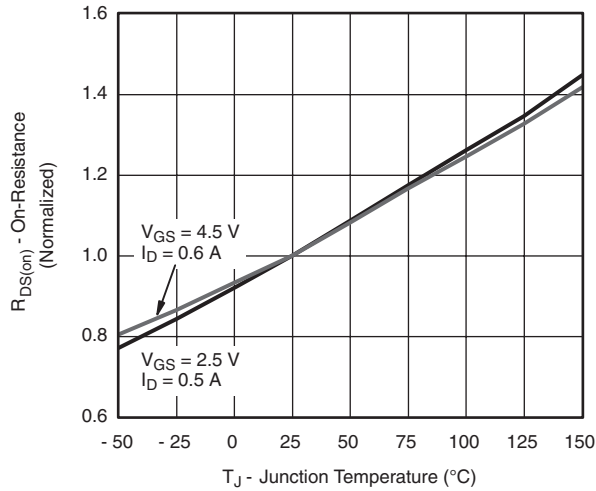


**On Resistance vs. Junction Temperature**

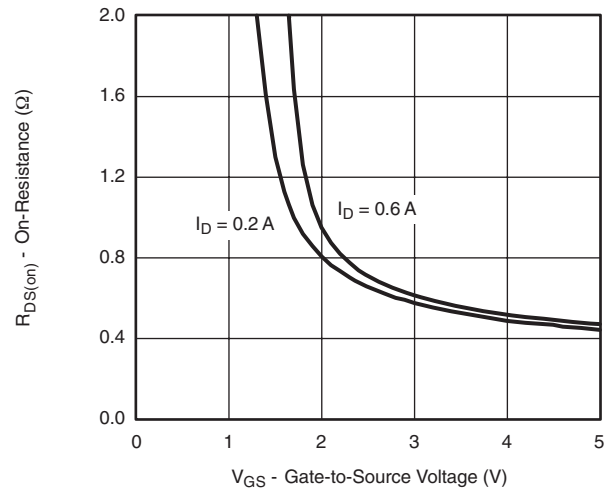


**On-Resistance vs. Gate-to-Source Voltage**

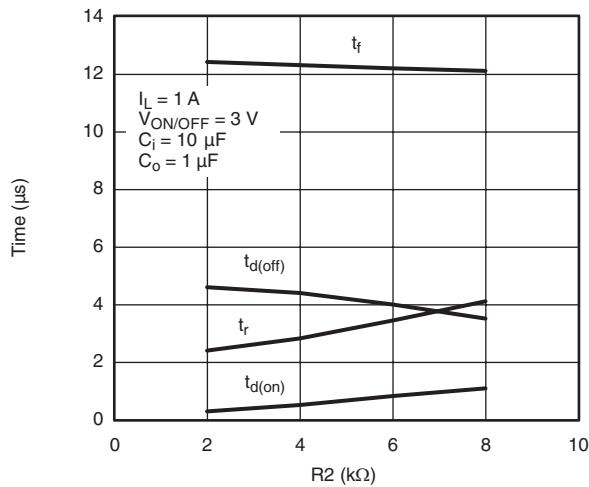


**Switching Variation  
R2 at V<sub>IN</sub> = 4.5 V, R1 = 20 kΩ**

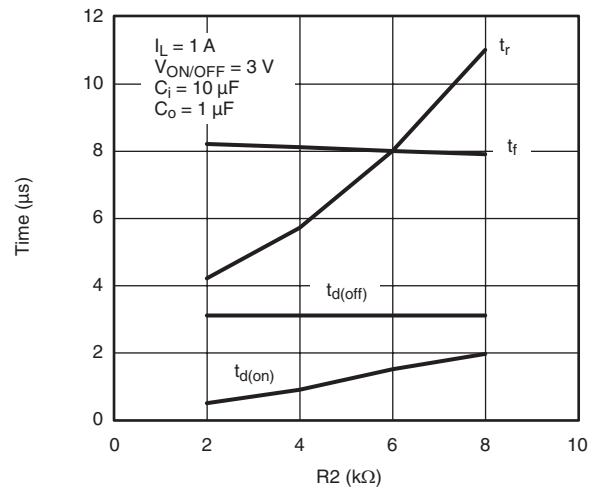

**Switching Variation  
R2 at V<sub>IN</sub> = 2.5 V, R1 = 20 kΩ**

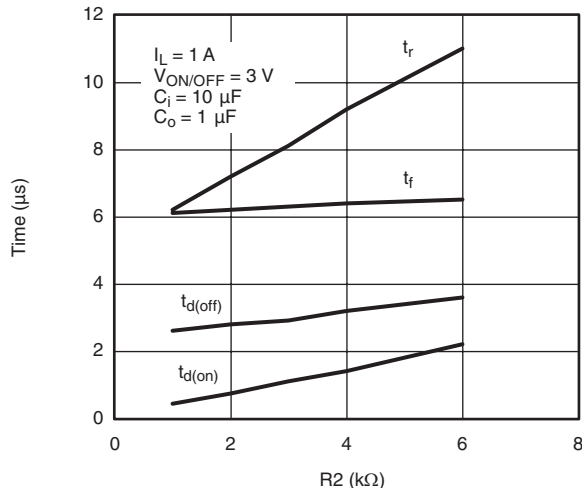


**Switching Variation  
R2 at V<sub>IN</sub> = 1.8 V, R1 = 20 kΩ**

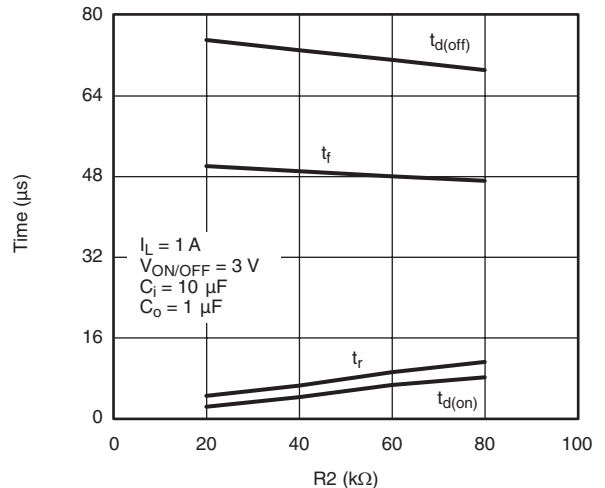


**Switching Variation  
R2 at V<sub>IN</sub> = 4.5 V, R1 = 300 kΩ**


## TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

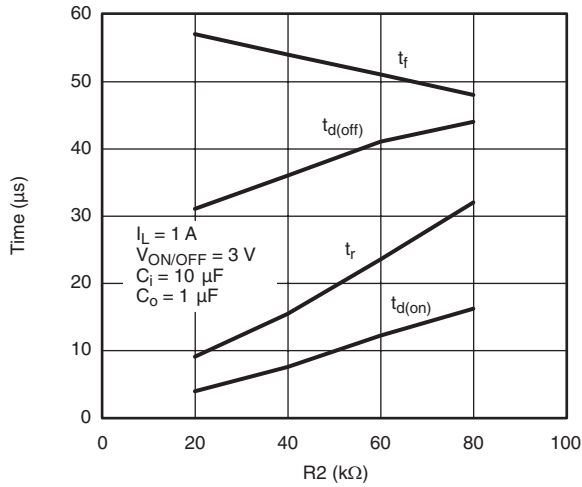


**Switching Variation**  
 $R_2$  at  $V_{\text{IN}} = 2.5 \text{ V}$ ,  $R_1 = 300 \text{ k}\Omega$

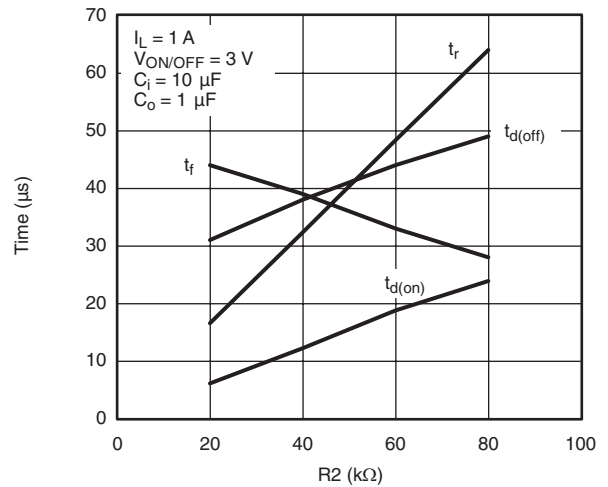

**Switching Variation**  
 $R_2$  at  $V_{\text{IN}} = 1.8 \text{ V}$ ,  $R_1 = 300 \text{ k}\Omega$

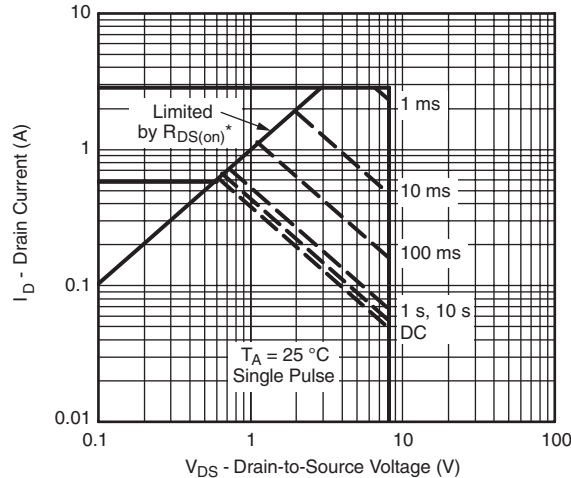

\*  $V_{\text{GS}} >$  minimum  $V_{\text{GS}}$  at which  $R_{\text{DS(on)}}$  is specified  
**Safe Operating Area, Junction-to-Ambient**

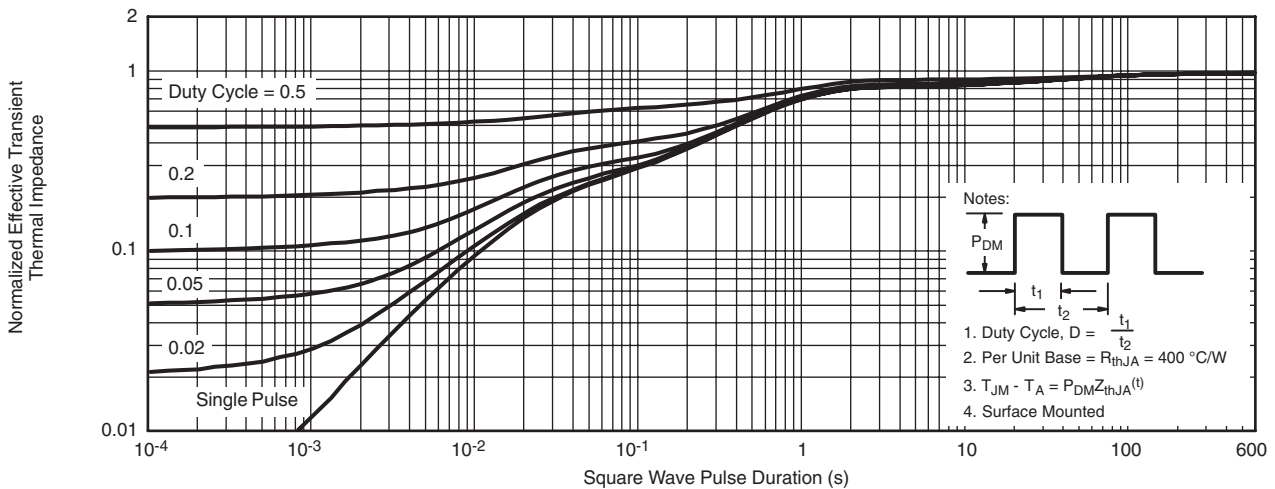

**Normalized Thermal Transient Impedance, Junction-to-Ambient**

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see [www.vishay.com/ppg?72534](http://www.vishay.com/ppg?72534).



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.