

Top View

## Common Drain Dual N-Channel 30 V (S1-S2) MOSFET


# 

PRODUCT SUMMARY					
V <sub>S1S2</sub> (V)	30				
$R_{S1S2(on)}$ max. ( $\Omega$ ) at $V_{GS} = 10 \text{ V}$	0.0040				
$R_{S1S2(on)}$ max. ( $\Omega$ ) at $V_{GS} = 4.5 \text{ V}$	0.0060				
Q <sub>g</sub> typ. (nC) <sup>g</sup>	19				
I <sub>S1S2</sub> (A) <sup>a</sup>	108				
Configuration	Common drain				

**Bottom View** 

#### **FEATURES**

- TrenchFET® Gen IV power MOSFET
- Very low source-to-source on resistance






- 100 % R<sub>g</sub> and UIS tested
- · Optimizes circuit layout for bi-directional current flow
- Material categorization: for definitions of compliance please see <a href="https://www.vishay.com/doc?99912">www.vishay.com/doc?99912</a>

#### **APPLICATIONS**

- · Battery protection switch
- Bi-directional switch
- · Load switch



ORDERING INFORMATION	
Package	PowerPAK 1212-8SCD
Lead (Pb)-free and halogen-free	SiSF04DN-T1-GE3

PARAMETER		SYMBOL	LIMIT	UNIT	
Drain-source voltage		V <sub>S1S2</sub>	30	V	
Gate-source voltage		V <sub>GS</sub>	+16 / -12	V	
Continuous drain current (T <sub>J</sub> = 150 °C)	T <sub>C</sub> = 25 °C		108		
	T <sub>C</sub> = 70 °C	1. —	86		
	T <sub>A</sub> = 25 °C	I <sub>S1S2</sub>	30 b, c	Α	
	T <sub>A</sub> = 70 °C	1	24 <sup>b, c</sup>		
Pulsed drain current (t = 100 μs)		I <sub>S1S2M</sub>	190		
	T <sub>C</sub> = 25 °C		69.4		
Maximum power dissipation	T <sub>C</sub> = 70 °C		44.4	14/	
	T <sub>A</sub> = 25 °C	P <sub>D</sub>	5.2 <sup>b, c</sup>	W	
	T <sub>A</sub> = 70 °C	1	3.3 b, c		
Operating junction and storage temperature range		T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C	
Soldering recommendations (peak temperature) c			260		

THERMAL RESISTANCE RATI	NGS				
PARAMETER		SYMBOL	TYPICAL	MAXIMUM	UNIT
Maximum junction-to-ambient b	t ≤ 10 s	R <sub>thJA</sub>	19	24	°C/W
Maximum junction-to-case (drain)	Steady state	R <sub>thJC</sub>	1.4	1.8	C/VV

#### **Notes**

- a.  $T_C = 25 \,^{\circ}C$
- b. Surface mounted on 1" x 1" FR4 board
- c. t = 10 s
- d. See solder profile (<u>www.vishay.com/doc?73257</u>). The PowerPAK 1212-8SCD is a leadless package. The end of the lead terminal is exposed copper (not plated) as a result of the singulation process in manufacturing. A solder fillet at the exposed copper tip cannot be guaranteed and is not required to ensure adequate bottom side solder interconnection
- e. Rework conditions: manual soldering with a soldering iron is not recommended for leadless components
- f. Maximum under steady state conditions is 63 °C/W
- g. Single MOSFET

# Vishay Siliconix


PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Static						
Drain-source breakdown voltage	$V_{DS}$	$V_{GS} = 0 \text{ V}, I_D = 250 \mu\text{A}$	30	-	-	V
Gate-source threshold voltage	V <sub>GS(th)</sub>	$V_{S1S2} = V_{GS}, I_D = 250 \mu A$	1	-	2.3	ľ
Gate-source leakage	I <sub>GSS</sub>	$V_{S1S2} = 0 \text{ V}, V_{GS} = +16 \text{ V} / -12 \text{ V}$	-	-	± 100	nA
Zara mata walta na aluain awarant	I <sub>DSS</sub>	V <sub>S1S2</sub> = 30 V, V <sub>GS</sub> = 0 V	-	-	1	μΑ
Zero gate voltage drain current		V <sub>S1S2</sub> = 30 V, V <sub>GS</sub> = 0 V, T <sub>J</sub> = 70 °C	-	-	15	
On-state drain current <sup>a</sup>	I <sub>S1S2(on)</sub>	$V_{S1S2} \ge 10 \text{ V}, V_{GS} = 10 \text{ V}$	20	-	-	Α
Delice and a selection of the selection	_	V <sub>GS</sub> = 10 V, I <sub>S1S2</sub> = 7 A	-	0.0030	0.0040	
Drain-source on-state resistance <sup>a</sup>	R <sub>S1S2(on)</sub>	V <sub>GS</sub> = 4.5 V, I <sub>S1S2</sub> = 5 A	-	0.0043	0.0060	Ω
Forward transconductance a	9 <sub>fs</sub>	V <sub>S1S2</sub> = 10 V, I <sub>S1S2</sub> = 35 A	-	115	-	S
Dynamic <sup>b, c</sup>					•	·
Input capacitance	C <sub>iss</sub>		-	2600	-	
Output capacitance	Coss	$V_{DS} = 15 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ MHz}$	-	1100	-	рF
Reverse transfer capacitance	C <sub>rss</sub>		-	65	-	'
		V <sub>DS</sub> = 15 V, V <sub>GS</sub> = 10 V, I <sub>D</sub> =5 A	-	40	60	
Total gate charge	$Q_g$		-	19	29	
Gate-source charge	$Q_{qs}$	$V_{DS} = 10 \text{ V}, V_{GS} = 4.5 \text{ V}, I_D = 5 \text{ A}$	-	7.2	-	nC
Gate-drain charge	$Q_{qd}$		-	4.7	-	
Gate resistance	$R_g$	f = 1 MHz	0.2	1.1	2.2	Ω
Turn-on delay time	t <sub>d(on)</sub>		-	12	25	
Rise time	t <sub>r</sub>	$V_{DD} = 15 \text{ V. R}_1 = 3 \Omega. \text{ less} \approx 5 \text{ A}.$	-	21	40	
Turn-off delay time	t <sub>d(off)</sub>	$V_{DD} = 15 \text{ V}, R_L = 3 \Omega, I_{S1S2} \cong 5 \text{ A},$ $V_{GEN} = 10 \text{ V}, R_g = 1 \Omega$		30	60	
Fall time	t <sub>f</sub>		-	6	15	
Turn-on delay time	t <sub>d(on)</sub>		-	25	50	ns
Rise time	t <sub>r</sub>	$V_{DD} = 15 \text{ V}, R_{I} = 3 \Omega, I_{D} \cong 5 \text{ A},$	-	50	100	
Turn-off delay time	t <sub>d(off)</sub>	$V_{GEN} = 4.5 \text{ V}, R_g = 1 \Omega$	-	32	60	
Fall time	t <sub>f</sub>		-	17	35	1
<b>Drain-Source Body Diode Characteristi</b>	cs <sup>c</sup>		1		•	<u> </u>
Continuous source-drain diode current	I <sub>S1S2</sub>	T <sub>C</sub> = 25 °C	-	-	60	
Pulse diode forward current	I <sub>S1S2M</sub>	-	-	-	190	A
Body diode reverse recovery time	t <sub>rr</sub>		-	37	75	ns
Body diode reverse recovery charge	Q <sub>rr</sub>	$I_F = 5 \text{ A, di/dt} = 100 \text{ A/µs,}$	_	28	60	nC
Reverse recovery fall time	t <sub>a</sub>	$T_J = 25 ^{\circ}\text{C}$	-	20	-	
Reverse recovery rise time	t <sub>b</sub>		_	17	_	ns

#### **Notes**


- a. Pulse test; pulse width  $\leq 300~\mu\text{s},$  duty cycle  $\leq 2~\%$
- b. Guaranteed by design, not subject to production testing
- c. On single MOSFET


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.






**Output Characteristics** 







On-Resistance vs. Source Current and Gate Voltage




Capacitance






On-Resistance vs. Junction Temperature







Source-Drain Diode Forward Voltage



On-Resistance vs. Gate-to-Source Voltage




Threshold Voltage





Single Pulse Power, Junction-to-Ambient





Safe Operating Area, Junction-to-Ambient






Power, Junction-to-Case


#### Notes

- a.  $V_{GS}$  > minimum  $V_{GS}$  at which  $R_{DS(on)}$  is specified
- b. The power dissipation P<sub>D</sub> is based on T<sub>J</sub> max. = 150 °C, using junction-to-case thermal resistance, and is more useful in settling the upper dissipation limit for cases where additional heatsinking is used. It is used to determine the current rating, when this rating falls below the package limit



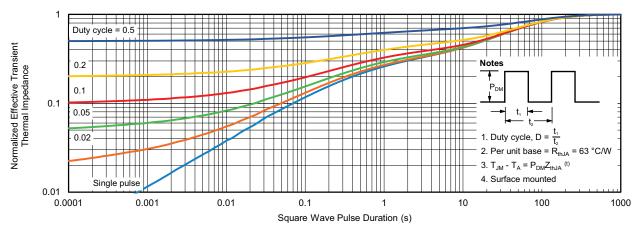

Normalized Thermal Transient Impedance, Junction-to-Ambient

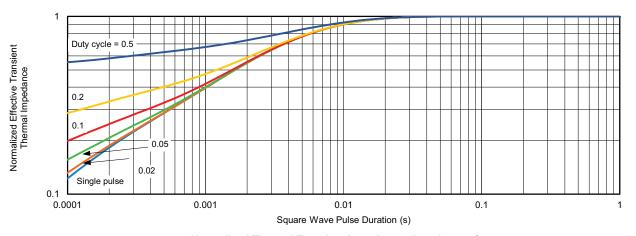


Normalized Thermal Transient Impedance, Junction-to-Case

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package / tape drawings, part marking, and reliability data, see <a href="https://www.vishay.com/ppg?77230">www.vishay.com/ppg?77230</a>.



Vishay Siliconix

# PowerPAK® 1212-8S CD with Flip Chip

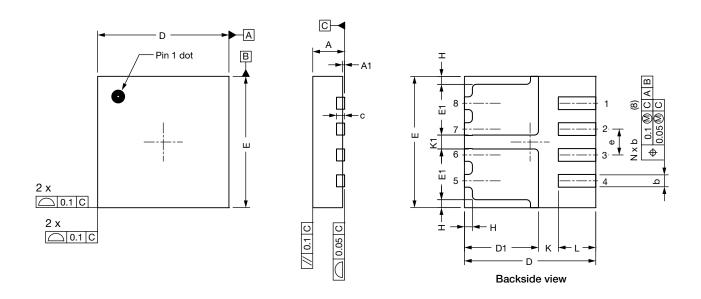


DIM.	MILLIMETERS			INCHES			
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	
Α	0.70	0.75	0.80	0.027	0.029	0.031	
A1	0	0.02	0.05	0	0.001	0.002	
b	0.27	0.32	0.37	0.011	0.013	0.015	
С	-	0.20 ref.	-	-	0.008 ref.	-	
D	3.20	3.30	3.40	0.126	0.130	0.134	
D1	1.76	1.86	1.96	0.069	0.073	0.077	
E	3.20	3.30	3.40	0.126	0.130	0.134	
E1	1.18	1.28	1.38	0.046	0.050	0.054	
е	0.60	0.65	0.70	0.024	0.026	0.028	
K		0.50 typ.			0.020 typ.		
K1	0.35 typ.				0.014 typ.		
Н	0.10	0.20	0.30	0.006	0.008	0.010	
L	0.84	0.94	1.04	0.033	0.037	0.041	

DWG: 6061



# Recommended Land Pattern PowerPAK® 1212-8S CD

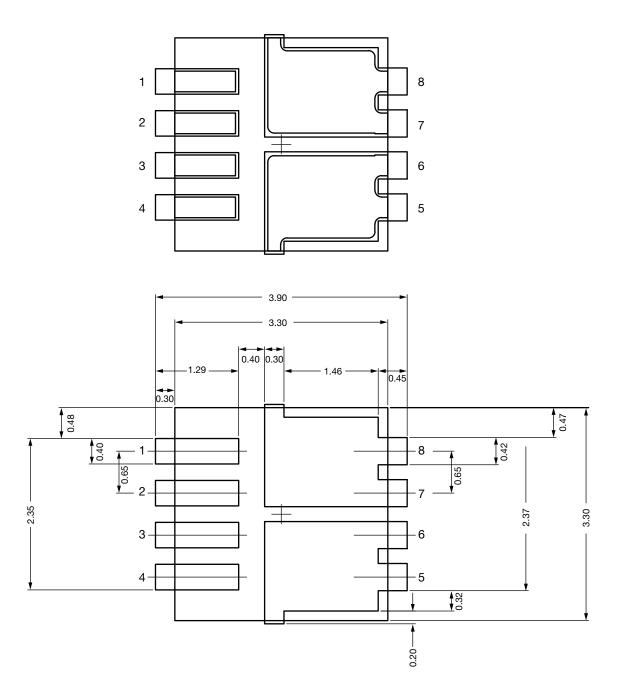



### **Legal Disclaimer Notice**

Vishay

#### **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.