

IR Receiver Modules for Remote Control Systems



LINKS TO ADDITIONAL RESOURCES









DESCRIPTION

The TSOP99...TR1 series devices are the latest generation miniaturized IR receiver modules for infrared remote control systems. These series provide improvements in sensitivity to remote control signals in dark ambient as well as in sensitivity in the presence of optical disturbances e.g. from CFLs.

The devices contain a PIN diode and a preamplifier assembled on a lead frame. The epoxy package contains an IR filter. The demodulated output signal can be directly connected to a microprocessor for decoding.

The TSOP996..TR1 series devices are designed to receive long burst codes (10 or more carrier cycles per burst). The third digit designates the AGC level (AGC6) and the last two digits designate the band-pass frequency (see table below). The higher the AGC, the better noise is suppressed, but the lower the code compatibility. AGC6 provides maximized noise suppression. Generally, we advise to select the highest AGC that satisfactorily receives the desired remote code.

These components have not been qualified to automotive specifications.

FEATURES

- · Improved dark sensitivity
- · Improved immunity against optical noise
- Very low supply current
- Photo detector and preamplifier in one package
- Internal filter for PCM frequency
- Supply voltage: 2.0 V to 3.6 V
- Insensitive to supply voltage ripple and noise
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912





RoHS
COMPLIANT
HALOGEN
FREE
GREEN
(5-2008)

DESIGN SUPPORT TOOLS

- 3D models
- Window size calculator
- PCB layout guidelines

MECHANICAL DATA


1, 4 = GND, $2 = V_S$, 3 = OUT

ORDERING CODE


Taping:

TSOP99...TR1 - top view taped, 2000 pcs/reel

BLOCK DIAGRAM



APPLICATION CIRCUIT



 R_1 and C_1 recommended to reduce supply ripple for $V_S < 2.2 \text{ V}$



PARTS TA	BLE	
AGC		MAXIMIZED NOISE SUPPRESSION (AGC6)
	30 kHz	TSOP99630TR1
	33 kHz	TSOP99633TR1
Carrier	36 kHz	TSOP99636TR1 (5)(6)
frequency	38 kHz	TSOP99638TR1 (3)(4)(11)
	40 kHz	TSOP99640TR1
	56 kHz	TSOP99656TR1
Package		TVCastSMD
Pinning		1, 4 = GND, 2 = V _S , 3 = OUT
Dimensions (mm)	6.8 W x 2.6 H x 5.3 D
Mounting		SMD
Application		Remote control
Best choice f	or	(1) Cisco (2) MCIR (3) Mitsubishi (4) NEC (5) Panasonic (6) RC-5 (7) RC-6 (8) RCA (9) r-step (10) Sejin 4PPM (11) Sharp (12) Sony

Notes

- 30 kHz and 33 kHz only available on written request
- See datasheet for TSOP992..TR1, TSOP994..TR1 for preferred devices for (1)(2)(7)(8)(9)(10)(12)

ABSOLUTE MAXIMUM RATI	NGS			
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Supply voltage		V _S	-0.3 to +3.6	V
Supply current		I _S	3	mA
Output voltage		Vo	-0.3 to (V _S + 0.3)	V
Output current		I _O	5	mA
Junction temperature		T _j	100	°C
Storage temperature range		T _{stg}	-25 to +85	°C
Operating temperature range		T _{amb}	-25 to +85	°C
Power consumption	T _{amb} ≤ 85 °C	P _{tot}	10	mW

Note

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only
and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification
is not implied. Exposure to absolute maximum rating conditions for extended periods may affect the device reliability

ELECTRICAL AND OPTIC	CAL CHARACTERISTICS (T _{amb} = 2	5 °C, unles	s otherwi	se specif	fied)	
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply current	$E_{v} = 0, V_{S} = 3.3 V$	I _{SD}	0.25	0.37	0.45	mA
Supply current	$E_v = 40 \text{ klx, sunlight}$	I _{SH}	ı	0.50	-	mA
Supply voltage		Vs	2.0	-	3.6	V
Transmission distance	E_v = 0, test signal see Fig. 1, IR diode TSAL6200, I_F = 50 mA	d	-	30	-	m
Output voltage low	I_{OSL} = 0.5 mA, E_{e} = 0.7 mW/m ² , test signal see Fig. 1	V _{OSL}	-	-	100	mV
Minimum irradiance	Test signal: NEC code	E _{e min.}	1	0.08	0.15	mW/m ²
Maximum irradiance	t_{pi} - 5/f ₀ < t_{po} < t_{pi} + 6/f ₀ , test signal see Fig. 1	E _{e max.}	30	-	-	W/m ²
Directivity	Angle of half transmission distance	Ψ1/2	-	± 45	-	0

TYPICAL CHARACTERISTICS (T_{amb} = 25 °C, unless otherwise specified)




Fig. 1 - Output Delay and Pulse-Width





Fig. 2 - Pulse-Width vs. Irradiance in Dark Ambient






Fig. 4 - Pulse-Width vs. Irradiance in Dark Ambient




Fig. 5 - Frequency Dependence of Responsivity




Fig. 6 - Sensitivity in Bright Ambient






Fig. 7 - Sensitivity vs. Supply Voltage Disturbances




Fig. 8 - Minimum Burst Repetition Time vs. Burst Length




Fig. 9 - Sensitivity vs. Ambient Temperature





Fig. 10 - Relative Spectral Sensitivity vs. Wavelength






Fig. 11 - Horizontal and Vertical Directivity




Fig. 12 - Sensitivity vs. Supply Voltage

SUITABLE DATA FORMAT

This series is designed to suppress spurious output pulses due to noise or disturbance signals. The devices can distinguish data signals from noise due to differences in frequency, burst length, and envelope duty cycle. The data signal should be close to the device's band-pass center frequency (e.g. 38 kHz) and fulfill the conditions in the table below.

When a data signal is applied to the product in the presence of a disturbance, the sensitivity of the receiver is automatically reduced by the AGC to insure that no spurious pulses are present at the receiver's output. Some examples which are suppressed are:

- DC light (e.g. from tungsten bulbs sunlight)
- · Continuous signals at any frequency
- Strongly or weakly modulated patterns from fluorescent lamps with electronic ballasts (see Fig. 13 or Fig. 14)




Fig. 13 - IR Emission from Fluorescent Lamp With Low Modulation





Fig. 14 - IR Emission from Fluorescent Lamp With High Modulation

	TSOP996TR1
Minimum burst length	10 cycles/burst
Minimum gap time between bursts	≥ 13 cycles
Minimum idle period between data frames	12 ms
RC-5 code	Preferred
RC-6 code	Yes
NEC code	Preferred
r-step code 56 kHz	Yes
Sony code	No
RCA 56 kHz code	Yes
Mitsubishi code 38 kHz	Preferred
Suppression of interference from fluorescent lamps	Fig. 13 and Fig. 14

Note


• For data formats with short bursts please see the datasheet for TSOP993..TR1, TSOP995..TR1

PACKAGE DIMENSIONS in millimeters

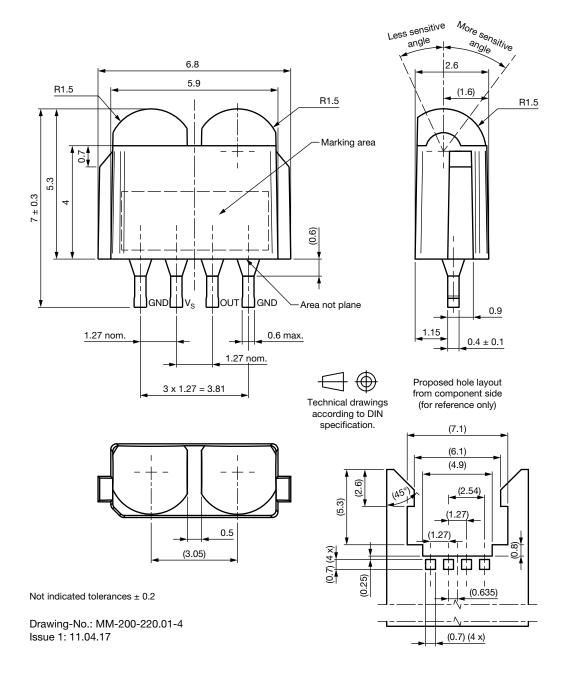




VISHAY LEAD (Pb)-FREE REFLOW SOLDER PROFILE



TAPING VERSION TSOP..TR1 DIMENSIONS in millimeters

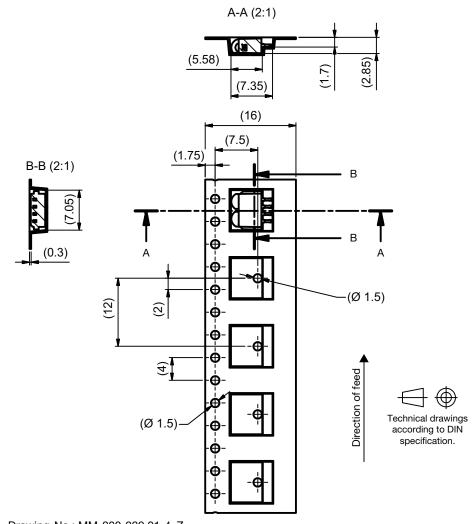


Drawing-No.: MM-200-229.01-4_Z


Issue A: 24.04.17

REEL DIMENSIONS in millimeters

Packing quantity - 2000 pieces per reel

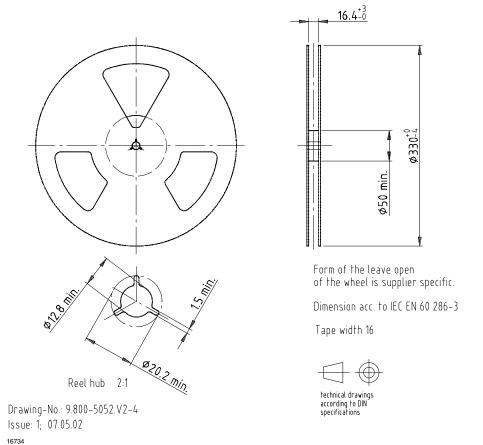


LEADER AND TRAILER DIMENSIONS in millimeters

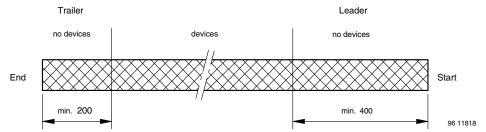



OUTER PACKAGING

The sealed reel is packed into a pizza box.

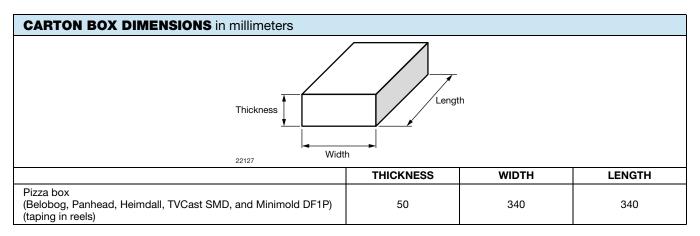

COVER TAPE PEEL STRENGTH

According to DIN EN 60286-3 0.1 N to 1.3 N 300 ± 10 mm/min. 165° to 180° peel angle

LABEL

Standard bar code labels for finished goods


The standard bar code labels are product labels and used for identification of goods. The finished goods are packed in final packing area. The standard packing units are labeled with standard bar code labels before transported as finished goods to warehouses. The labels are on each packing unit and contain Vishay Semiconductor GmbH specific data.

em-description	18 8 3 10 3 (YWW) 2 8 - -
election-code SEL DT-/serial-number BATCH ata-code COD ant-code PTC uantity QTY ccepted by ACC acked by PCK ixed code indicator rigin TYPE sm-number N	3 10 3 (YWW) 2 8 - -
DT-/serial-number ata-code ant-code pTC uantity coepted by ACC acked by pCK ixed code indicator rigin AXXXXXXX+ DNG BAR CODE TOP pTC ACC MIXED CODE TYPE pm-number N	10 3 (YWW) 2 8 - -
ata-code COD ant-code PTC Juantity QTY Excepted by ACC acked by PCK Exed code indicator MIXED CODE Figin XXXXXXX+ DNG BAR CODE TOP Em-number N	3 (YWW) 2 8
ant-code PTC uantity QTY coepted by ACC acked by PCK ixed code indicator MIXED CODE rigin XXXXXXX+ DNG BAR CODE TOP TYPE em-number N	2 8 - - -
coepted by ACC acked by PCK ixed code indicator MIXED CODE rigin XXXXXXX+ DNG BAR CODE TOP TYPE em-number N	8 - - -
ccepted by ACC acked by PCK ixed code indicator MIXED CODE rigin xxxxxxx+ DNG BAR CODE TOP TYPE em-number N	- - -
ixed code indicator MIXED CODE rigin xxxxxxxx+ DNG BAR CODE TOP rm-number N	-
ixed code indicator MIXED CODE rigin xxxxxxx+ DNG BAR CODE TOP rm-number N	-
rigin xxxxxxx+ DNG BAR CODE TOP TYPE em-number N	
DNG BAR CODE TOP TYPE em-number N	Company logo
em-number N	Company logo
	LENGTH
ant-code N	8
ant code	2
equence-number X	3
uantity N	8
otal length -	21
HORT BAR CODE BOTTOM TYPE	LENGTH
election-code X	3
ata-code N	3
atch-number X	10
ter -	1
otal length -	17



DRY PACKING

The reel is packed in an anti-humidity bag to protect the devices from absorbing moisture during transportation and storage.



FINAL PACKING

The sealed reel is packed into a cardboard box.

RECOMMENDED METHOD OF STORAGE

Dry box storage is recommended as soon as the aluminum bag has been opened to prevent moisture absorption. The following conditions should be observed, if dry boxes are not available:

- Storage temperature 10 °C to 30 °C
- Storage humidity ≤ 60 % RH max.

After more than 72 h under these conditions moisture content will be too high for reflow soldering.


In case of moisture absorption, the devices will recover to the former condition by drying under the following condition:

192 h at $40 \,^{\circ}\text{C} + 5 \,^{\circ}\text{C}$ / - $0 \,^{\circ}\text{C}$ and < $5 \,^{\circ}\text{M}$ RH (dry air / nitrogen) or 96 h at $60 \,^{\circ}\text{C} + 5 \,^{\circ}\text{C}$ and < $5 \,^{\circ}\text{M}$ RH for all device containers

or

24 h at 125 °C + 5 °C not suitable for reel or tubes.

An EIA JEDEC® standard J-STD-020 level 4 label is included on all dry bags.



22522


EIA JEDEC standard J-STD-020 level 4 label is included on all dry bags

ESD PRECAUTION

Proper storage and handling procedures should be followed to prevent ESD damage to the devices especially when they are removed from the antistatic shielding bag. Electrostatic sensitive devices warning labels are on the packaging.

VISHAY SEMICONDUCTORS STANDARD BAR CODE LABELS

The Vishay Semiconductors standard bar code labels are printed at final packing areas. The labels are on each packing unit and contain Vishay Semiconductors specific data.





Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.