


SMA, SMB, SMC

TAPE INFORMATION in inches (millimeters)

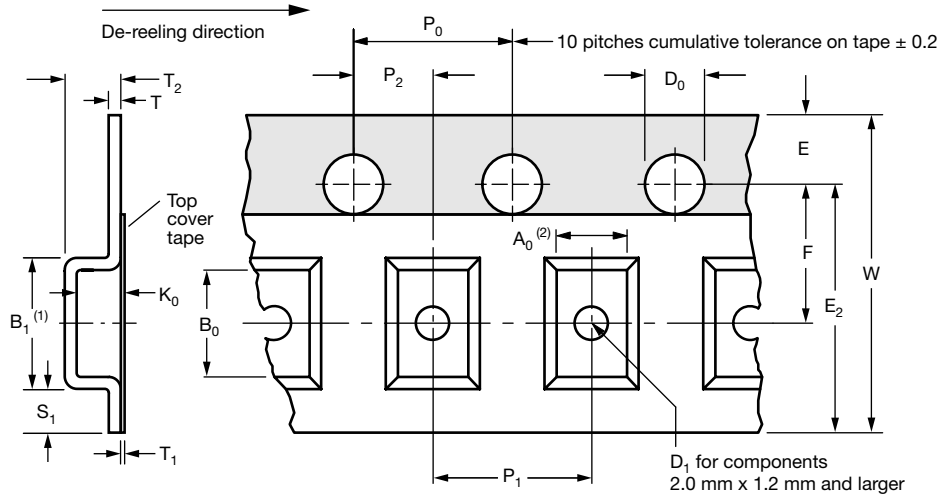

Notes


- (1) For machine reference only, including draft and radii concentric around B_0
- (2) See Note 1 and table

CASE TYPE	TAPESIZE W	E	F	D_0	P_0	P_1	P_2	A_0, B_0, C_0	B_1 MAX.	D_1 MIN.	E_2 MIN.	T_2 MAX.
FSMA	0.472 (12)	0.1 (1.8)	0.2 (5.5)	0.1 (1.5)	0.2 (4)	0.2 (4)	0.1 (2)	See Note 1	0.3 (8.2)	0.1 (1.5)	0.4 (10)	0.1 (2.5)
FSMB												0.1 (2.7)
FSMC	0.63 (16)		0.3 (7.5)			0.3 (8)			0.5 (12)		0.6 (14)	0.1 (2.5)

Notes

- (1) A_0 , B_0 , and K_0 are determined by the maximum dimensions of the component size. The clearance between the component and the cavity must be within 0.05 mm (0.002") min. to 0.5 mm (0.02") max. for 8 mm tape and 12 mm tape, 0.15 mm (0.066") min. to 0.90 mm (0.035") max. for 16 mm tape and 0.15 mm (0.006") min. to 1.0 mm (0.59") max. for 24 mm tape.
- (2) All surface mount components are packed in accordance with EIA standard 481-C.

REEL INFORMATION in inches (millimeters)

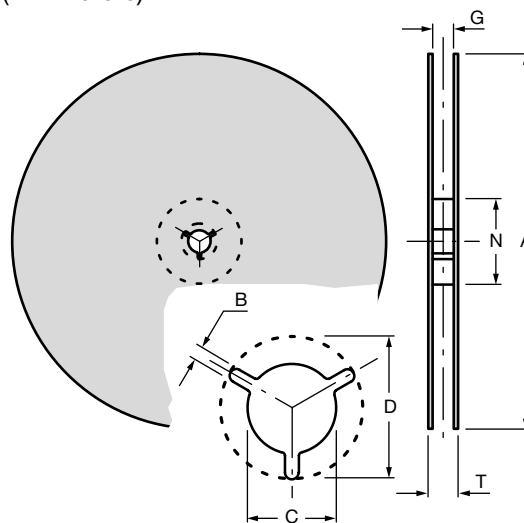

CASE TYPE	A	B	C	D	N	G	T
FSMC	13 (330)	0.1 (2.5)	0.51 (13)	0.86 (21.8)	3.11 (79)	0.72 (18.4)	0.92 (23.4)
FSMA, FSMB						0.57 (14.4)	0.76 (19.4)