


## Surface Mount Multilayer Ceramic Chip Capacitors for Safety Certified Applications

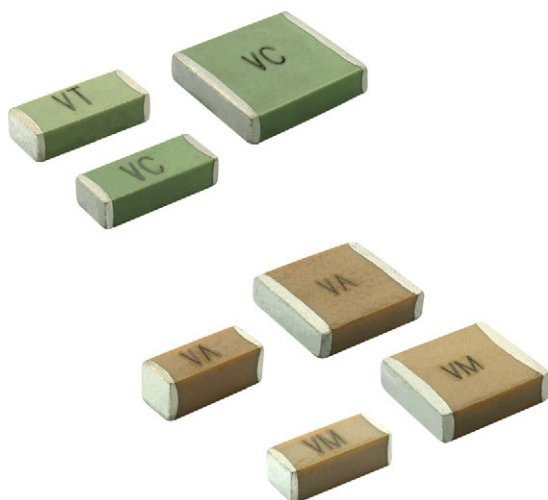

### LINKS TO ADDITIONAL RESOURCES


[Packages](#)

[Technical Notes](#)

[Related Documents](#)

[Calculators](#)

### ELECTRICAL SPECIFICATIONS

#### Note

- Electrical characteristics at +25 °C unless otherwise specified

**Operating Temperature:** -55 °C to +125 °C

**Capacitance Range X1 / Y2 <sup>(1)</sup>:**

C0G (NP0): 10 pF to 1.0 nF

X7R: 100 pF to 4.7 nF

**Capacitance Range X2 <sup>(1)</sup>:**

C0G (NP0): 10 pF to 390 pF

X7R: 100 pF to 12 nF

**Voltage Range:** 250 V<sub>AC</sub>

**Temperature Coefficient of Capacitance (TCC):**

C0G (NP0): 0 ppm/°C ± 30 ppm/°C from -55 °C to +125 °C

X7R: ± 15 % from -55 °C to +125 °C, with 0 V<sub>DC</sub> applied

**Dissipation Factor (DF) <sup>(1)</sup>:**

C0G (NP0): 0.1 % maximum

X7R: 2.5 % maximum

**Insulating Resistance:**

at +25 °C 100 000 MΩ min. or 1000 ΩF whichever is less

at +125 °C 10 000 MΩ min. or 100 ΩF whichever is less

#### Note

<sup>(1)</sup> Test conditions per IEC 60384-14:

C0G (NP0): 1.0 V<sub>RMS</sub> at 1 MHz

X7R: 1.0 V<sub>RMS</sub> at 1 kHz

### FEATURES

- Approved IEC 60384-14
- Specialty: safety certified capacitors
- AEC-Q200 qualified available with PPAP
- Wet build process
- Reliable Noble Metal Electrode (NME) system
- Flexible termination “W” for improved bending capability performance available for selected values
- Material categorization:  
for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)

### APPLICATIONS

- Power supplies
- EMI and AC line filtering
- EV charging systems
- AC equipment and appliances
- Lighting strike and voltage surge protection
- Isolators
- Facsimile and telephone



**RoHS**  
COMPLIANT  
HALOGEN  
**FREE**  
**GREEN**  
(5-2008)

#### Aging Rate:

C0G (NP0): 0 % maximum per decade

X7R: 1 % maximum per decade

#### Voltage Proof Test:

X1 / Y2: min. 1500 V<sub>AC</sub>

X2: min. 1075 V<sub>DC</sub>

#### Peak Impulse Voltage:

X1 / Y2: 5000 V

X2: 2500 V

Meet 2600 V<sub>AC</sub>/60 s

#### Voltage Rating DC:

X1 / Y2: 2000 V<sub>DC</sub>

X2: 1500 V<sub>DC</sub>

#### Climatic Category According to EN 60068-1:

55/125/21

**QUICK REFERENCE DATA**

DIELECTRIC	CASE	MAXIMUM VOLTAGE (V <sub>AC</sub> )	CAPACITANCE	
			MINIMUM	MAXIMUM
C0G (NP0) (X1 / Y2)	2008	250	10 pF	220 pF
	2220	250	47 pF	1.0 nF
C0G (NP0) (X2)	2008	250	10 pF	390 pF
X7R (X1 / Y2)	2008	250	100 pF	1.0 nF
	2220	250	270 pF	4.7 nF
X7R (X2)	2008	250	100 pF	2.7 nF
	2220	250	270 pF	12 nF

**Notes**

- Detail ratings see “Selection Chart”
- Size 2008 is compatible with 1808 solderlands and full conform with the IEC-60384-14 requirements for creepage distance

**ORDERING INFORMATION**

VJ2008	Y	102	K	X	U	S	T	### <sup>(1)</sup>
CASE CODE	DIELECTRIC	CAPACITANCE NOMINAL CODE	CAPACITANCE TOLERANCE	TERMINATION	AC VOLTAGE RATING	MARKING	PACKAGING	PROCESS CODE
2008 2220	A = C0G (NP0) Y = X7R	Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. <b>Examples:</b> 101 = 100 pF 102 = 1000 pF 103 = 10 000 pF	C0G (NP0): J = $\pm 5\%$ K = $\pm 10\%$  X7R: K = $\pm 10\%$ M = $\pm 20\%$	X = Ni barrier 100 % matte tin plate finish W = Ni barrier with flexible layer, 100 % matte tin plate finish	U = 250 V <sub>AC</sub>	S = marked (see Part Marking table below)	T = 7" reel / plastic tape	X1 = X1 / Y2 X2 = X2 Vishay automotive grade per customer request, add "A": X1A = X1 / Y2 X2A = X2


**Notes**

- Detail ratings see “Selection Chart”
- <sup>(1)</sup> Process code must be added to control products and requirements

**PART MARKING**


MARKING	1 <sup>ST</sup> DIGIT MANUFACTURER	2 <sup>ND</sup> DIGIT DIELECTRIC AND RATING
VC	V = Vishay	C = C0G (NP0), X1 / Y2 - “X” termination option
VT		T = C0G (NP0), X2 - “X” termination option
VD		D = C0G (NP0), X1 / Y2 - “W” termination option
VU		U = C0G (NP0), X2 - “W” termination option
VA		A = X7R, X1 / Y2 - “X” termination option
VM		M = X7R, X2 - “X” termination option
VB		B = X7R, X1 / Y2 - “W” termination option
VN		N = X7R, X2 - “W” termination option

## DIMENSIONS FOR "X" TERMINATION OPTION in inches (millimeters)

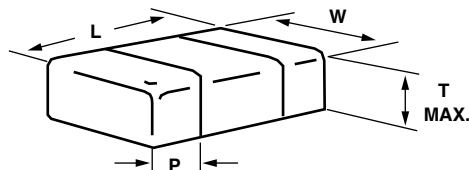


CASE CODE	PART ORDERING NUMBER	LENGTH (L)	WIDTH (W)	MAXIMUM THICKNESS (T)	TERMINATION (P)	
					MINIMUM	MAXIMUM
2008	VJ2008	0.200 ± 0.010 (5.08 ± 0.25)	0.080 ± 0.010 (2.03 ± 0.25)	0.086 (2.18)	0.010 (0.25)	0.030 (0.76)
2220	VJ2220	0.220 ± 0.008 (5.59 ± 0.20)	0.200 ± 0.010 (5.08 ± 0.25)	0.086 (2.18)	0.010 (0.25)	0.030 (0.76)

## DIMENSIONS FOR "W" TERMINATION OPTION in inches (millimeters)

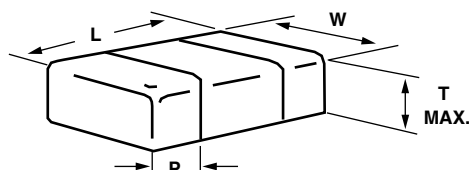

CASE CODE	PART ORDERING NUMBER	LENGTH (L)	WIDTH (W)	MAXIMUM THICKNESS (T)	TERMINATION (P)	
					MINIMUM	MAXIMUM
2008	VJ2008	0.200 - 0.010 / + 0.020 (5.08 - 0.25 / + 0.50)	0.080 ± 0.010 (2.03 ± 0.25)	0.086 (2.18)	0.010 (0.25)	0.030 (0.76)
2220 COG (NP0)	VJ2220A	0.220 - 0.008 / + 0.018 (5.59 - 0.20 / + 0.45)	0.200 ± 0.010 (5.08 ± 0.25)	0.086 (2.18)	0.010 (0.25)	0.030 (0.76)
2220 X7R	VJ2220Y	0.220 - 0.008 / + 0.018 (5.59 - 0.20 / + 0.45)	0.200 ± 0.010 (5.08 ± 0.25)	0.105 (2.65)	0.010 (0.25)	0.030 (0.76)

## RECOMMENDED SOLDERING PAD DIMENSIONS in millimeters



CASE CODE	A	B	C	r <sup>(1)</sup>
2008	2.70	1.50	4.00	0.5
2220	5.80	1.50	4.20	0.5

### Note

<sup>(1)</sup> Radius optional



SELECTION CHART				
DIELECTRIC		C0G (NP0) (X1 / Y2)		C0G (NP0) (X2)
STYLE		VJ2008 <sup>(1)</sup>	VJ2220 <sup>(1)</sup>	VJ2008 <sup>(1)</sup>
CASE CODE		2008	2220	2008
VOLTAGE (V <sub>AC</sub> )		250	250	250
VOLTAGE CODE		U	U	U
CAP. CODE	CAP.			
100	10 pF	•		•
120	12 pF	•		•
150	15 pF	•		•
180	18 pF	•		•
220	22 pF	•		•
270	27 pF	•		•
330	33 pF	•		•
390	39 pF	•		•
470	47 pF	•	•	•
560	56 pF	•	•	•
680	68 pF	•	•	•
820	82 pF	•	•	•
101	100 pF	•	•	•
121	120 pF	•	•	•
151	150 pF	•	•	•
181	180 pF	•	•	•
221	220 pF	•	•	•
271	270 pF		•	•
331	330 pF		•	•
391	390 pF		•	•
471	470 pF		•	
561	560 pF		•	
681	680 pF		•	
821	820 pF		•	
102	1.0 nF		•	
122	1.2 nF			
152	1.5 nF			
182	1.8 nF			

**Note**

<sup>(1)</sup> See soldering recommendations within this data book, or visit [www.vishay.com/doc?45034](http://www.vishay.com/doc?45034)



SELECTION CHART					
DIELECTRIC		X7R (X1 / Y2)		X7R (X2)	
STYLE		VJ2008 <sup>(1)</sup>	VJ2220 <sup>(1)</sup>	VJ2008 <sup>(1)</sup>	VJ2220 <sup>(1)</sup>
CASE CODE		2008	2220	2008	2220
VOLTAGE (V <sub>AC</sub> )		250	250	250	250
VOLTAGE CODE		U	U	U	U
CAP. CODE	CAP.				
100	10 pF				
220	22 pF				
330	33 pF				
470	47 pF				
560	56 pF				
680	68 pF				
820	82 pF				
101	100 pF	•		•	
121	120 pF	•		•	
151	150 pF	•		•	
181	180 pF	•		•	
221	220 pF	•		•	
271	270 pF	•	•	•	•
331	330 pF	•	•	•	•
391	390 pF	•	•	•	•
471	470 pF	•	•	•	•
561	560 pF	•	•	•	•
681	680 pF	•	•	•	•
821	820 pF	•	•	•	•
102	1.0 nF	•	•	•	•
122	1.2 nF		•	•	•
152	1.5 nF		•	•	•
182	1.8 nF		•	•	•
222	2.2 nF		•	•	•
272	2.7 nF		•	•	•
332	3.3 nF		•		•
392	3.9 nF		•		•
472	4.7 nF		•		•
562	5.6 nF				•
682	6.8 nF				•
822	8.2 nF				•
103	10 nF				•
123	12 nF				•
153	15 nF				

**Notes**

■ Values available with “W” termination

<sup>(1)</sup> See soldering recommendations within this data book, or visit [www.vishay.com/doc?45034](http://www.vishay.com/doc?45034)

**PACKAGING QUANTITIES <sup>(1)</sup>**

CASE CODE	TAPE SIZE	7" REEL QUANTITIES
		PACKAGING CODE "T"
2008	12 mm	2000
2220	12 mm	1000

**Note**

<sup>(1)</sup> Reference: EIA standard RS481 - "Taping of Surface Mount Components for Automatic Placement"

**APPROVALS FOR C0G (NP0)**

VDE approval mark (update 2020-02-20):

X1 / Y2-capacitor:	40036706	10 pF to 1000 pF	250 V <sub>AC</sub>
X2-capacitor:	40036706	10 pF to 470 pF	250 V <sub>AC</sub>
DIN EN 60384-14 (VDE 0565-1-1):2014-04; EN 60384-14:2013-08; IEC 60384-14 (ed.4)			



CAN / cCSAus approval mark (update 2020-05-05):

X1 / Y2-capacitor:	70001064	10 pF to 1000 pF	250 V~
X2-capacitor:	70001064	10 pF to 470 pF	250 V~



CAN / CSA-E60384-14:14 and ANSI / UL 60384-14-2017

**APPROVALS FOR X7R**

VDE approval mark (\*update 2020-02-20), \*\* update 2021-01-14:

X1 / Y2-capacitor:	X termination	40037440*	82 pF to 4700 pF	250 V <sub>AC</sub>
	W termination	40052169**	100 pF to 4700 pF	
X2-capacitor:	X termination	40037440*	82 pF to 12 000 pF	250 V <sub>AC</sub>
	W termination	40052169**	100 pF to 12 000 pF	



DIN EN 60384-14 (VDE 0565-1-1):2014-04; EN 60384-14:2013-08; IEC 60384-14 (ed.4)

CSA / cCSAus approval mark (update 2020-05-05):

X1 / Y2-capacitor:	70001064	82 pF to 4700 pF	250 V~
X2-capacitor:	70001064	82 pF to 12 000 pF	250 V~



CAN / CSA-E60384-14:14 and ANSI / UL 60384-14-2017

**GENERAL CERTIFICATES**

# Quality management system according to ISO/IATF 16949	Yes
# Quality management system according to ISO 9001	Yes
# Environmental certification according to ISO 14001	Yes
# Health and safety system according to ISO 45001	Yes

**STORAGE AND HANDLING CONDITIONS**

(1) Store the components at 5 °C to 40 °C ambient temperature and ≤ 70 % relative humidity conditions.


(2) The product is recommended to be used within a time-frame of 2 years after shipment.

Check solderability in case extended shelf life beyond the expiry date is needed.

**Precautions:**

- Do not store products in an environment containing corrosive elements, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. This may cause corrosion or oxidization of the terminations, which can easily lead to poor soldering.
- Store products on the shelf and avoid exposure to moisture or dust.
- Do not expose products to excessive shock, vibration, direct sunlight and so on.

## Solder Pad Dimensions for Vishay Surface-Mount Multilayer Ceramic Chip Capacitors

DIMENSIONS in millimeters			
			
CASE CODE	A	B	C
0402	0.50	0.50	0.40
0505	1.35	1.00	0.60
0603	0.90	1.00	1.00 <sup>(3)</sup>
0805	1.30	1.20	1.00
1111	2.90	1.30	1.75
1206	1.80	1.20	2.10
1210	2.80	1.30	1.90
1808	2.40	1.50	3.00
1812	3.60	1.50	3.00
1825	6.50	1.50	3.00
2008	2.70	1.50	4.08
2220	5.50 <sup>(4)</sup>	1.50	4.20
2225	6.50	1.50	4.20
2525	6.60	1.50	4.50
3040	10.80	2.00	5.50
3640	10.80	2.00	7.00
3838	10.20	2.00	7.50
4044	12.30	2.00	8.00

### Notes

- <sup>(1)</sup> For safety capacitors and voltages above 3000 V, corner rounding (R) of 0.5 mm is recommended to suppress arcing
- <sup>(2)</sup> Add a 1 mm slot in PCB between pads to allow cleaning and coating under MLCC
- <sup>(3)</sup> For VJ HiFREQ Series, this dimension is 0.6 mm
- <sup>(4)</sup> For safety capacitors, the A dimension should be 5.80 mm



## PRINTED CIRCUIT BOARD PCB DESIGN CONSIDERATIONS FOR HIGH VOLTAGE SURFACE-MOUNT MLCCS

Special assembly process and design considerations should be employed for today's high voltage rating MLCCs. As case sizes remain the same and voltage ratings increase, MLCC manufacturers must design, evaluate, and qualify their capacitors using methods that reduce the occurrence of corona discharge and arcover events. To meet similar capability in high voltage applications, users should employ similar cautionary design and assembly methods.

### MLCC PAD LAYOUT

A capacitor's arcover inception point can degrade due to factors such as the MLCC termination, PCB pad design, PCB cleanliness, solder flux residue, surface contamination / deposits and environmental conditions. PCB pads and their design affect the air gap distance between the opposing polarities of the MLCC termination. For voltage rating greater than 1500 V<sub>DC</sub> add a corner radius to the inward facing edge of the MLCC pads and as large a gap as possible between the pads. Too small of a pad gap distance will reduce the capacitor's own arcover inception voltage level. Refer to the Figure and Table Figure 1.0, MLCC Pad Layout and Table 1.0, Vishay MLCC Solder Pad Dimensions for the recommended MLCC solder pad dimensions.

### SLOT OR TRENCH BETWEEN PADS

PCB assembly can deposit dust, trap solder balls, or flux residue underneath the capacitors. These contaminants will reduce conductive clearances and the arcover inception level. Assembly methods must include a final PCB cleaning process. A slot or trench can be cut into the PCB in between the pads to allow cleaners to penetrate underneath the MLCC. The slot will also allow conformal or epoxy coatings to flow underneath the MLCC and build an insulative barrier between pads. Refer to Figure 1.0 MLCC Pad Layout for slot reference location.

### COATING PRINTED CIRCUIT BOARD

Coating a printed circuit board with materials such as acrylic, silicone and urethane resins provide a protective dielectric barrier that is non-conductive and will enhance the resistance to arcing. Various processes exist which include dipping, brushing, and spraying. Optimal performance will come from coating the MLCC on all sides, top and bottom. The PCB slot in between the pads should extend slightly beyond the width of the MLCC. Refer to Figure 1.0 MLCC Pad Layout for slot reference location.





## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.