



## Leaded Magnetics Packaging Methods

### REEL PACK

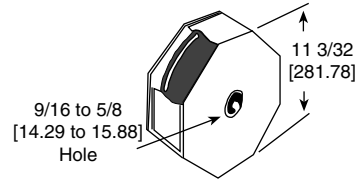

TAPE AND REEL in inches [millimeters]											
MODEL	PREVIOUS CODE	GLOBAL CODE LEAD (Pb)-BEARING	GLOBAL CODE LEAD (Pb)-FREE	REEL SIZE	CARRIER TAPE WIDTH (W)	COMPONENT PITCH (P)	UNITS/ REEL	PREVIOUS CODE	GLOBAL CODE LEAD (Pb)-BEARING	GLOBAL CODE LEAD (Pb)-FREE	UNITS/ BULK
IRF-24	-	-	ER	12	2.06 [52.39]	0.2 [5.08]	5000	-	-	-	-
IRF-36	-	-	ER	12	2.06 [52.39]	0.2 [5.08]	5000	-	-	-	-
IRF-46	-	-	ER	12	2.06 [52.39]	0.2 [5.08]	3000	-	-	-	-
IHD-1	R16	RR	ER	12	2.06 [52.39]	0.4 [10.16]	800	B08	BH	EB	50
IHD-3	RA3	AC	ER	12	2.87 [72.90]	0.6 [15.24]	200	B08	BH	EB	190
IHD-2	-	-	-	-	-	-	-	-	-	EB	150
IHD-4	-	-	-	-	-	-	-	-	-	EB	60
IHA-101	-	-	-	-	-	-	-	B01	BA	EB	210
IHA-102	-	-	-	-	-	-	-	B01	BA	EB	210
IHA-103	-	-	-	-	-	-	-	B01	BA	EB	200
IHA-104	-	-	-	-	-	-	-	B01	BA	EB	160
IHA-105	-	-	-	-	-	-	-	B01	BA	EB	160
IHA-201	-	-	-	-	-	-	-	B01	BA	EB	200
IHA-202	-	-	-	-	-	-	-	B01	BA	EB	180
IHA-203	-	-	-	-	-	-	-	B01	BA	EB	160
IHA-204	-	-	-	-	-	-	-	B01	BA	EB	120
IHA-205	-	-	-	-	-	-	-	B01	BA	EB	75
IHA-301	-	-	-	-	-	-	-	B01	BA	EB	210
IHA-302	-	-	-	-	-	-	-	B01	BA	EB	240
IHA-303	-	-	-	-	-	-	-	B01	BA	EB	160
IHA-304	-	-	-	-	-	-	-	B01	BA	EB	160
IHA-305	-	-	-	-	-	-	-	B01	BA	EB	160
IHA-501	-	-	-	-	-	-	-	B01	BA	EB	210
IHA-502	-	-	-	-	-	-	-	B01	BA	EB	200
IHA-503	-	-	-	-	-	-	-	B01	BA	EB	75
IHA-504	-	-	-	-	-	-	-	B01	BA	EB	75
IHA-505	-	-	-	-	-	-	-	B01	BA	EB	75
IHTH-0750IZ	-	-	-	-	-	-	-	-	-	EB	100
IHTH-1125KZ	-	-	-	-	-	-	-	-	-	EB	50
IHTH-1500MZ	-	-	-	-	-	-	-	-	-	EB	25
IHTH-1500TZ	-	-	-	-	-	-	-	-	-	EB	25
IHXL-1500VZ	-	-	-	-	-	-	-	-	-	EB	100
IHXL-2000VZ	-	-	-	-	-	-	-	-	-	EB	40
IH-3 5 $\mu$ H, 27 $\mu$ H, 50 $\mu$ H, 100 $\mu$ H	-	-	-	-	-	-	-	B15	BQ	EB	150
IH-3 10 $\mu$ H	-	-	-	-	-	-	-	B15	BQ	EB	200
IH-3 150 $\mu$ H	-	-	-	-	-	-	-	B15	BQ	EB	50
IH-3 250 $\mu$ H	-	-	-	-	-	-	-	B15	BQ	EB	75
IH-4 0 $\mu$ H	-	-	-	-	-	-	-	B15	BQ	EB	160
IH-5 5 $\mu$ H, 10 $\mu$ H	-	-	-	-	-	-	-	B15	BQ	EB	200
IH-5 27 $\mu$ H	-	-	-	-	-	-	-	B15	BQ	EB	150



TAPE AND REEL in inches [millimeters]											
MODEL	PREVIOUS CODE	GLOBAL CODE LEAD (Pb)-BEARING	GLOBAL CODE LEAD (Pb)-FREE	REEL SIZE	CARRIER TAPE WIDTH (W)	COMPONENT PITCH (P)	UNITS/ REEL	PREVIOUS CODE	GLOBAL CODE LEAD (Pb)-BEARING	GLOBAL CODE LEAD (Pb)-FREE	UNITS/ BULK
IH-5 50 μH, 68μH, 100 μH, 150 μH	-	-	-	-	-	-	-	B15	BQ	EB	50
IH-10 5 μH, 10 μH	-	-	-	-	-	-	-	B15	BQ	EB	150
IH-10 27 μH	-	-	-	-	-	-	-	B15	BQ	EB	50
IH-10 50 μH, 68 μH, 100 μH	-	-	-	-	-	-	-	B15	BQ	EB	75
IH-15 5 μH	-	-	-	-	-	-	-	B15	BQ	EB	50
IH-15 10 μH, 27 μH	-	-	-	-	-	-	-	B15	BQ	EB	75
IH-15 50 μH	-	-	-	-	-	-	-	B15	BQ	EB	60
IHM-2	-	-	-	-	-	-	-	P12	PM	EB	20
IHB-1	-	-	-	-	-	-	-	B40	BV	EB	48
IHB-2	-	-	-	-	-	-	-	B40	BV	EB	30
IHB-3	-	-	-	-	-	-	-	B40	BV	EB	20
IHB-4	-	-	-	-	-	-	-	B40	BV	EB	16
IHB-5	-	-	-	-	-	-	-	B40	BV	EB	16
IHB-6	-	-	-	-	-	-	-	B40	BV	EB	16
IHV-15-500	-	-	-	-	-	-	-	B48	BZ	EB	10
IHV-20-200	-	-	-	-	-	-	-	B48	BZ	EB	10
IHV-28-60	-	-	-	-	-	-	-	B48	BZ	EB	14
IHV-30-150	-	-	-	-	-	-	-	B48	BZ	EB	5
IHV-40-39	-	-	-	-	-	-	-	B48	BZ	EB	10
IHV-45-92	-	-	-	-	-	-	-	B48	BZ	EB	5
IHV-50-50	-	-	-	-	-	-	-	B48	BZ	EB	5
IHV-60-24	-	-	-	-	-	-	-	B48	BZ	EB	5
TJ3-1U	-	-	-	-	-	-	-	T07	TG	EB	260
TJ3-2U	-	-	-	-	-	-	-	T07	TG	EB	169
TJ3-1U-HT	-	-	-	-	-	-	-	-	-	EB	260
TJ3-2U-HT	-	-	-	-	-	-	-	-	-	EB	169
TJ4-1U	-	-	-	-	-	-	-	T07	TG	EB	220
TJ4-2U	-	-	-	-	-	-	-	T07	TG	EB	121
TJ5-1U	-	-	-	-	-	-	-	T07	TG	EB	170
TJ5-2U	-	-	-	-	-	-	-	T07	TG	EB	100
TJ5-1U-HT	-	-	-	-	-	-	-	-	-	EB	170
TJ5-2U-HT	-	-	-	-	-	-	-	-	-	EB	100
TJ6-1U	-	-	-	-	-	-	-	T07	TG	EB	70
TJ6-2U	-	-	-	-	-	-	-	T07	TG	EB	49
TJ7-1U	-	-	-	-	-	-	-	T07	TG	EB	66
TJ7-2U	-	-	-	-	-	-	-	T07	TG	EB	30
TJ8-1U	-	-	-	-	-	-	-	T07	TG	EB	28
TJ8-2U	-	-	-	-	-	-	-	T07	TG	EB	16
TJ9-1U	-	-	-	-	-	-	-	T07	TG	EB	18
TJ9-2U	-	-	-	-	-	-	-	T07	TG	EB	9
IWAS-4832FF	-	-	-	-	-	-	-	-	-	EB	100
IWAS-4832EC	-	-	-	-	-	-	-	-	-	EB	100
IHDM1008	-	-	-	-	-	-	-	-	-	EV	120
IHDM1107	-	-	-	-	-	-	-	-	-	EV	120
IHDF1300	-	-	-	-	-	-	-	-	-	EH	120
IHPT1207	-	-	-	-	-	-	-	-	-	EL / EB	60
IHPT1411	-	-	-	-	-	-	-	-	-	EL / EB	48
IHPT1614	-	-	-	-	-	-	-	-	-	EL / EB	40
IHPT1710	-	-	-	-	-	-	-	-	-	EL / EB	48



<b>MILITARY PART ORDERING EXAMPLES</b>		
<b>TRANSFORMERS AND INDUCTORS</b>		
<b>MIL-T-27E</b> (Basic [TF]) (Established Reliability - None) $\frac{M27}{1} \quad \frac{215}{2} \quad \frac{05}{3} = \text{Dale Type} \quad \text{TE-3Q0TR} \quad 1.0 \text{ mH} \quad 2\%$		1. Military specification 2. Specification sheet number 3. Specification sheet dash number indicating value and electrical ratings
<b>MIL-C-15305E</b> (Basic [LT]) (Established Reliability MIL-C-39010) <b>Note:</b> Parts will be color banded. Value per military standard dash numer. $\frac{LT}{1} \quad \frac{4}{2} \quad \frac{K}{3} = \text{Dale Type} \quad \text{IM-2} \quad 0.10 \mu\text{H to } 1.00 \mu\text{H} \quad 10\%$		1. Style 2. Grade and class 3. Family K = Coil, radio frequency, fixed