



Axial Leaded Multilayer Ceramic Capacitors for Automotive Applications

Class 1 and Class 2, 50 V_{DC}, 100 V_{DC}, 200 V_{DC}



FEATURES

- Good performance for motor driver and sensor
- AEC-Q200 qualified with PPAP available
- Alleviation for mechanical stress
- Assembly friendly
- Parts compliant with ELV directive
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE

APPLICATIONS

- Automotive
- Motor driver and sensor
- Speed sensor
- Wiper motor
- Power window motor

QUICK REFERENCE DATA

DESCRIPTION	VALUE					
Ceramic class	1			2		
Ceramic dielectric	C0G			X7R		
Voltage (V _{DC})	50	100	200	50	100	200
Min. capacitance (pF)	10	10	10	100	100	100
Max. capacitance (pF)	47 000	47 000	15 000	1 000 000	220 000	22 000
Mounting	Axial					

MARKING

Marking indicates capacitance value and tolerance in accordance with “EIA 198” and voltage marks.

OPERATING TEMPERATURE RANGE

-55 °C to +125 °C

TEMPERATURE CHARACTERISTICS

Class 1: C0G

Class 2: X7R

SECTIONAL SPECIFICATIONS

Climatic category (acc. to EN 60058-1)

Class 1 and 2: 55 / 125 / 21

APPROVALS

EIA 198

IEC 60384-9

AEC-Q200

DESIGN

- The capacitors consist of a high reliability MLCC
- The lead wires are 0.5 mm and are made of 100 % tinned copper clad steel wire
- Coating is made of blue colored flame retardant epoxy resin in accordance with UL 94 V-0

CAPACITANCE RANGE

10 pF to 1 µF

TOLERANCE ON CAPACITANCE

± 5 %, ± 10 %, ± 20 %

RATED VOLTAGE

50 V_{DC}, 100 V_{DC}, 200 V_{DC}

TEST VOLTAGE

- 50 V_{DC} and 100 V_{DC}: 250 % of rated voltage
- 200 V_{DC}: 200 % of rated voltage


INSULATION RESISTANCE

≥ 10 GΩ or R x C ≥ 100 ΩF whichever is less at rated voltage within 2 min of charging.

DISSIPATION FACTOR OR Q VALUE

- Class 1: cap. ≥ 30 pF, Q ≥ 1000
cap. < 30 pF, Q ≥ 400 + 20C
(at 1 MHz, 1 V where C ≤ 1000 pF;
at 1 kHz; 1 V where C > 1000 pF)
- Class 2: DF ≤ 2.5 %, cap. < 0.18 µF
DF ≤ 3.0 %, cap. ≥ 0.18 µF
(at 1 kHz, 1 V)

DIMENSIONS (in millimeters)

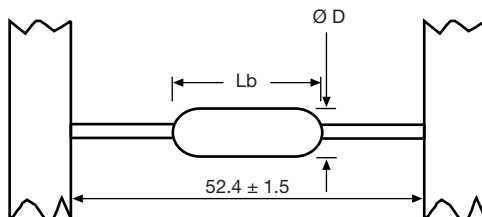


SIZE CODE	Lb _{MAX.}	ØD _{MAX.}
15	3.8	2.6
20	5.1	3.1
20	5.1	4.5 ⁽¹⁾

Notes

- The leads are matte tinned FeCu wire
- ⁽¹⁾ Please refer to "Ordering Codes"

MARKING

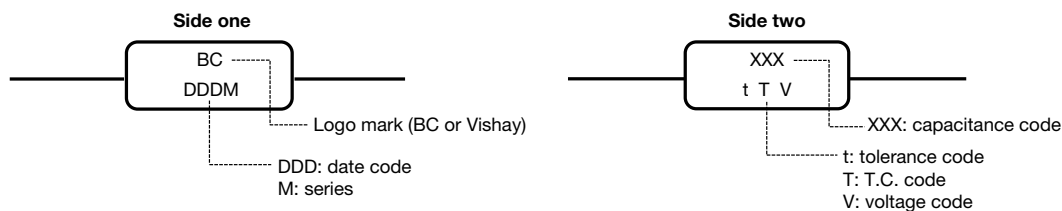

MARKING CODE DESCRIPTION

DDDW	XXX	t	V	T
Date Code	Capacitance Code	Tolerance Code	Voltage Code	T.C. Code
The first digit is the year, the last two digits are the week. For example: 109 = 2011, 9 th week 217 = 2012, 17 th week	Two significant digits followed by one digit for the multiplier as given below. 1 = * 10, 2 = * 100, 3 = * 1000, 4 = * 10 000, 5 = * 100 000	J = ± 5 % K = ± 10 % M = ± 20 %	1 = 100 V 2 = 200 V 5 = 50 V	A = C0G (NP0) C = X7R

ORDERING CODE INFORMATION

MDSA	104	K	15	X	F	5	###
1 2 3 4	5 6 7	8	9 10	11	12	13	14 15 16
Product Type	Capacitance (pF)	Capacitance Tolerance	Size Code	TC Code	Rated Voltage	Lead Diameter	Packaging
MDSA = axial leaded MLCC	The first two digits are the significant figures of capacitance and the last digit is a multiplier as follows: 1 = * 10 2 = * 100 3 = * 1000 4 = * 10 000 5 = * 100 000	J = ± 5 % K = ± 10 % M = ± 20 %	Please refer to relevant datasheet	X stands for X7R C stands for C0G	F = 50 V _{DC} H = 100 V _{DC} K = 200 V _{DC}	5 = 0.50 mm ± 0.05 mm	TAA = reel UAA = ammo



ORDERING CODES

DIELECTRIC COG			
CAP. (pF)	50 V _{DC}	100 V _{DC}	200 V _{DC}
10	MDSA100#15CF5###	MDSA100#15CH5###	MDSA100#15CK5###
12	MDSA120#15CF5###	MDSA120#15CH5###	MDSA120#15CK5###
15	MDSA150#15CF5###	MDSA150#15CH5###	MDSA150#15CK5###
18	MDSA180#15CF5###	MDSA180#15CH5###	MDSA180#15CK5###
22	MDSA220#15CF5###	MDSA220#15CH5###	MDSA220#15CK5###
27	MDSA270#15CF5###	MDSA270#15CH5###	MDSA270#15CK5###
33	MDSA330#15CF5###	MDSA330#15CH5###	MDSA330#15CK5###
39	MDSA390#15CF5###	MDSA390#15CH5###	MDSA390#15CK5###
47	MDSA470#15CF5###	MDSA470#15CH5###	MDSA470#15CK5###
56	MDSA560#15CF5###	MDSA560#15CH5###	MDSA560#15CK5###
68	MDSA680#15CF5###	MDSA680#15CH5###	MDSA680#15CK5###
82	MDSA820#15CF5###	MDSA820#15CH5###	MDSA820#15CK5###
100	MDSA101#15CF5###	MDSA101#15CH5###	MDSA101#15CK5###
120	MDSA121#15CF5###	MDSA121#15CH5###	MDSA121#15CK5###
150	MDSA151#15CF5###	MDSA151#15CH5###	MDSA151#15CK5###
180	MDSA181#15CF5###	MDSA181#15CH5###	MDSA181#15CK5###
220	MDSA221#15CF5###	MDSA221#15CH5###	MDSA221#15CK5###
270	MDSA271#15CF5###	MDSA271#15CH5###	MDSA271#15CK5###
330	MDSA331#15CF5###	MDSA331#15CH5###	MDSA331#15CK5###
390	MDSA391#15CF5###	MDSA391#15CH5###	MDSA391#15CK5###
470	MDSA471#15CF5###	MDSA471#15CH5###	MDSA471#15CK5###
560	MDSA561#15CF5###	MDSA561#15CH5###	MDSA561#15CK5###
680	MDSA681#15CF5###	MDSA681#15CH5###	MDSA681#15CK5###
820	MDSA821#15CF5###	MDSA821#15CH5###	MDSA821#15CK5###
1000	MDSA102#15CF5###	MDSA102#15CH5###	MDSA102#15CK5###
1200	MDSA122#15CF5###	MDSA122#15CH5###	MDSA122#15CK5###
1500	MDSA152#15CF5###	MDSA152#15CH5###	MDSA152#15CK5###
1800	MDSA182#15CF5###	MDSA182#15CH5###	MDSA182#15CK5###
2200	MDSA222#15CF5###	MDSA222#15CH5###	MDSA222#15CK5###
2700	MDSA272#15CF5###	MDSA272#15CH5###	MDSA272#15CK5###
3300	MDSA332#15CF5###	MDSA332#15CH5###	MDSA332#15CK5###
3900	MDSA392#15CF5###	MDSA392#15CH5###	MDSA392#15CK5###
4700	MDSA472#15CF5###	MDSA472#15CH5###	MDSA472#15CK5###
5600	MDSA562#15CF5###	MDSA562#15CH5###	MDSA562#20CK5###
6800	MDSA682#15CF5###	MDSA682#15CH5###	MDSA682#20CK5###
8200	MDSA822#15CF5###	MDSA822#15CH5###	MDSA822#20CK5###
10 000	MDSA103#15CF5###	MDSA103#15CH5###	MDSA103#20CK5###
12 000	MDSA123#15CF5###	MDSA123#20CH5###	MDSA123#20CK5### ⁽¹⁾
15 000	MDSA153#15CF5###	MDSA153#20CH5###	MDSA153#20CK5### ⁽¹⁾
18 000	MDSA183#15CF5###	MDSA183#20CH5### ⁽¹⁾	-
22 000	MDSA223#15CF5###	MDSA223#20CH5### ⁽¹⁾	-
27 000	MDSA273#20CF5### ⁽¹⁾	MDSA273#20CH5### ⁽¹⁾	-
33 000	MDSA333#20CF5### ⁽¹⁾	MDSA333#20CH5### ⁽¹⁾	-
39 000	MDSA393#20CF5### ⁽¹⁾	MDSA393#20CH5### ⁽¹⁾	-
47 000	MDSA473#20CF5### ⁽¹⁾	MDSA473#20CH5### ⁽¹⁾	-

Notes

- 8th digit is capacitance tolerance code: $\pm 5\%$ = J; $\pm 10\%$ = K

⁽¹⁾ $\varnothing D_{MAX.} = 4.5\text{ mm}$



DIELECTRIC X7R			
CAP. (pF)	50 V _{DC}	100 V _{DC}	200 V _{DC}
101	MDSA101#15XF5###	MDSA101#15XH5###	MDSA101#15XK5###
221	MDSA221#15XF5###	MDSA221#15XH5###	MDSA221#15XK5###
330	MDSA331#15XF5###	MDSA331#15XH5###	MDSA331#15XK5###
390	MDSA391#15XF5###	MDSA391#15XH5###	MDSA391#15XK5###
470	MDSA471#15XF5###	MDSA471#15XH5###	MDSA471#15XK5###
560	MDSA561#15XF5###	MDSA561#15XH5###	MDSA561#15XK5###
680	MDSA681#15XF5###	MDSA681#15XH5###	MDSA681#15XK5###
820	MDSA821#15XF5###	MDSA821#15XH5###	MDSA821#15XK5###
1000	MDSA102#15XF5###	MDSA102#15XH5###	MDSA102#15XK5###
1200	MDSA122#15XF5###	MDSA122#15XH5###	MDSA122#15XK5###
1500	MDSA152#15XF5###	MDSA152#15XH5###	MDSA152#15XK5###
1800	MDSA182#15XF5###	MDSA182#15XH5###	MDSA182#15XK5###
2200	MDSA222#15XF5###	MDSA222#15XH5###	MDSA222#15XK5###
2700	MDSA272#15XF5###	MDSA272#15XH5###	MDSA272#15XK5###
3300	MDSA332#15XF5###	MDSA332#15XH5###	MDSA332#15XK5###
3900	MDSA392#15XF5###	MDSA392#15XH5###	MDSA392#15XK5###
4700	MDSA472#15XF5###	MDSA472#15XH5###	MDSA472#15XK5###
5600	MDSA562#15XF5###	MDSA562#15XH5###	MDSA562#15XK5###
6800	MDSA682#15XF5###	MDSA682#15XH5###	MDSA682#15XK5###
8200	MDSA822#15XF5###	MDSA822#15XH5###	MDSA822#15XK5###
10 000	MDSA103#15XF5###	MDSA103#15XH5###	MDSA103#15XK5###
12 000	MDSA123#15XF5###	MDSA123#15XH5###	MDSA123#15XK5###
15 000	MDSA153#15XF5###	MDSA153#15XH5###	MDSA153#15XK5###
18 000	MDSA183#15XF5###	MDSA183#15XH5###	MDSA183#15XK5###
22 000	MDSA223#15XF5###	MDSA223#15XH5###	MDSA223#15XK5###
27 000	MDSA273#15XF5###	MDSA273#15XH5###	-
33 000	MDSA333#15XF5###	MDSA333#15XH5###	-
39 000	MDSA393#15XF5###	MDSA393#15XH5###	-
47 000	MDSA473#15XF5###	MDSA473#15XH5###	-
56 000	MDSA563#15XF5###	MDSA563#15XH5###	-
68 000	MDSA683#15XF5###	MDSA683#15XH5###	-
82 000	MDSA823#15XF5###	MDSA823#15XH5###	-
100 000	MDSA104#15XF5###	MDSA104#15XH5###	-
120 000	MDSA124#15XF5###	MDSA124#20XH5###	-
150 000	MDSA154#15XF5###	MDSA154#20XH5###	-
180 000	MDSA184#15XF5###	MDSA184#20XH5###	-
220 000	MDSA224#15XF5###	MDSA224#20XH5###	-
270 000	MDSA274#15XF5###	-	-
330 000	MDSA334#15XF5###	-	-
390 000	MDSA394#15XF5###	-	-
470 000	MDSA474#15XF5###	-	-
560 000	MDSA564#20XF5###	-	-
680 000	MDSA684#20XF5###	-	-
820 000	MDSA824#20XF5###	-	-
1 000 000	MDSA105#20XF5###	-	-

Note

- 8th digit is capacitance tolerance code: $\pm 10\%$ = K; $\pm 20\%$ = M



TAPING AND PACKAGING


LABELLING

Each reel is provided with a label showing the following details:

manufacturer, MDSA style, capacitance, tolerance, batch number, quantity of components, rated voltage, dielectric.

On special request other designations can be shown.


For example:

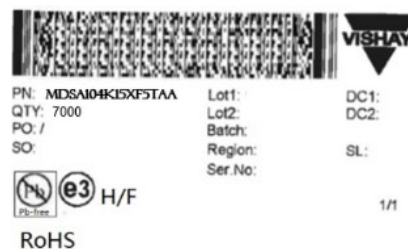

PACKAGING QUANTITIES AND BOX DIMENSIONS

PACKAGING	SIZE CODE	SMALLEST PACKAGING QUANTITY (SPQ)	BOX DIMENSIONS L x W x H (mm)
Tape on reel	15, 20	7000	370 x 370 x 90
Ammopack	15, 20	4000	265 x 85 x 95

CAPACITORS ON BANDOLIER FOR DIPPED AXIAL

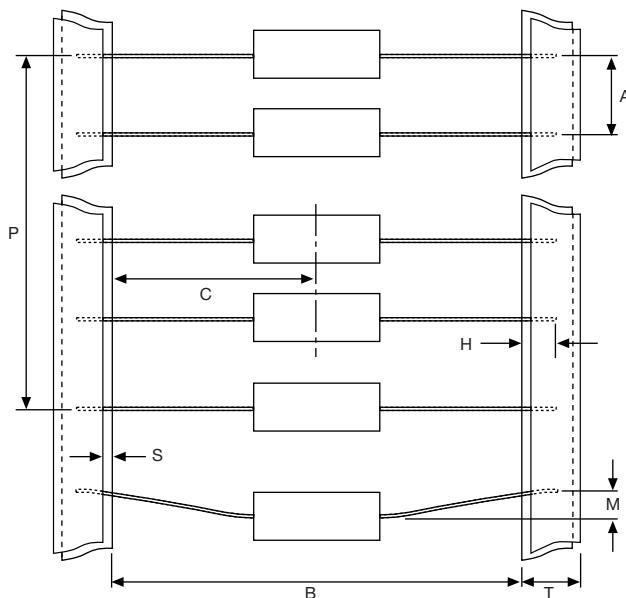

PARAMETER	SYMBOL	DIMENSIONS	
		mm	INCH
Inside tape spacing	B ⁽¹⁾	52.4 ± 1.5	2.062 ± 0.059
Center to tape spacing	C	± 0.8	± 0.031
Cumulative pitch, 6 consecutive components	P	± 1.5	± 0.059
Components pitch	A	5.0 ± 0.5	0.197 ± 0.015
Lead bend	M	< 1.2	< 0.047
Exposed adhesive	S	< 0.51	> 0.020
Tape width	T	6.35	0.250
Lead sandwich	H	> 3.96	> 0.156

Note

⁽¹⁾ Inside tape spacing 26.0 mm + 1.51 mm / - 0.0 mm is available on request



REEL DATA

A maximum of 0.5 % of the total number of capacitors per reel may be missing.

A maximum of 1 consecutive vacant positions is followed by 6 consecutive components.

Tape begins and ends with a minimum of 4 empty positions (180 mm tape).

Maximum of 5 splicers per reel.

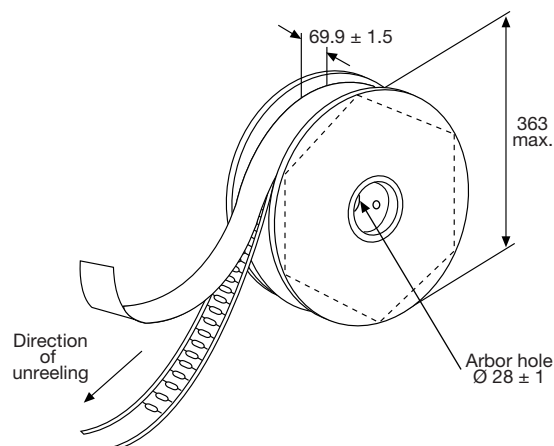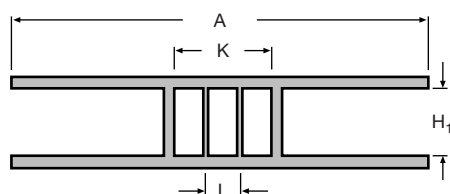REEL**REEL DIMENSIONS**

REEL SIZE		(mm)
A	Outer diameter	363 max.
L	Hole diameter	28 ± 1
K	Core diameter	90
H ₁	Internal width	69.9 ± 1.5

AMMOPACK DATA


A maximum of 0.5 % of the total number of capacitors per pack may be missing.

A maximum of 1 consecutive vacant positions is followed by 6 consecutive components.

Tape begins and ends with a minimum of 4 empty positions (180 mm tape).

Maximum of 5 splicers per pack.

The cumulative pitch tolerance over 20 consecutive units is not to exceed ± 1.0 mm.

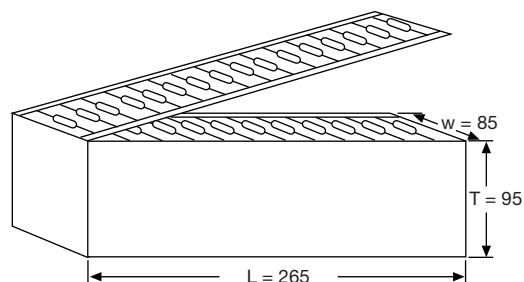AMMOPACK**RELATED DOCUMENTS**

General Information

www.vishay.com/doc?45214



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.