

Improved Quad CMOS Analog Switches

DESCRIPTION

The DG201B, DG202B analog switches are highly improved versions of the industry-standard DG201A, DG202. These devices are fabricated in Vishay Siliconix' proprietary silicon gate CMOS process, resulting in lower on-resistance, lower leakage, higher speed, and lower power consumption.

These quad single-pole single-throw switches are designed for a wide variety of applications in telecommunications, instrumentation, process control, computer peripherals, etc. An improved charge injection compensation design minimizes switching transients. The DG201B and DG202B can handle up to ± 22 V input signals, and have an improved continuous current rating of 30 mA. An epitaxial layer prevents latchup.

All devices feature true bi-directional performance in the on condition, and will block signals to the supply voltages in the off condition.

The DG201B is a normally closed switch and the DG202B is a normally open switch. (see Truth Table.)

FEATURES

- ± 22 V supply voltage rating
- TTL and CMOS compatible logic
- Low on-resistance - $R_{DS(on)}$: 45 Ω
- Low leakage - $I_{D(on)}$: 20 pA
- Single supply operation possible
- Extended temperature range
- Fast switching - t_{on} : 120 ns
- Low glitching - Q: 1 pC
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Note

* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details





BENEFITS

- Wide analog signal range
- Simple logic interface
- Higher accuracy
- Minimum transients
- Reduced power consumption
- Superior to DG201A, DG202
- Space savings (TSSOP)

APPLICATIONS

- Industrial instrumentation
- Test equipment
- Communications systems
- Disk drives
- Computer peripherals
- Portable instruments
- Sample-and-hold circuits

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

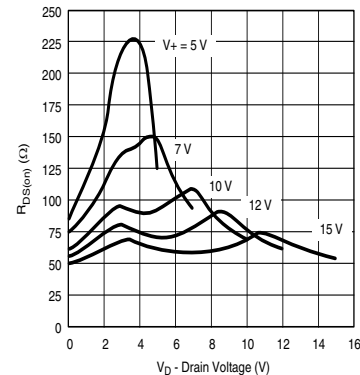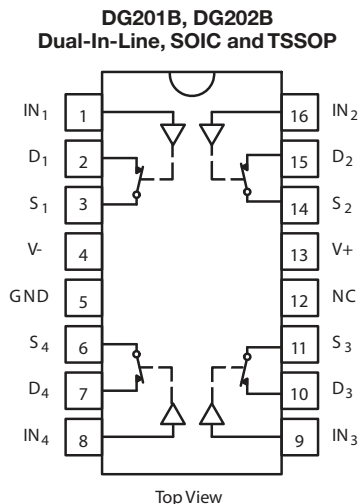

TRUTH TABLE

LOGIC	DG201B	DG202B
0	ON	OFF
1	OFF	ON

Note

- Logic "0" ≤ 0.8 V
- Logic "1" ≥ 2.4 V

ORDERING INFORMATION		
TEMP. RANGE	PACKAGE	PART NUMBER
-40 °C to +85 °C	16-pin Plastic DIP	DG201BDJ-E3
		DG202BDJ-E3
	16-pin narrow SOIC	DG201BDY-E3
		DG201BDY-T1-E3
		DG202BDY-E3 DG202BDY-T1-E3
	16-pin TSSOP	DG201BDQ-E3
		DG201BDQ-T1-E3
		DG202BDQ-E3 DG202BDQ-T1-E3

ABSOLUTE MAXIMUM RATINGS			
PARAMETER	LIMIT	UNIT	
Voltages referenced, V ₊ to V ₋	44	V	
GND	25		
Digital inputs ^a , V _S , V _D	(V ₋) - 2 to (V ₊) + 2 or 30 mA, whichever occurs first		
Current (any terminal)	30	mA	
Peak current S or D (pulsed at 1 ms, 10 % duty cycle max.)	100		
Storage temperature	(DJ, DY, DQ suffix)	-65 to +125	°C
Power dissipation (package) ^b	16-pin plastic DIP ^c	470	mW
	16-pin narrow SOIC and TSSOP ^d	640	

Notes

- Signals on S_x, D_x, or IN_x exceeding V₊ or V₋ will be clamped by internal diodes. Limit forward diode current to maximum current ratings
- All leads welded or soldered to PC board
- Derate 6.5 mW/°C above 75 °C
- Derate 7.6 mW/°C above 75 °C

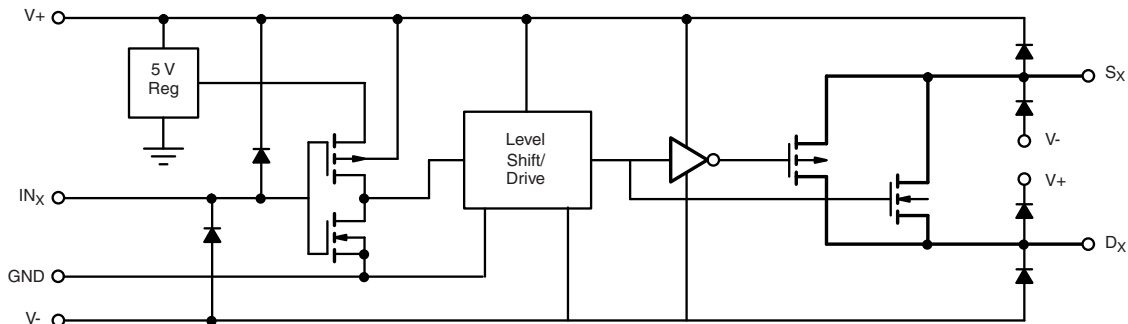
SCHEMATIC DIAGRAM (typical channel)


Fig. 1



SPECIFICATIONS ^a							
PARAMETER	SYMBOL	TEST CONDITIONS UNLESS SPECIFIED V ₊ = 15 V, V ₋ = -15 V V _{IN} = 2.4 V, 0.8 V ^f	TEMP. ^b	TYP. ^c	D SUFFIX -40 °C to +85 °C		UNIT
					MIN. ^d	MAX. ^d	
Analog Switch							
Analog signal range ^e	V _{ANALOG}		Full	-	-15	15	V
Drain-source on-resistance	R _{DS(on)}	V _D = ± 10 V, I _S = 1 mA	Room	45	-	85	Ω
R _{DS(on)} match	ΔR _{DS(on)}		Full	-	-	100	
			Room	2	-	-	
Source off leakage current	I _{S(off)}	V _S = ± 14 V, V _D = ± 14 V	Room Full	± 0.01	-0.5 -5	0.5 5	nA
Drain off leakage current	I _{D(off)}	V _D = ± 14 V, V _S = ± 14 V	Room Full	± 0.01	-0.5 -5	0.5 5	
Drain on leakage current	I _{D(on)}	V _S = V _D = ± 14 V	Room Full	± 0.02	-0.5 -10	0.5 10	
Digital Control							
Input voltage high	V _{INH}		Full	-	2.4	-	V
Input voltage low	V _{INL}		Full	-	-	0.8	
Input current	I _{INH} or I _{INL}	V _{INH} or V _{INL}	Full	-	-1	1	μA
Input capacitance	C _{IN}		Room	5	-	-	pF
Dynamic Characteristics							
Turn-on time	t _{on}	V _S = 2 V see switching time test circuit	Room	120	-	300	ns
Turn-off time	t _{off}		Room	65	-	200	
Charge injection	Q	C _L = 1000 pF, V _G = 0 V, R _G = 0 Ω	Room	1	-	-	pC
Source-off capacitance	C _{S(off)}	V _S = 0 V, f = 1 MHz	Room	5	-	-	pF
Drain-off capacitance	C _{D(off)}		Room	5	-	-	
Channel on capacitance	C _{D(on)}	V _D = V _S = 0 V, f = 1 MHz	Room	16	-	-	
Off isolation	OIRR	C _L = 15 pF, R _L = 50 Ω V _S = 1 V _{RMS} , f = 100 kHz	Room	90	-	-	dB
Channel-to-channel crosstalk	X _{TALK}		Room	95	-	-	
Power Supply							
Positive supply current	I ₊	V _{IN} = 0 or 5 V	Room	-	-	50	μA
			Full	-	-	100	
Negative supply current	I ₋		Room	-	-1	-	
			Full	-	-5	-	
Power supply range for continuous operation	V _{OP}		Full	-	± 4.5	± 22	V



SPECIFICATIONS ^a (for Single Supply)							
PARAMETER	SYMBOL	TEST CONDITIONS UNLESS SPECIFIED $V_+ = 12\text{ V}$, $V_- = 0\text{ V}$ $V_{IN} = 2.4\text{ V}$, 0.8 V_f	TEMP. ^b	TYP. ^c	D SUFFIX -40 °C to +85 °C		UNIT
					MIN. ^d	MAX. ^d	
Analog Switch							
Analog signal range ^e	V_{ANALOG}		Full	-	0	12	V
Drain-source on-resistance	$R_{DS(on)}$	$V_D = 3\text{ V}$, 8 V , $I_S = 1\text{ mA}$	Room	90	-	160	Ω
			Full	-	-	200	Ω
Dynamic Characteristics							
Turn-on time	t_{on}	$V_S = 8\text{ V}$ see switching time test circuit	Room	120	-	300	ns
Turn-off time	t_{off}		Room	60	-	200	
Charge injection	Q	$C_L = 1\text{ nF}$, $V_{gen} = 6\text{ V}$, $R_{gen} = 0\ \Omega$	Room	4	-	-	pC
Power Supply							
Positive supply current	I+	$V_{IN} = 0\text{ or }5\text{ V}$	Room	-	-	50	μA
			Full	-	-	100	
Negative supply current	I-		Room	-	-1	-	
			Full	-	-5	-	
Power supply range for continuous operation	V_{OP}		Full	-	+4.5	+25	V


Notes

- Refer to PROCESS OPTION FLOWCHART
- Room = 25 °C, full = as determined by the operating temperature suffix
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing
- The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this datasheet
- Guaranteed by design, not subject to production test
- V_{IN} = input voltage to perform proper function


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.




TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

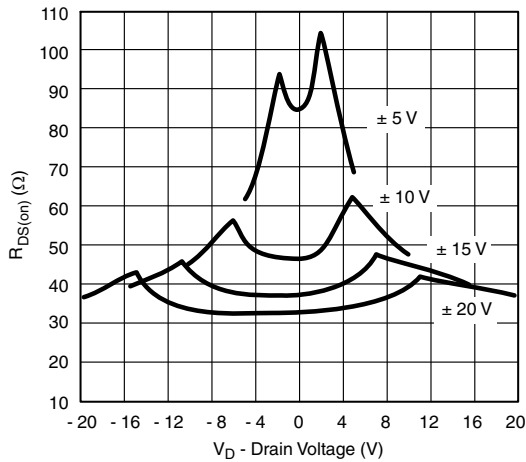


R_{DS(on)} vs. V_D and Power Supply Voltages

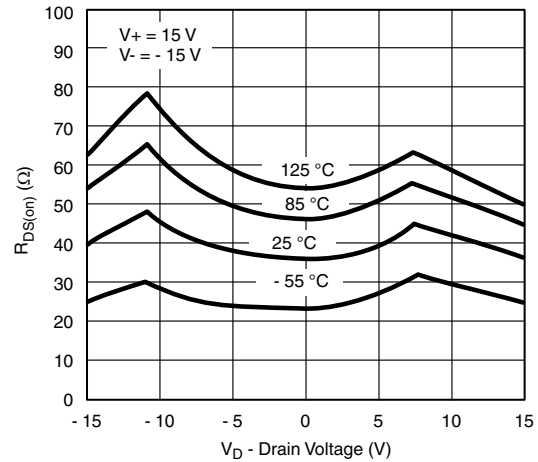


R_{DS(on)} vs. V_D and Temperature

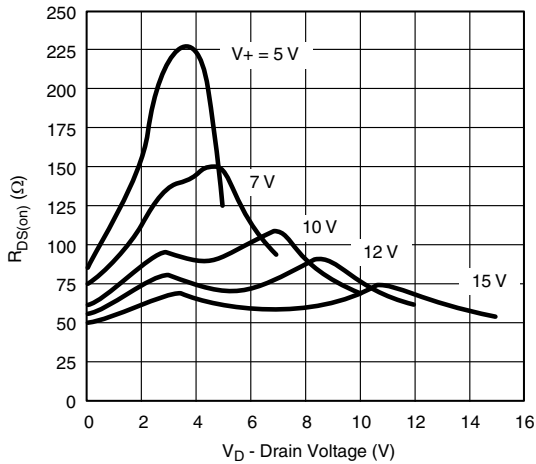


R_{DS(on)} vs. V_D and Single Power Supply Voltages

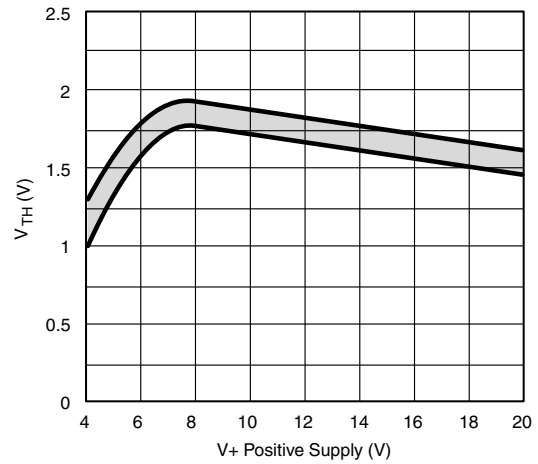

Input Switching Threshold vs. Supply Voltage

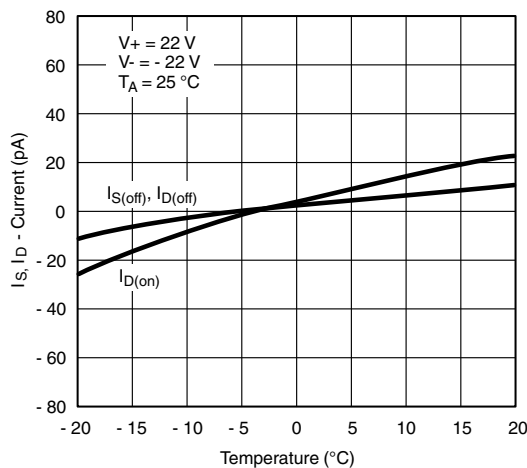


Leakage Currents vs. Analog Voltage

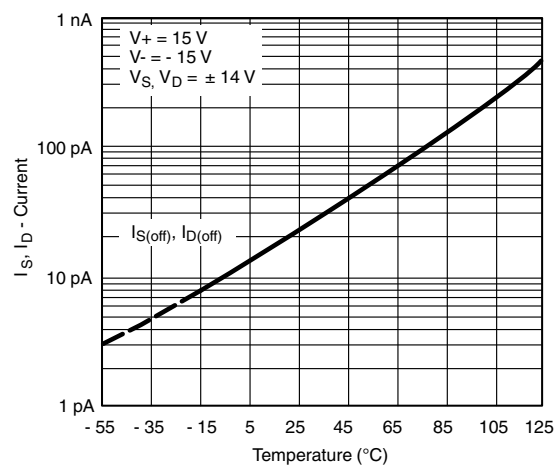


Leakage Currents vs. Temperature




TYPICAL CHARACTERISTICS (25 °C, unless otherwise noted)

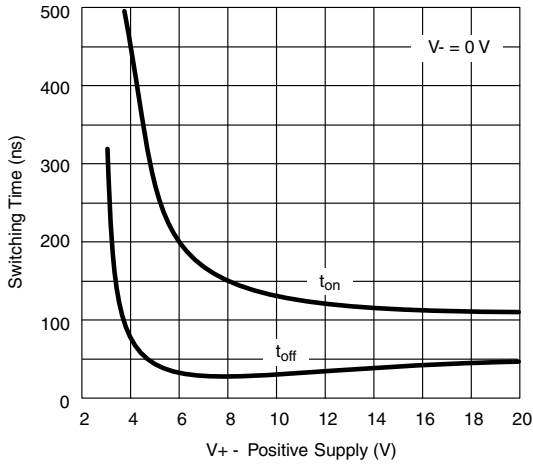


Switching Time vs. Single Supply Voltage

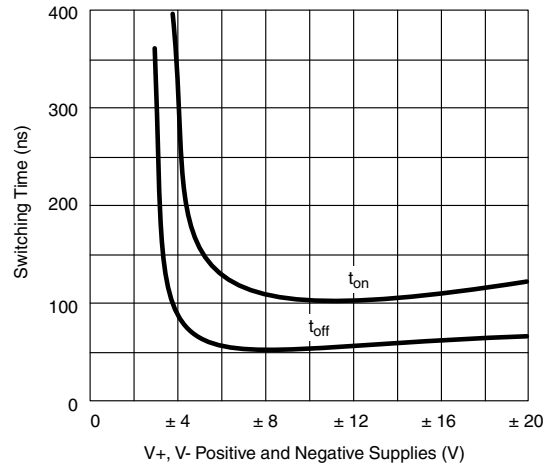


Switching Time vs. Power Supply Voltage

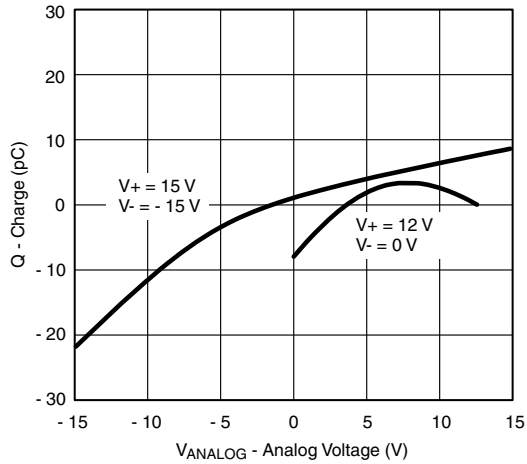

Q_S, Q_D - Charge Injection vs. Analog Voltage

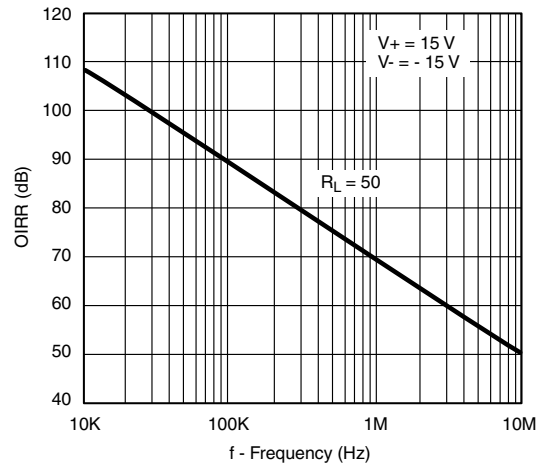

Off Isolation vs. Frequency

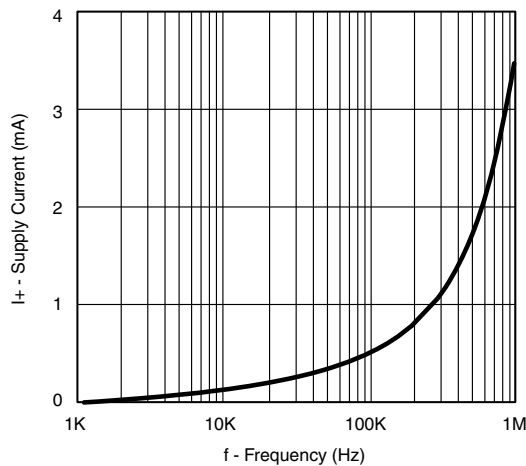

Supply Current vs. Switching Frequency

TEST CIRCUITS

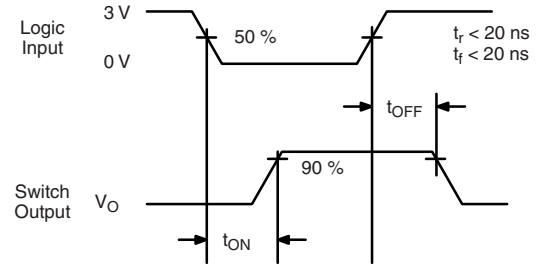
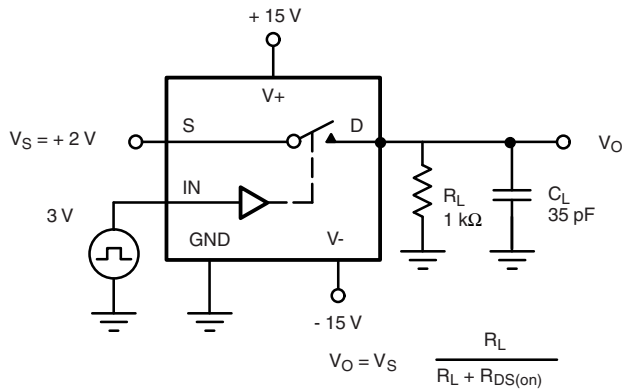


Fig. 2 - Switching Time

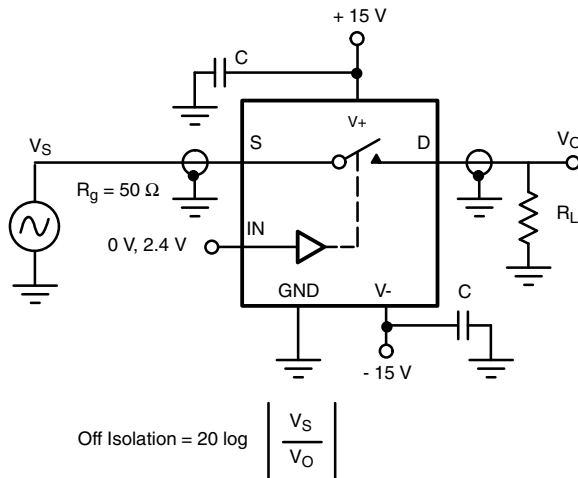


Fig. 3 - Off Isolation



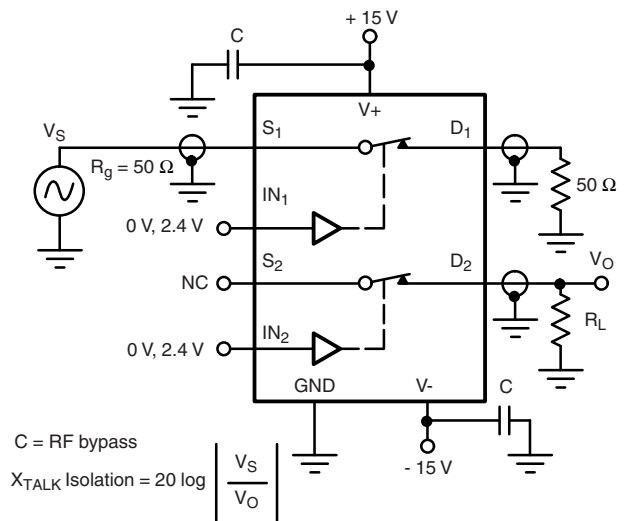


Fig. 4 - Channel-to-Channel Crosstalk

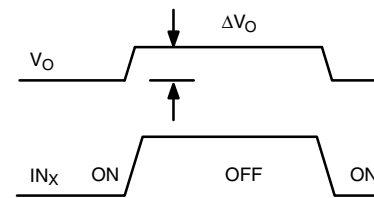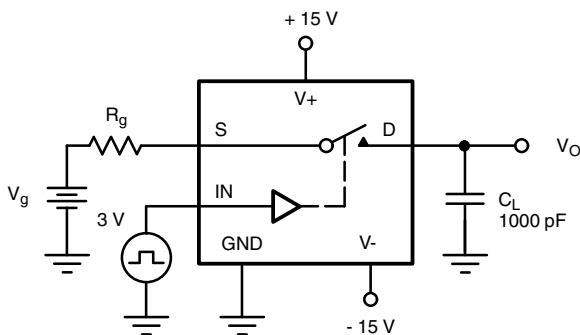

ΔV_O = measured voltage error due to charge injection
The charge injection in coulombs is $Q = C_L \times \Delta V_O$

Fig. 5 - Charge Injection

APPLICATIONS



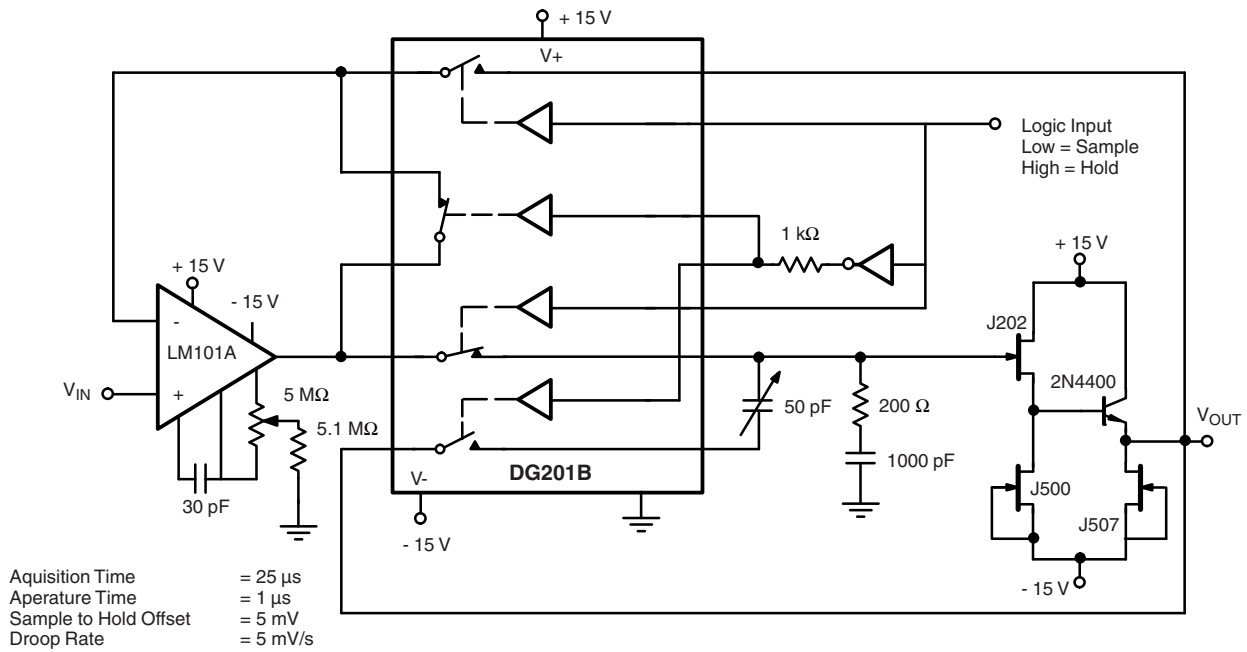


Fig. 6 - Sample-and-Hold

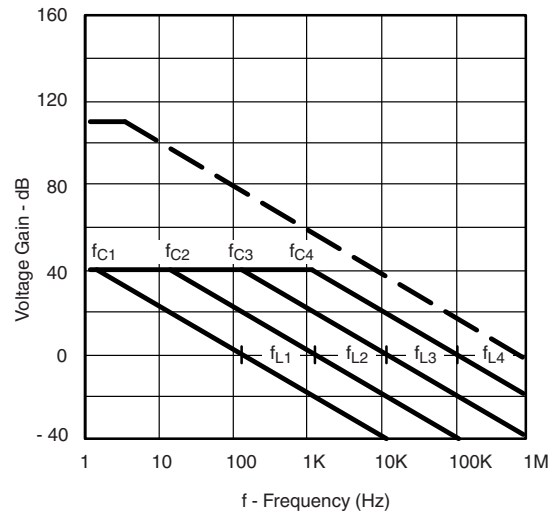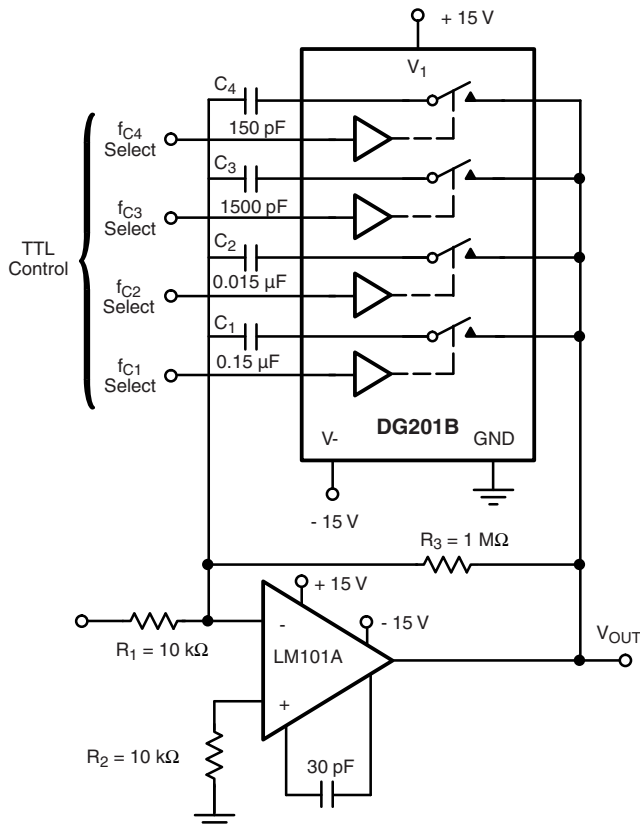

$$A_L \text{ (Voltage Gain Below Break Frequency)} = \frac{R_3}{R_1} = 100 \text{ (40 dB)}$$

$$f_C \text{ (Break Frequency)} = \frac{1}{2\pi R_3 C_X}$$

$$f_L \text{ (Unity Gain Frequency)} = \frac{1}{2\pi R_1 C_X}$$

$$\text{Max. Attenuation} = \frac{R_{DS(on)}}{10 \text{ k}\Omega} \approx -47 \text{ dB}$$

Fig. 7 - Active Low Pass Filter with Digitally Selected Break Frequency

APPLICATIONS

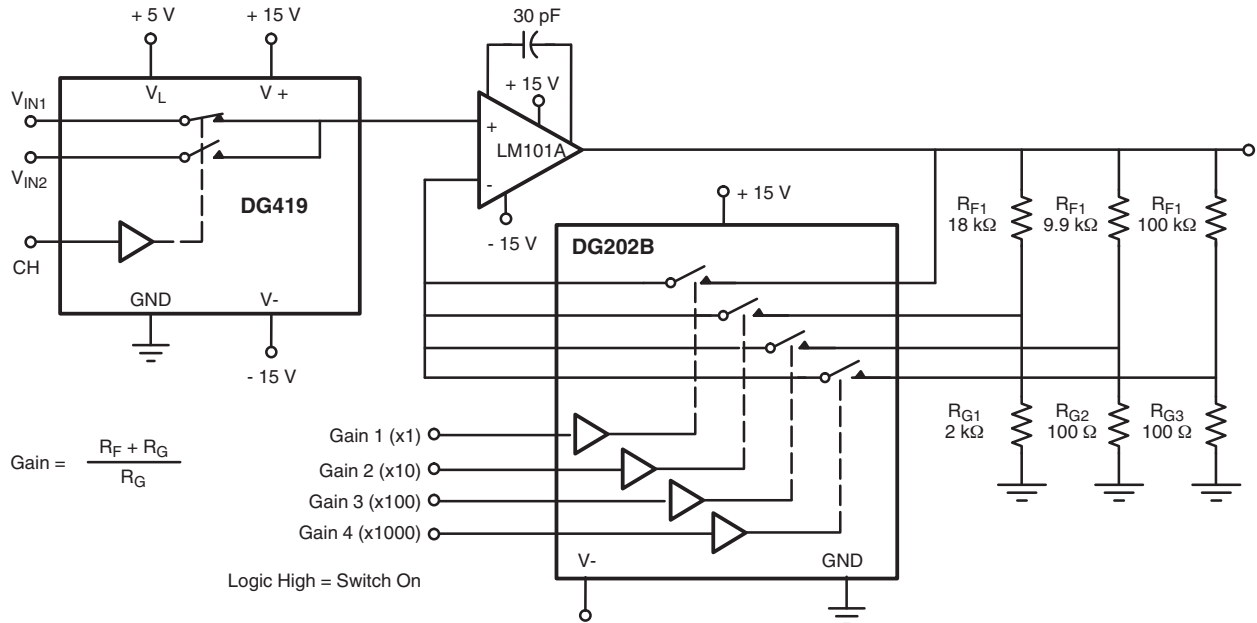


Fig. 8 - A Precision Amplifier with Digitally Programmable Input and Gains



PRODUCT SUMMARY						
Part number	DG201B	DG201B	DG201B	DG202B	DG202B	DG202B
Status code	2	2	2	2	2	2
Configuration	SPST x 4, NC	SPST x 4, NC	SPST x 4, NC	SPST x 4, NO	SPST x 4, NO	SPST x 4, NO
Single supply min. (V)	5	5	5	5	5	5
Single supply max. (V)	36	36	36	36	36	36
Dual supply min. (V)	5	5	5	5	5	5
Dual supply max. (V)	22	22	22	22	22	22
On-resistance (Ω)	45	45	45	45	45	45
Charge injection (pC)	1	1	1	1	1	1
Source on capacitance (pF)	16	16	16	16	16	16
Source off capacitance (pF)	5	5	5	5	5	5
Leakage switch on typ. (nA)	0.02	0.02	0.02	0.02	0.02	0.02
Leakage switch off max. (nA)	0.5	0.5	0.5	0.5	0.5	0.5
-3 dB bandwidth (MHz)	-	-	-	-	-	-
Package	Plastic DIP-16	SO-16 (narrow) AS	TSSOP-16	Plastic DIP-16	SO-16 (narrow) AS	TSSOP-16
Functional circuit / applications	Multi purpose, instrumentation, medical and healthcare	Multi purpose, instrumentation, medical and healthcare	Multi purpose, instrumentation, medical and healthcare	Multi purpose, instrumentation, medical and healthcare	Multi purpose, instrumentation, medical and healthcare	Multi purpose, instrumentation, medical and healthcare
Interface	Parallel	Parallel	Parallel	Parallel	Parallel	Parallel
Single supply operation	Yes	Yes	Yes	Yes	Yes	Yes
Dual supply operation	Yes	Yes	Yes	Yes	Yes	Yes
Turn on time max. (ns)	120	120	120	120	120	120
Crosstalk and off isolation	-90	-90	-90	-90	-90	-90

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package / tape drawings, part marking, and reliability data, see www.vishay.com/ppg?61554.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.