


70 A VRPower[®], Smart Power Stage With Current Sensing and Temperature Monitor

(Datasheet in Brief)

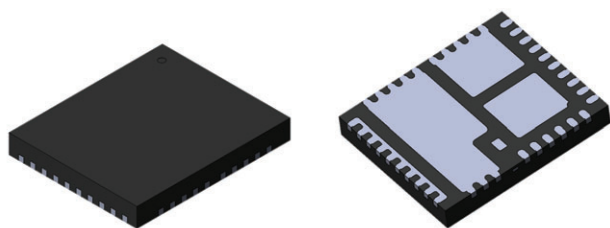

DESCRIPTION

The SiC856A/SiC857A is an integrated power stage solution optimized for synchronous buck applications to offer high current, high efficiency, and high power density. SiC856A/SiC857A integrates the gate driver, high-side MOSFET, and low-side MOSFET together to provide high performance in a small package. It enables simple voltage regulator design to deliver up to 70 A of peak current.

The internal power MOSFETs utilize Vishay's state-of-the-art TrenchFET[®] Gen V technology that delivers industry bench mark performance to significantly reduce switching and conduction losses.

The SiC856A/SiC857A incorporates an advanced MOSFET gate driver IC that features high current driving capability, adaptive dead-time control, integrated bootstrap switch, and a thermal monitor that alerts the system of excessive junction temperature. The driver is compatible with a wide range of PWM controllers, supporting 3.3 V PWM logic with tri-state. The device also integrates a current monitor to provide a real-time representation of the inductor current (I_{MON}). An on-board temperature monitor (T_{MON}) provides the system an indication of the power stage internal temperature which can be used to throttle the system operation down to a safer level if needed. The device also integrates fault protections and reporting such as over-current, over-temperature, and undervoltage.

FEATURES

- Gen IV TrenchFET technology optimized for 12 V input bus
- Integrated Schottky diode in low-side MOSFET
- 70 A peak current capability
- High frequency operation up to 1.5 MHz
- Current monitor with 5 $\mu\text{A/A}$ gain (SiC856A) or 5 mV/A (SiC857A)
- Temperature monitor output with 8 mV/ $^{\circ}\text{C}$ gain
- 3.3 V PWM with tri-state support
- Accurate positive and negative over-current protections
- Over-temperature protection
- V_{CC} / V_{DRV} / BOOT under voltage lockout
- Fault reporting and identification through T_{MON} and I_{MON}
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

APPLICATIONS

- Datacenter and server multiphase controller voltage regulators
- High-power SoC and FPGA
- DC/DC VR modules

EFFICIENCY

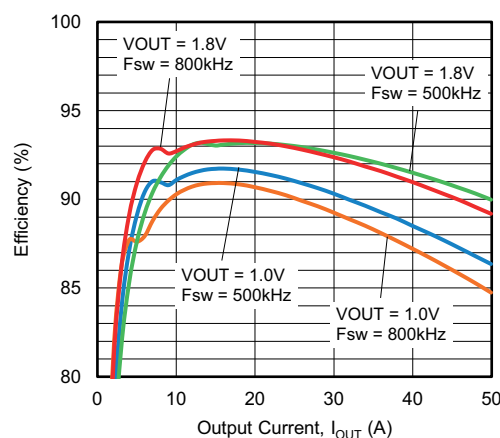



Fig. 1 - Efficiency vs. Output Current
($V_{IN} = 12\text{ V}$, $L = 100\text{ nH}$, $V_{CC} = V_{DRV} = 5\text{ V}$,
driver and inductor loss included)



PRODUCT SUMMARY		
Part number	SiC856A	SiC857A
Description	70 A smart power stage with current sensing and temperature monitor, 3.3 V PWM	70 A smart power stage with current sensing and temperature monitor, 3.3 V PWM
Input voltage min. (V)	4.5	4.5
Input voltage max. (V)	16	16
Current rating (A)	70	70
Switch frequency max. (kHz)	1500	1500
Enable (yes / no)	Yes	Yes
Monitoring features	I _{MON} , T _{MON}	I _{MON} , T _{MON}
IMON output	Current mode	Voltage mode
Protection	UVLO, OTP, OCP	UVLO, OTP, OCP
Light load mode	None	None
Pulse-width modulation (V)	3.3	3.3
Package type	MLP39-65	MLP39-65
Package size (W, L, H) (mm)	5 x 6 x 0.75	5 x 6 x 0.75
Status code	1	1
Product type	VRPower (DrMOS)	VRPower (DrMOS)
Applications	Multiphase voltage regulators	Multiphase voltage regulators

To request the full version of the datasheet, please contact: ICmarketing@vishay.com

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package / tape drawings, part marking, and reliability data, see www.vishay.com/ppg?61746.

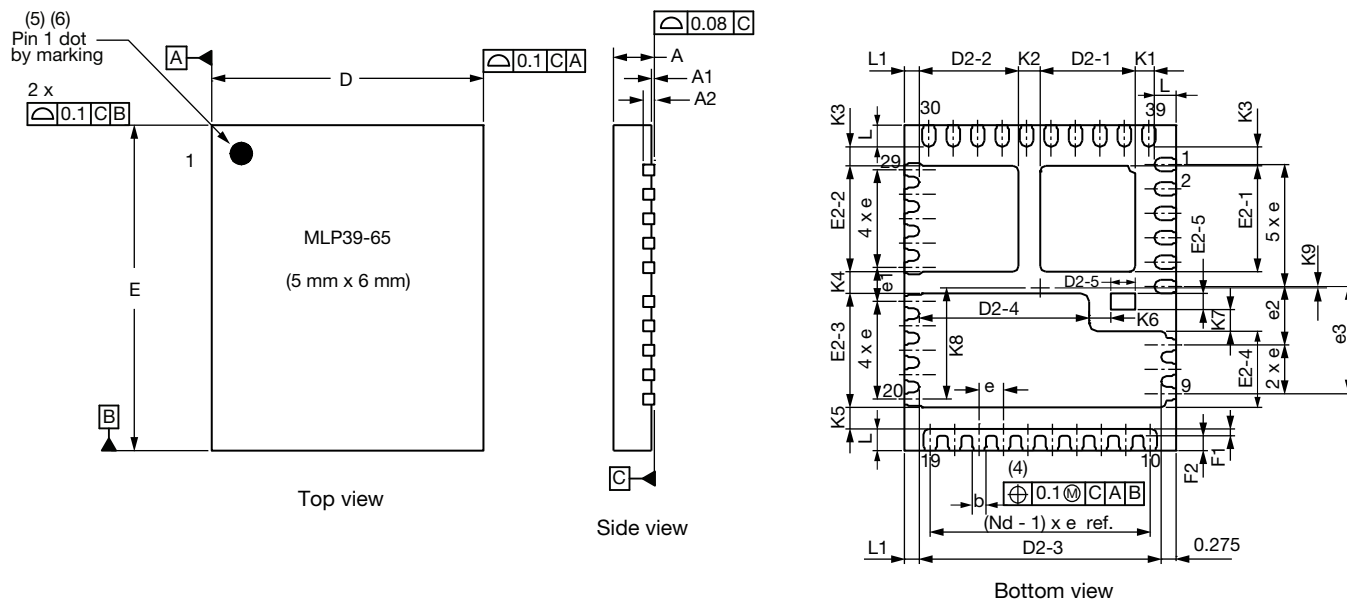
PowerPAK® MLP39-65 Case Outline


DIM.	MILLIMETERS			INCHES		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
A ⁽⁸⁾	0.65	0.75	0.85	0.026	0.030	0.033
A1	0.00	-	0.05	0.000	-	0.002
A2	0.20 ref.			0.008 ref.		
b ⁽⁴⁾	0.20	0.25	0.30	0.078	0.098	0.011
D	4.90	5.00	5.10	0.193	0.197	0.201
e	0.450 BSC			0.018 BSC		
e1	0.625 BSC			0.025 BSC		
e2	1.075 BSC			0.042 BSC		
e3	1.975 BSC			0.078 BSC		
E	5.90	6.00	6.10	0.232	0.236	0.240
D2-1	1.65	1.75	1.85	0.065	0.069	0.073
D2-2	1.73	1.83	1.93	0.068	0.072	0.076
D2-3	4.35	4.45	4.55	0.171	0.175	0.179
D2-4	3.03	3.13	3.23	0.119	0.123	0.127
D2-5	0.35	0.45	0.55	0.014	0.018	0.022
E2-1	1.85	1.95	2.05	0.073	0.077	0.081
E2-2	1.85	1.95	2.05	0.073	0.077	0.081
E2-3	2.00	2.10	2.20	0.079	0.083	0.087
E2-4	1.30	1.40	1.50	0.051	0.055	0.059
E2-5	0.20	0.30	0.40	0.008	0.012	0.016
L	0.30	0.40	0.50	0.012	0.016	0.020
L1	0.18	0.28	0.38	0.007	0.011	0.015
F1	0.125 BSC			0.005 BSC		
F2	0.275 BSC			0.011 BSC		



DIM.	MILLIMETERS			INCHES		
	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.
K1		0.35 ref.			0.014 ref.	
K2		0.40 ref.			0.016 ref.	
K3		0.35 ref.			0.014 ref.	
K4		0.40 ref.			0.016 ref.	
K5		0.40 ref.			0.016 ref.	
K6		0.40 ref.			0.016 ref.	
K7		0.40 ref.			0.016 ref.	
K8		2.048 ref.			0.081 ref.	
K9		0.025 ref.			0.001 ref.	
N ⁽³⁾		39			39	
Nd ⁽³⁾		10			10	
Ne ⁽³⁾		10			10	
ECN: T19-0296-Rev. D, 23-Sep-2019 DWG: 6074						

Notes

- (1) Use millimeters as the primary measurement
- (2) Dimensioning and tolerances conform to ASME Y14.5M. - 1994
- (3) N is the number of terminals
Nd is the number of terminals in X-direction and
Ne is the number of terminals in Y-direction
- (4) Dimension b applies to plated terminal and is measured between 0.20 mm and 0.25 mm from terminal tip
- (5) The pin #1 identifier must be existed on the top surface of the package by using indentation mark or other feature of package body
- (6) Exact shape and size of this feature is optional
- (7) Package warpage max. 0.08 mm
- (8) Applied only for terminals



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.