

SiC673

Vishay Siliconix

50 A VRPower[®] Integrated Power Stage

(Datasheet in Brief)

DESCRIPTION

The SiC673 is integrated power stage solutions optimized for synchronous buck applications to offer high current, high efficiency, and high power density performance. Packaged in Vishay's 5 mm x 5 mm MLP package, SiC673 enables voltage regulator designs to deliver up to 50 A continuous current per phase.

The internal power MOSFETs utilizes Vishay's state-of-the-art Gen IV TrenchFET[®] technology that delivers industry benchmark performance to significantly reduce switching and conduction losses.

The SiC673 incorporates an advanced MOSFET gate driver IC that features high current driving capability, adaptive dead-time control, an integrated bootstrap Schottky diode, and zero current detection to improve light load efficiency. The driver is also compatible with a wide range of PWM controllers, supports tri-state PWM, and 5 V PWM logic.

A user selectable diode emulation mode (ZCD_EN#) is included to improve the light load performance. The device also supports PS4 mode to reduce power consumption when system operates in standby state.

FEATURES

 Thermally enhanced PowerPAK[®] MLP55-31L package



RoHS

COMPLIANT

- Vishay's Gen I^V MOSFET technology and a low side MOSFET with integrated Schottky diode
- Delivers in excess of 50 A continuous current, 55 A at 10 ms peak current
- High efficiency performance
- High frequency operation up to 2 MHz
- Power MOSFETs optimized for 19 V input stage
- 5 V PWM logic with tri-state and hold-off
- Supports PS4 mode light load requirement for IMVP9 with low shutdown supply current (5 V, 3 μA)
- Under voltage lockout for V_{CIN}
- Material categorization: for definitions of compliance please see <u>www.vishay.com/doc?99912</u>

APPLICATIONS

- Multi-phase VRDs for computing, graphics card and memory
- Intel IMVP-9 VRPower delivery
 - V_{CORE}, V_{GRAPHICS}, V_{SYSTEM AGENT}
 - V_{CCGI}
- Up to 24 V rail input DC/DC VR modules

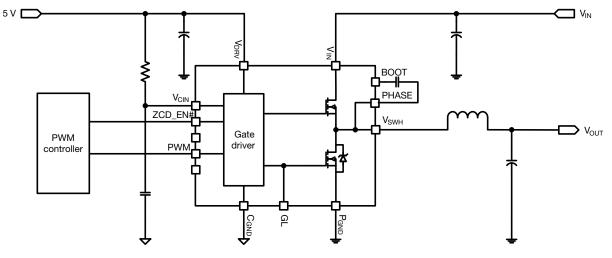


Fig. 1 - SiC673 Typical Application Diagram

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishav.com/doc?91000

TYPICAL APPLICATION DIAGRAM

www.vishay.com

SHAY

SiC673

Vishay Siliconix

PRODUCT SUMMARY	
Part number	SiC673
Description	50 A, 4.5 V to 24 V, 5 V PWM, Power stage with ZCD, with PS4 mode
Input voltage min. (V)	4.5
Input voltage max. (V)	24
Current rating (A)	50
Switch frequency max. (kHz)	2000
Enable (yes / no)	Yes
Monitoring features	None
Protection	UVLO
Light load mode	ZCD, PS4
Pulse-width modulation (V)	5
Package type	PowerPAK MLP55-31L
Package size (W, L, H) (mm)	5 x 5 x 0.7
Status code	2
Product type	VRPower (DrMOS)
Applications	Computer, industrial, networking


To request the full version of the datasheet, please contact: ICmarketing@vishay.com

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package / tape drawings, part marking, and reliability data, see www.vishay.com/ppg?63070.



Vishay Siliconix

PowerPAK[®] MLP55-31L Case Outline

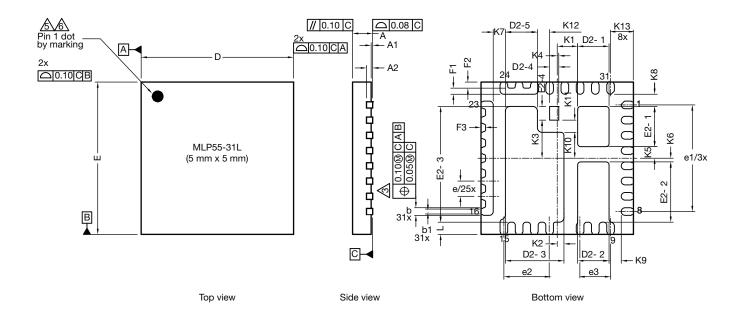

DIM.		MILLIMETERS			INCHES		
DIM.	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	
А	0.70	0.75	0.80	0.027	0.029	0.031	
A1	0.00	-	0.05	0.000	-	0.002	
A2	0.20 ref.			0.008 ref.			
b	0.20	0.25	0.30	0.078	0.098	0.011	
b1	0.15	0.20	0.25	0.006	0.008	0.010	
D	4.90	5.00	5.10	0.193	0.196	0.200	
е	0.50 BSC			0.019 BSC			
e1	3.50 BSC			0.138 BSC			
e2	1.50 BSC			0.060 BSC			
e3	1.00 BSC			0.040 BSC			
E	4.90	5.00	5.10	0.193	0.196	0.200	
L	0.35	0.40	0.45	0.013	0.015	0.017	
D2-1	0.98	1.03	1.08	0.039	0.041	0.043	
D2-2	0.98	1.03	1.08	0.039	0.041	0.043	
D2-3	1.87	1.92	1.97	0.074	0.076	0.078	
D2-4	0.30 BSC			0.012 BSC			
D2-5	1.05	1.10	1.15	0.041	0.043	0.045	
E2-1	1.27	1.32	1.37	0.050	0.052	0.054	
E2-2	1.93	1.98	2.03	0.076	0.078	0.080	
E2-3	3.75	3.80	3.85	0.148	0.150	0.152	
E2-4	0.45 BSC			0.018 BSC			
F1	0.15	0.20	0.25	0.006	0.008	0.010	
F2		0.20 ref.		0.008 ref.			
F3		0.15 ref.			0.006 ref.		

Revision: 21-Aug-17

1 For technical questions, contact: <u>powerictechsupport@vishay.com</u> Document Number: 64909

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Package Information



www.vishay.com

Vishay Siliconix

DIM		MILLIMETERS			INCHES		
DIM.	MIN.	NOM.	MAX.	MIN.	NOM.	MAX.	
K1	0.67 BSC			0.026 BSC			
K2	0.22 BSC			0.008 BSC			
K3	1.25 BSC			0.049 BSC			
K4	0.10 BSC			0.004 BSC			
K5	0.38 BSC			0.015 BSC			
K6	0.12 BSC			0.005 BSC			
K7	0.40 BSC			0.016 BSC			
K8	0.40 BSC			0.016 BSC			
K9	0.40 BSC			0.016 BSC			
K10	0.85 BSC			0.033 BSC			
K11	0.40 BSC			0.016 BSC			
K12	0.40 BSC			0.016 BSC			
K13	0.75 BSC			0.030 BSC			

Notes

1. Use millimeters as the primary measurement

2. Dimensioning and tolerances conform to ASME Y14.5M. - 1994

🖄 Dimension b applies to plated terminal and is measured between 0.20 mm and 0.25 mm from terminal tip

🖄 The pin #1 identifier must be existed on the top surface of the package by using indentation mark or other feature of package body

S Exact shape and size of this feature is optional

6. Package warpage max. 0.08 mm


Applied only for terminals




PAD Pattern


Vishay Siliconix

Recommended Land Pattern PowerPAK[®] MLP55-31L





All dimensions in millimeters

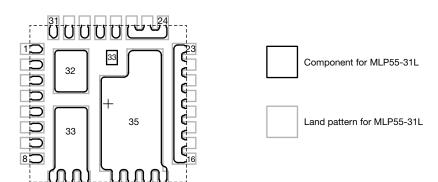

15

Document Number: 66944

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <u>www.vishay.com/doc?91000</u>



Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2025 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

Revision: 01-Jan-2025

1