
**Vishay Semiconductors** 

## **IR Receiver Modules for Remote Control Systems**



www.vishay.com

## LINKS TO ADDITIONAL RESOURCES



### DESCRIPTION

ISHA

The TSOP95...W series devices are the latest generation miniaturized IR receiver modules for infrared remote control systems. These series provide improvements in sensitivity to remote control signals in dark ambient as well as in sensitivity in the presence of optical disturbances e.g. from CFLs.

The devices contain a PIN diode and a preamplifier assembled on a lead frame. The epoxy package contains an IR filter. The demodulated output signal can be directly connected to a microprocessor for decoding.

The TSOP953..W and TSOP955..W series devices are designed to receive short burst codes (6 or more carrier cycles per burst). The third digit designates the AGC level (AGC3 or AGC5) and the last two digits designate the band-pass frequency (see table below). The higher the AGC, the better noise is suppressed, but the lower the code compatibility. AGC3 provides enhanced noise suppression and AGC5 provides maximized noise suppression. Generally, we advise to select the highest AGC that satisfactorily receives the desired remote code.

These components have not been qualified to automotive specifications.

### FEATURES

- · Improved dark sensitivity
- · Improved immunity against optical noise
- Very low supply current
- Photo detector and preamplifier in one package
- Internal filter for PCM frequency
- Supply voltage: 2.0 V to 3.6 V
- · Insensitive to supply voltage ripple and noise
- Material categorization: for definitions of compliance please see <u>www.vishay.com/doc?99912</u>

#### **MECHANICAL DATA**

1, 4 = GND, 2 = V<sub>S</sub>, 3 = OUT


## **ORDERING CODE**

#### Taping:


TSOP95...WTT - top view taped, 2200 pcs/reel TSOP95...WTR - side view taped, 2300 pcs/reel

### **BLOCK DIAGRAM**

16833-21



## **APPLICATION CIRCUIT**



 $R_1$  and  $C_1$  recommended to reduce supply ripple for  $V_S < 2.2 V$ 





Rev. 1.3, 13-Apr-2022



## PARTS TABLE

AGC		ENHANCED NOISE SUPPRESSION (AGC3)	MAXIMIZED NOISE SUPPRESSION (AGC5)	
	30 kHz	TSOP95330W	TSOP95530W	
Carrier frequency	33 kHz	TSOP95333W	TSOP95533W	
	36 kHz	TSOP95336W <sup>(1)</sup>	TSOP95536W	
	38 kHz	TSOP95338W <sup>(2)(4)</sup>	TSOP95538W	
	40 kHz	TSOP95340W	TSOP95540W	
	56 kHz	TSOP95356W	TSOP95556W <sup>(3)</sup>	
Package		Heimdall no lens		
Pinning		1, 4 = GND, 2 = V <sub>S</sub> , 3 = OUT		
Dimensions (mm)		6.8 W x 3.0 H x 2.35 D		
Mounting		SMD		
Application		Remote control		
Best choice for	t choice for (1) RCMM (2) RECS-80 Code (3) r-map (4) XMP-1, XMP-2		<sup>(3)</sup> r-map <sup>(4)</sup> XMP-1, XMP-2	
Special options		<ul> <li>Extended temperature range: <u>www.vishay.com/doc?82738</u></li> <li>Narrow optical filter: <u>www.vishay.com/doc?81590</u></li> <li>Wide optical filter: <u>www.vishay.com/doc?82726</u></li> </ul>		

Note

• 30 kHz and 33 kHz only available on written request

ABSOLUTE MAXIMUM RATINGS				
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT
Supply voltage		Vs	-0.3 to +3.6	V
Supply current		IS	3	mA
Output voltage		Vo	-0.3 to (V <sub>S</sub> + 0.3)	V
Output current		I <sub>O</sub>	5	mA
Junction temperature		Тj	100	°C
Storage temperature range		T <sub>stg</sub>	-25 to +85	°C
Operating temperature range		T <sub>amb</sub>	-25 to +85	°C
Power consumption	T <sub>amb</sub> ≤ 85 °C	P <sub>tot</sub>	10	mW


#### Note

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only
and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification
is not implied. Exposure to absolute maximum rating conditions for extended periods may affect the device reliability

<b>ELECTRICAL AND OPTICAL CHARACTERISTICS</b> ( $T_{amb} = 25 \text{ °C}$ , unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply current	$E_v = 0, V_S = 3.3 V$	I <sub>SD</sub>	0.25	0.37	0.45	mA
	$E_v = 40$ klx, sunlight	I <sub>SH</sub>	-	0.50	-	mA
Supply voltage		Vs	2.0	-	3.6	V
Transmission distance	$E_v = 0$ , test signal see Fig. 1, IR diode TSAL6200, I <sub>F</sub> = 50 mA	d	-	16	-	m
Output voltage low	$I_{OSL} = 0.5 \text{ mA}, E_e = 0.7 \text{ mW/m}^2,$ test signal see Fig. 1	V <sub>OSL</sub>	-	-	100	mV
Minimum irradiance	Test signal: XMP code	E <sub>e min.</sub>	-	0.32	0.7	mW/m <sup>2</sup>
Minimum madiance	Test signal: NEC code	E <sub>e min.</sub>	-	0.24	0.6	mW/m <sup>2</sup>
Maximum irradiance	$\begin{array}{c} t_{pi} \text{ - } 3.0/f_0 < t_{po} < t_{pi} + 3.5/f_0, \\ \text{test signal see Fig. 1} \end{array}$	E <sub>e max.</sub>	30	-	-	W/m <sup>2</sup>
Directivity	Angle of half transmission distance	φ1/2	-	± 75	-	0

Rev. 1.3, 13-Apr-2022

**Vishay Semiconductors** 



www.vishay.com

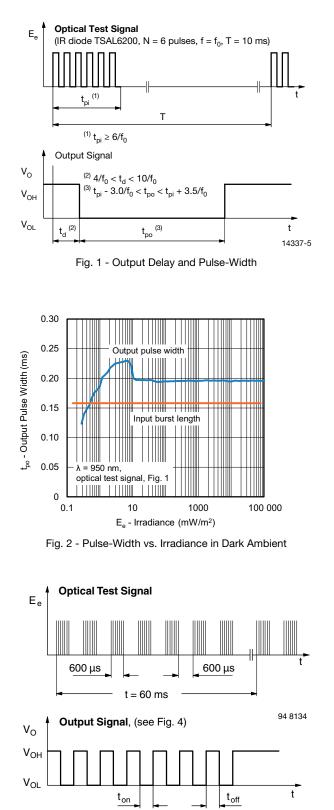


Fig. 3 - Test Signal




Fig. 4 - Pulse-Width vs. Irradiance in Dark Ambient





Fig. 5 - Frequency Dependence of Responsivity



Rev. 1.3, 13-Apr-2022

3

Document Number: 82865

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <a href="http://www.vishay.com/doc?91000">www.vishay.com/doc?91000</a>






Fig. 7 - Sensitivity vs. Supply Voltage Disturbances





Fig. 8 - Max. Envelope Duty Cycle vs. Burst Length










Fig. 9 - Sensitivity vs. Ambient Temperature









Rev. 1.3, 13-Apr-2022

4

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT <u>www.vishay.com/doc?91000</u>



Vishay Semiconductors




Fig. 12 - Sensitivity vs. Supply Voltage





## SUITABLE DATA FORMAT

This series is designed to suppress spurious output pulses due to noise or disturbance signals. The devices can distinguish data signals from noise due to differences in frequency, burst length, and envelope duty cycle. The data signal should be close to the device's band-pass center frequency (e.g. 38 kHz) and fulfill the conditions in the table below.

When a data signal is applied to the product in the presence of a disturbance, the sensitivity of the receiver is automatically reduced by the AGC to insure that no spurious pulses are present at the receiver's output. Some examples which are suppressed are:

- DC light (e.g. from tungsten bulbs sunlight)
- · Continuous signals at any frequency
- Strongly or weakly modulated patterns from fluorescent lamps with electronic ballasts (see Fig. 13 or Fig. 14)




Fig. 13 - IR Emission from Fluorescent Lamp With Low Modulation




Fig. 14 - IR Emission from Fluorescent Lamp With High Modulation

	TSOP953W	TSOP955W
Minimum burst length	6 cycles/burst	6 cycles/burst
After each burst of length A gap time is required of	6 to 20 cycles ≥ 8 cycles	6 to 38 cycles ≥ 8 cycles
For bursts greater than a minimum gap time in the data stream is needed of	20 cycles > 6 x burst length	38 cycles > 20 ms
Maximum number of continuous short bursts/second	2500	2500
RCMM code	Preferred	Yes
XMP-1 code	Preferred	Yes
r-map code	Yes	Preferred
RECS-80 code	Preferred	Yes
Suppression of interference from fluorescent lamps	Fig. 13 and Fig. 14	Fig. 13 and Fig. 14


#### Note

• For data formats with long bursts (more than 10 carrier cycles) please see the datasheet for TSOP952..W, TSOP954..W, or TSOP956..W



**Vishay Semiconductors** 

## **PACKAGE DIMENSIONS** in millimeters

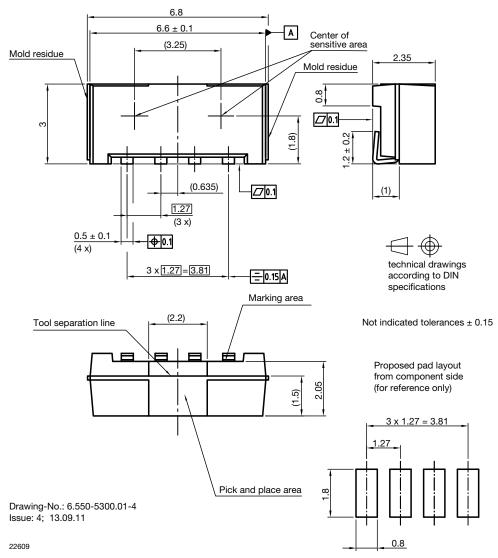

## **ASSEMBLY INSTRUCTIONS**

#### **Reflow Soldering**

- Reflow soldering must be done within 72 h while stored under a max. temperature of 30 °C, 60 % RH after opening the dry pack envelope
- Set the furnace temperatures for pre-heating and heating in accordance with the reflow temperature profile as shown in the diagram. Exercise extreme care to keep the maximum temperature below 260 °C. The temperature shown in the profile means the temperature at the device surface. Since there is a temperature difference between the component and the circuit board, it should be verified that the temperature of the device is accurately being measured
- Handling after reflow should be done only after the work surface has been cooled off

### Manual Soldering


- Use a soldering iron of 25 W or less. Adjust the temperature of the soldering iron below 300 °C
- Finish soldering within 3 s
- Handle products only after the temperature has cooled off

Rev. 1.3, 13-Apr-2022







### **VISHAY LEAD (Pb)-FREE REFLOW SOLDER PROFILE**



## TAPING VERSION TSOP..TR DIMENSIONS in millimeters



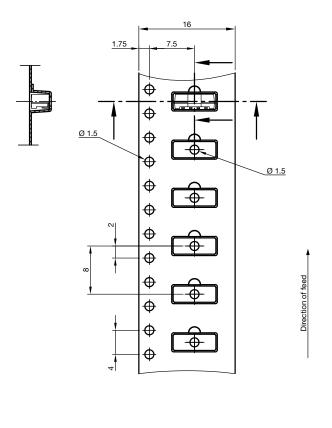

technical drawings according to DIN specifications


Drawing-No.: 9.700-5342.01-4 Issue: 2; 12.06.13


Rev. 1.3, 13-Apr-2022

Document Number: 82865



## TAPING VERSION TSOP..TT DIMENSIONS in millimeters



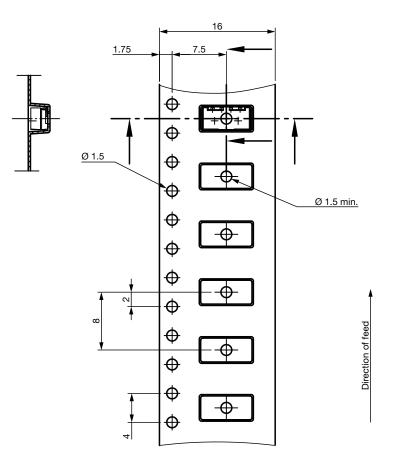




technical drawings according to DIN specifications

Drawing-No.: 9.700-5341.01-4 Issue: 3; 06.10.15



## **REEL DIMENSIONS** in millimeters

## **Vishay Semiconductors**

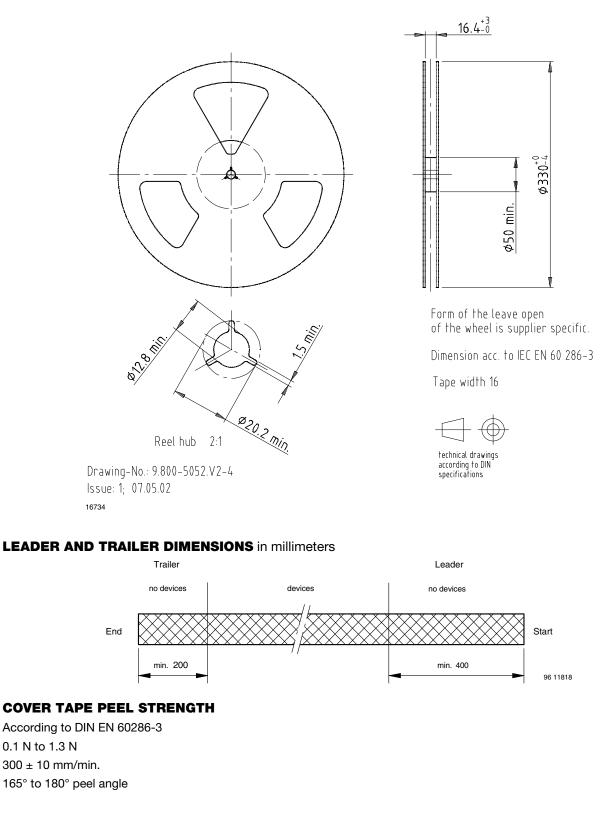

Rev. 1.3, 13-Apr-2022


0.1 N to 1.3 N





## **OUTER PACKAGING**

The sealed reel is packed into a pizza box.

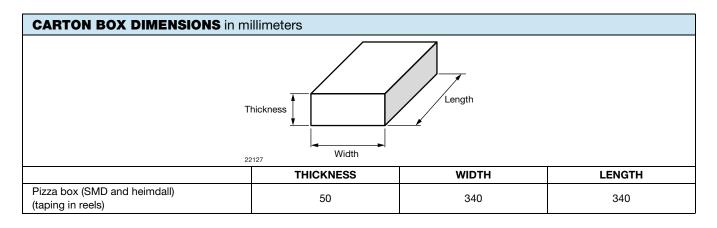

## LABEL

#### Standard bar code labels for finished goods

The standard bar code labels are product labels and used for identification of goods. The finished goods are packed in final packing area. The standard packing units are labeled with standard bar code labels before transported as finished goods to warehouses. The labels are on each packing unit and contain Vishay Semiconductor GmbH specific data.


VISHAY SEMICONDUCTOR GmbH STANDARD BAR CODE PRODUCT LABEL (finished goods)				
PLAIN WRITING	ABBREVIATION	LENGTH		
Item-description	-	18		
Item-number	INO	8		
Selection-code	SEL	3		
LOT-/serial-number	BATCH	10		
Data-code	COD	3 (YWW)		
Plant-code	PTC	2		
Quantity	QTY	8		
Accepted by	ACC	-		
Packed by	PCK	-		
Mixed code indicator	MIXED CODE	-		
Origin	xxxxxx+	Company logo		
LONG BAR CODE TOP	ТҮРЕ	LENGTH		
Item-number	Ν	8		
Plant-code	Ν	2		
Sequence-number	Х	3		
Quantity	Ν	8		
Total length	-	21		
SHORT BAR CODE BOTTOM	ТҮРЕ	LENGTH		
Selection-code	Х	3		
Data-code	Ν	3		
Batch-number	Х	10		
Filter	-	1		
Total length	-	17		

Rev. 1.3, 13-Apr-2022



## **DRY PACKING**

The reel is packed in an anti-humidity bag to protect the devices from absorbing moisture during transportation and storage.

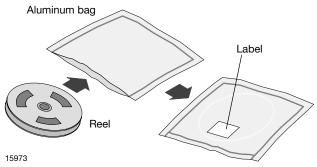

## **FINAL PACKING**

The sealed reel is packed into a cardboard box.

## **RECOMMENDED METHOD OF STORAGE**

Dry box storage is recommended as soon as the aluminum bag has been opened to prevent moisture absorption. The following conditions should be observed, if dry boxes are not available:

- Storage temperature 10 °C to 30 °C
- Storage humidity  $\leq$  60 % RH max.

After more than 72 h under these conditions moisture content will be too high for reflow soldering.


In case of moisture absorption, the devices will recover to the former condition by drying under the following condition:

192 h at 40 °C + 5 °C / - 0 °C and < 5 % RH (dry air / nitrogen) or

96 h at 60  $^\circ\text{C}$  + 5  $^\circ\text{C}$  and < 5 % RH for all device containers or

24 h at 125 °C + 5 °C not suitable for reel or tubes.

An EIA JEDEC<sup>®</sup> standard J-STD-020 level 4 label is included on all dry bags.



EIA JEDEC standard J-STD-020 level 4 label is included on all dry bags

Rev. 1.3, 13-Apr-2022

12

## ESD PRECAUTION

Proper storage and handling procedures should be followed to prevent ESD damage to the devices especially when they are removed from the antistatic shielding bag. Electrostatic sensitive devices warning labels are on the packaging.

## VISHAY SEMICONDUCTORS STANDARD BAR CODE LABELS

The Vishay Semiconductors standard bar code labels are printed at final packing areas. The labels are on each packing unit and contain Vishay Semiconductors specific data.





Vishay

# Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2025 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

Revision: 01-Jan-2025