



## Single ESD-Protection Diode in SOD-523



20278



19344

### MARKING (example only)



20279

Bar = cathode marking

X = date code

Y = type code (see table below)

### LINKS TO ADDITIONAL RESOURCES


[3D Models](#)

### FEATURES

- Compact SOD-523 package
- Low package height < 0.7 mm
- 1-line ESD-protection
- AEC-Q101 qualified
- Working range 5 V
- Low leakage current  $I_R < 0.1 \mu A$
- Capacitance typical  $C_D = 12 \text{ pF}$
- ESD-protection acc. IEC 61000-4-2
  - ± 30 kV contact discharge
  - ± 30 kV air discharge
- Lead plating: Sn (e3)
  - soldering can be checked by standard vision inspection
  - AOI = automated optical inspection
  - no X-ray necessary
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



ORDERING INFORMATION					
PART NUMBER (EXAMPLE)	AEC-Q101 QUALIFIED	ENVIRONMENTAL AND QUALITY CODE			ORDERING CODE (EXAMPLE)
		RoHS COMPLIANT + LEAD (Pb)-FREE TERMINATIONS	TIN PLATED	8K PER 7" REEL (8 mm TAPE)	
		GREEN		MOQ = 8K/BOX	
VESD05B1-02V	-	G	3	-08	VESD05B1-02V-G3-08
VESD05B1-02V	H	G	3	-08	VESD05B1-02VHG3-08

PACKAGE DATA						
DEVICE NAME	PACKAGE NAME	TYPE CODE	WEIGHT	MOLDING COMPOUND FLAMMABILITY RATING	MOISTURE SENSITIVITY LEVEL	SOLDERING CONDITIONS
VESD05B1-02V	SOD-523	. H	1.32 mg	UL 94 V-0	MSL level 1 (according J-STD-020)	Peak temperature max. 260 °C

ABSOLUTE MAXIMUM RATINGS					
PARAMETER	TEST CONDITIONS		SYMBOL	VALUE	UNIT
Peak pulse current	Acc. IEC 61000-4-5, 8/20 $\mu s$ /single shot		$I_{PPM}$	3.5	A
Peak pulse power	Acc. IEC 61000-4-5, 8/20 $\mu s$ /single shot		$P_{PP}$	40	W
ESD immunity	Contact discharge acc. IEC 61000-4-2; 10 pulses		$V_{ESD}$	± 30	kV
	Air discharge acc. IEC 61000-4-2; 10 pulses			± 30	kV
Operating temperature	Junction temperature		$T_J$	-55 to +150	°C
Storage temperature			$T_{stg}$	-55 to +150	°C


**BiAs-MODE** (bidirectional asymmetrical protection mode)

With the VESD05B1-02V one signal- or data-lines (L1) can be protected against voltage transients. With pin 1 connected to ground and pin 2 connected to a signal- or data-line which has to be protected. As long as the voltage level on the data- or signal-line is between 0 V (ground level) and the specified maximum reverse working voltage ( $V_{RWM}$ ) the protection diode between data line and ground offers a high isolation to the ground line. The protection device behaves like an open switch.

As soon as any positive transient voltage signal exceeds the break down voltage level of the protection diode, the diode becomes conductive and shorts the transient current to ground. Now the protection device behaves like a closed switch. The clamping voltage ( $V_C$ ) is defined by the break down voltage ( $V_{BR}$ ) level plus the voltage drop at the series impedance (resistance and inductance) of the protection device.

Any negative transient signal will be clamped accordingly. The negative transient current is flowing in the forward direction of the protection diode. The low forward voltage ( $V_F$ ) clamps the negative transient close to the ground level.

Due to the different clamping levels in forward and reverse direction the VESD05B1-02V clamping behavior is bidirectional and asymmetrical (BiAs).

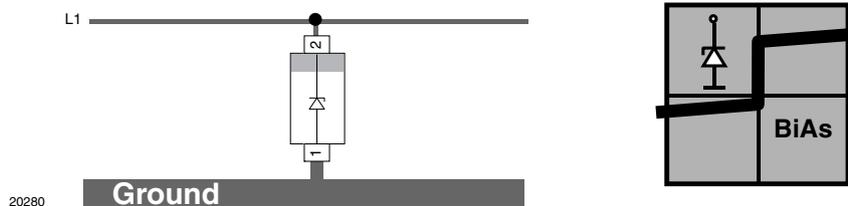

20280

<b>ELECTRICAL CHARACTERISTICS</b> ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified)						
PARAMETER	TEST CONDITIONS/REMARKS	SYMBOL	MIN.	TYP.	MAX.	UNIT
Protection paths	Number of lines which can be protected	$N_{channel}$	-	-	1	lines
Reverse stand off voltage	Max. reverse working voltage	$V_{RWM}$	-	-	5	V
Reverse voltage	At $I_R = 0.1\text{ }\mu\text{A}$	$V_R$	5	-	-	V
Reverse current	At $V_R = 5\text{ V}$	$I_R$	-	0.01	0.1	$\mu\text{A}$
Reverse breakdown voltage	At $I_R = 1\text{ mA}$	$V_{BR}$	6	6.8	7.5	V
Reverse clamping voltage	At $I_{PP} = 1\text{ A}$ , $t_p = 300\text{ }\mu\text{s}$	$V_C$	-	7.2	9.5	V
	At $I_{PP} = I_{PPM} = 3.5\text{ A}$ , $t_p = 8/20\text{ }\mu\text{s}$	$V_C$	-	8.6	11	V
Forward clamping voltage	At $I_{PP} = 0.2\text{ A}$ , $t_p = 300\text{ }\mu\text{s}$	$V_F$	-	0.95	1.2	V
	At $I_{PP} = 1\text{ A}$ , $t_p = 300\text{ }\mu\text{s}$	$V_F$	-	1.3	-	V
	At $I_{PP} = I_{PPM} = 3.5\text{ A}$ , $t_p = 300\text{ }\mu\text{s}$	$V_F$	-	1.9	-	V
Dynamic resistance	$t_p = 100\text{ ns}$ (TLP); pin 1-2	$r_{dyn}$	-	0.2	-	$\Omega$
	$t_p = 100\text{ ns}$ (TLP); pin 2-1		-	0.31	-	$\Omega$
Capacitance	At $V_R = 0\text{ V}$ ; $f = 1\text{ MHz}$	$C_D$	-	19	23	pF
	At $V_R = 2.5\text{ V}$ ; $f = 1\text{ MHz}$	$C_D$	-	12	-	pF

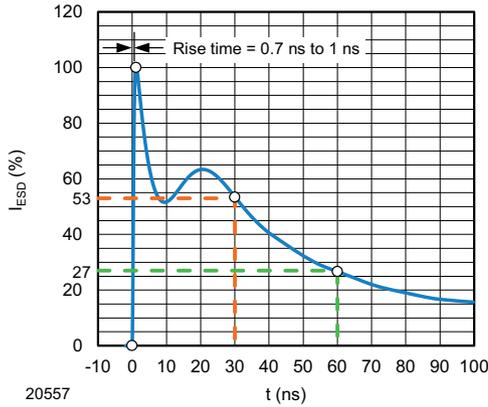


Fig. 1 - ESD Discharge Current Wave Form acc. IEC 61000-4-2 (330 Ω / 150 pF)

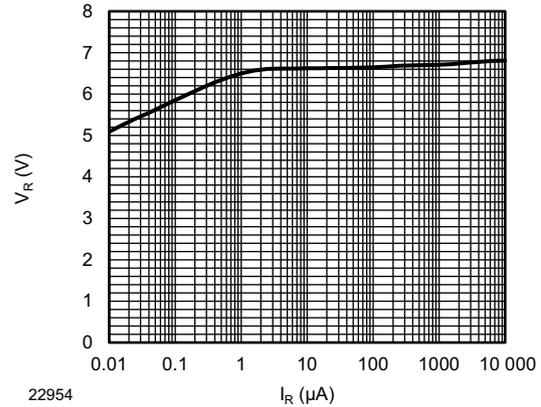


Fig. 4 - Typical Reverse Voltage vs. Reverse Current

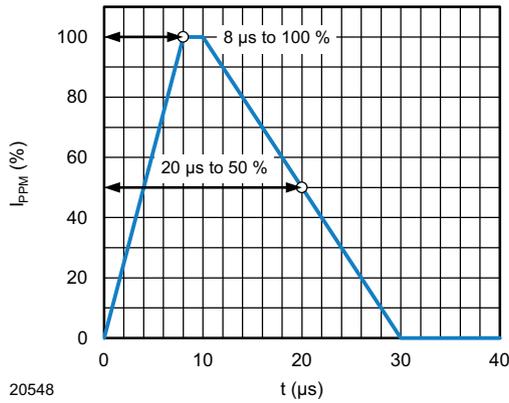


Fig. 2 - 8/20 μs Peak Pulse Current Wave Form acc. IEC 61000-4-5

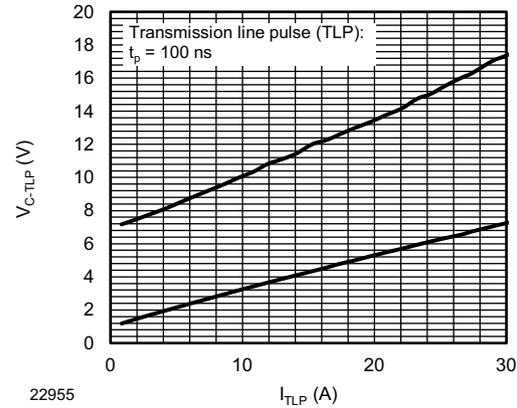


Fig. 5 - Typical Clamping Voltage vs. Peak Pulse Current

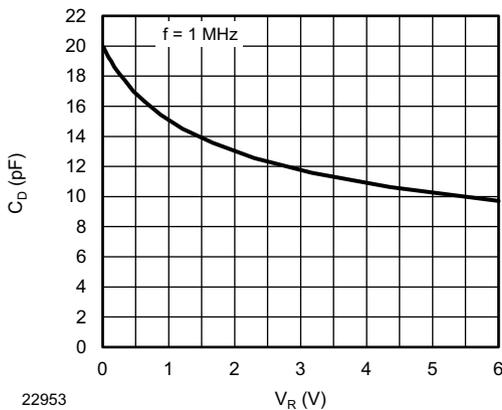


Fig. 3 - Typical Capacitance vs. Reverse Voltage



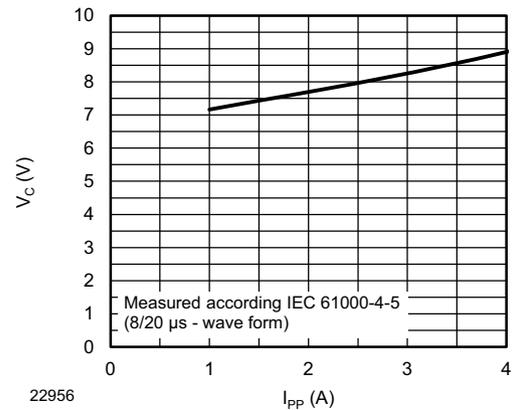



Fig. 6 - Typical Peak Clamping Voltage vs. Peak Pulse Current



PACKAGE DIMENSIONS in millimeters [inches]: SOD-523

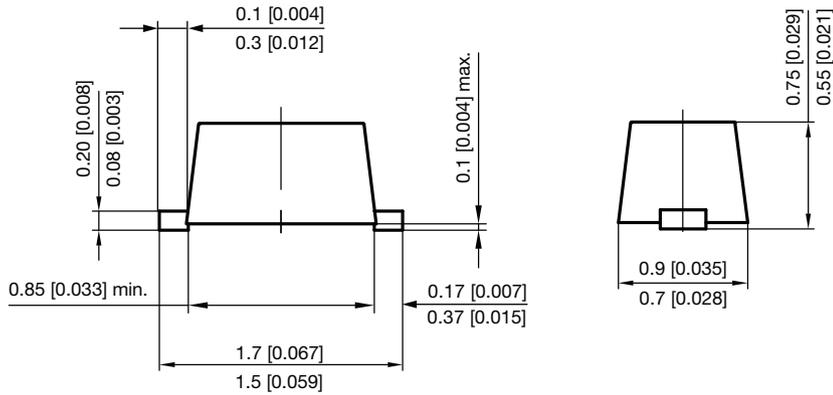


Footprint recommendation:

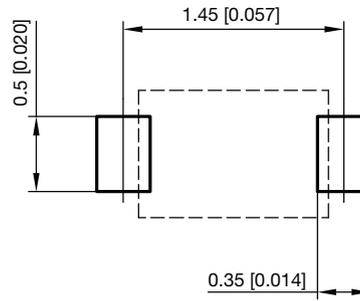

Document no.: S8-V-3880.02-003 (4)  
 Created - Date: 04. April 2017  
 Rev. 4 - Date: 03. Aug. 2020  
 23093




CARRIER TAPE SOD-523

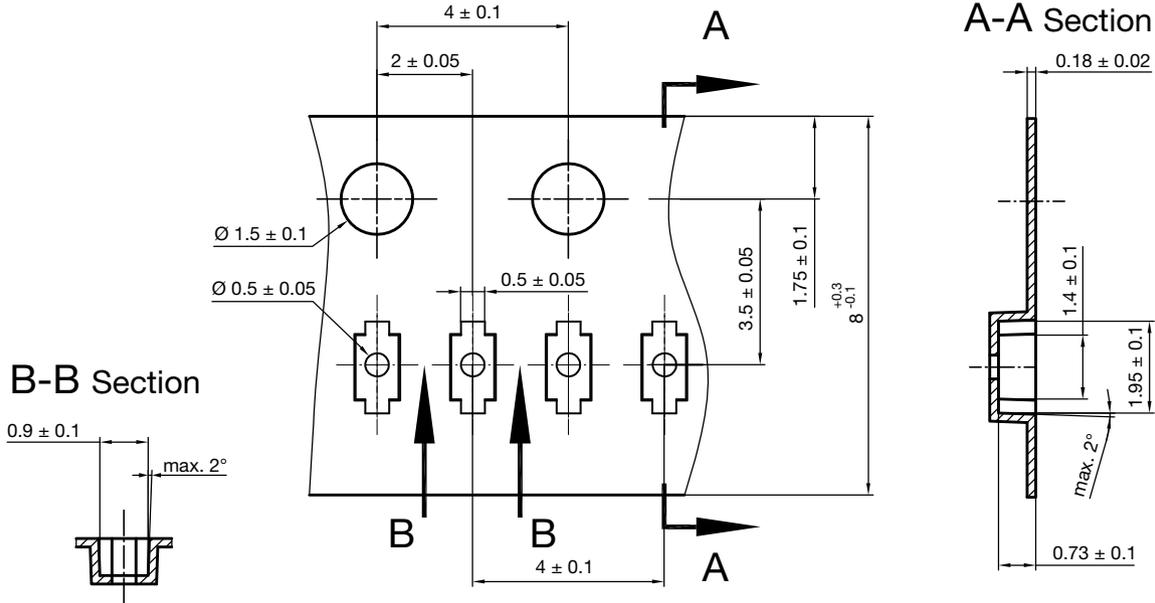

S8-V-3717.03-005 (4)  
05.07.2018  
22959

ORIENTATION IN CARRIER TAPE SOD-523

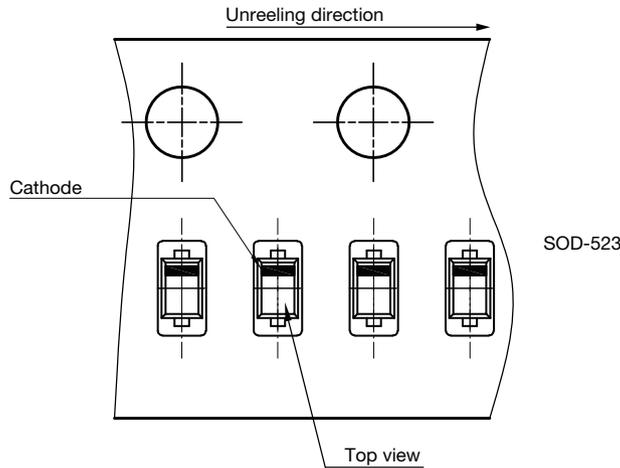

S8-V-3717.03-006 (4)  
05.07.2018  
22958



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.