


R-C Thermal Model Parameters

DESCRIPTION

The parametric values in the R-C thermal model have been derived using curve-fitting techniques. R-C values for the electrical circuit in the Foster/tank and Cauer/filter configurations are included. When implemented in PSpice, these values have matching characteristic curves to the single-pulse transient thermal impedance curves for the MOSFET.

These RC values can be used in the PSpice simulation to evaluate the thermal behavior of the MOSFET junction temperature under a defined power profile. These techniques are described in application note AN609, "Thermal Simulation of Power MOSFETs on the PSpice Platform".

R-C THERMAL MODEL FOR TANK CONFIGURATION

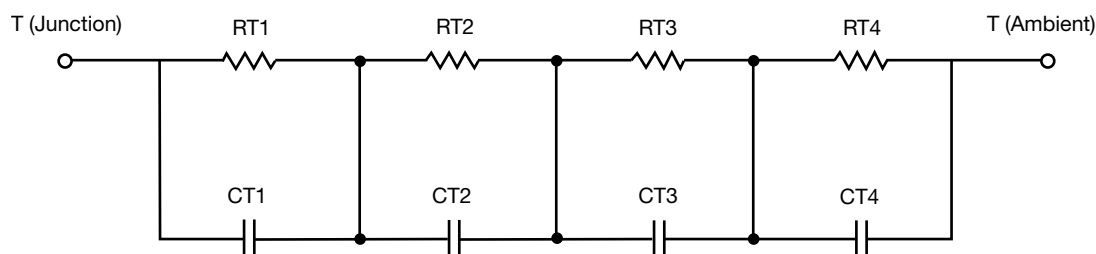

R-C VALUES FOR TANK CONFIGURATION

THERMAL RESISTANCE (°C/W)			
Junction to	Ambient	Case	Foot
RT1	n/a	84.0310m	n/a
RT2	n/a	393.7256m	n/a
RT3	n/a	414.1244u	n/a
RT4	n/a	125.8465m	n/a
THERMAL CAPACITANCE (Joules/°C)			
Junction to	Ambient	Case	Foot
CT1	n/a	6.9776m	n/a
CT2	n/a	142.0246m	n/a
CT3	n/a	128.9289m	n/a
CT4	n/a	13.6366m	n/a


Note

- n/a indicates not applicable

This document is intended as a SPICE modeling guideline and does not constitute a commercial product datasheet. Designers should refer to the appropriate datasheet of the same number for guaranteed specification limits.



R-C THERMAL MODEL FOR FILTER CONFIGURATION

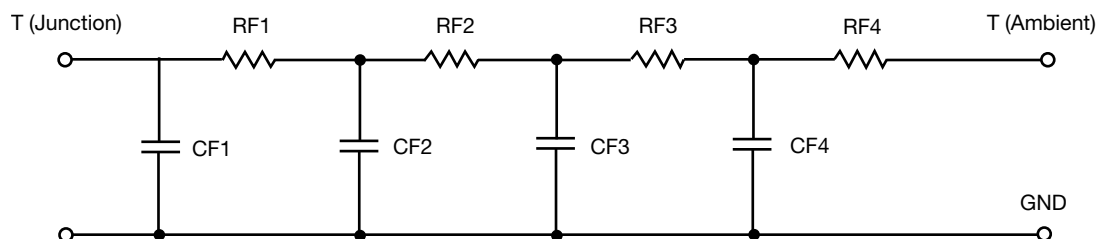

R-C VALUES FOR FILTER CONFIGURATION

THERMAL RESISTANCE (°C/W)			
Junction to	Ambient	Case	Foot
RF1	n/a	55.6529m	n/a
RF2	n/a	162.0580m	n/a
RF3	n/a	303.6904m	n/a
RF4	n/a	82.2998m	n/a
THERMAL CAPACITANCE (Joules/°C)			
Junction to	Ambient	Case	Foot
CF1	n/a	3.4768m	n/a
CF2	n/a	2.2810m	n/a
CF3	n/a	134.3963m	n/a
CF4	n/a	2.7256m	n/a

Note

- n/a indicates not applicable

