

Hyperfast Rectifier, 6 A FRED Pt®



LINKS TO ADDITIONAL RESOURCES



PRIMARY CHARACTERISTICS				
I _{F(AV)}	6 A			
V_{R}	600 V			
V _F at I _F	1.26 V			
t _{rr} (typ.)	14 ns			
T _J max.	175 °C			
Package	SlimDPAK (TO-252AE)			
Circuit configuration	Single			

FEATURES

- Hyperfast recovery time, reduced Q_{rr} recovery
- For PFC CCM operation
- · Low forward voltage drop, low power losses
- Low leakage current

 Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C



AUTOMOTIVE

- AEC-Q101 qualified
 - Automotive ordering code: base P/NHM3, meets JESD 201 class 2 whisker test
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

TYPICAL APPLICATIONS

These devices are intended for use in PFC boost stage in the AC/DC section of SMPS inverters, or as freewheeling diodes. Their extremely optimized stored charge and low recovery current minimize the switching losses and reduce over dissipation in the switching element and snubbers.

MECHANICAL DATA

Case: SlimDPAK (TO-252AE)

Molding compound meets UL 94 V-0 flammability rating

Terminals: matte tin plated leads, solderable per

J-STD-002

ABSOLUTE MAXIMUM RATINGS					
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS	
Peak repetitive reverse voltage	V_{RRM}		600	V	
Average rectified forward current	I _{F(AV)}	T _C = 140 °C	6	Λ	
Non-repetitive peak surge current	I _{FSM}	$T_J = 25$ °C, 10 ms sine pulse wave	50	A	
Operating junction and storage temperatures	T _J , T _{Stg}		-55 to +175	°C	

ELECTRICAL SPECIFICATIONS (T _J = 25 °C unless otherwise specified)						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Breakdown voltage, blocking voltage	V _{BR} , V _R	$I_R = 100 \mu A$	600	-	-	.,
Forward voltage V _F		I _F = 6 A	-	2.5	3.10	V
	I _F = 6 A, T _J = 150 °C	-	1.65	1.90		
Reverse leakage current	I _R	$V_R = V_R$ rated	-	-	5	
		T _J = 150 °C, V _R = V _R rated	-	-	250	μA
Junction capacitance	C _T	V _R = 600 V	-	10	-	pF



DYNAMIC RECOVERY CHARACTERISTICS (T _J = 25 °C unless otherwise specified)							
PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNITS
	t _{rr}	$I_F = 1 \text{ A, } dI_F/dt = 50 \text{ A/}\mu\text{s, } V_R = 30 \text{ V}$		-	16	-	ns
		$I_F = 1 \text{ A}, dI_F/dt = 100 \text{ A/}\mu\text{s}, V_R = 30 \text{ V}$		-	14	-	
Reverse recovery time		I _F = 0.5 A, I _R = 1 A, I _{RR} = 0.25 A		-	-	18	
		T _J = 25 °C	I _F = 6 A dI _F /dt = 500 A/μs V _R = 400 V	-	19	-	- A
		T _J = 125 °C		-	40	-	
Peak recovery current	I _{RRM}	T _J = 25 °C		-	3.8	-	
		T _J = 125 °C		-	6.3	-	
Daverse receives aboves	Q _{rr}	T _J = 25 °C		-	40	-	nC
Reverse recovery charge		T _J = 125 °C		-	140	-	

THERMAL - MECHANICAL SPECIFICATIONS						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Maximum junction and storage temperature range	T _J , T _{Stg}		-55	-	175	°C
Thermal resistance, junction to mount	R_{thJM}		-	-	2.5	°C/W
Weight			-	0.20	-	g
Marking device		Case style SlimDPAK (TO-252AE)		6EV	'X06	




Fig. 1 - Typical Forward Voltage Drop Characteristics




Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage




Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage

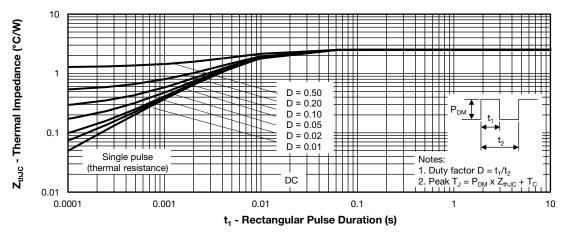


Fig. 4 - Maximum Thermal Impedance Z_{thJC} Characteristics




Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current




Fig. 6 - Forward Power Loss Characteristics

Note

 $[\]begin{array}{ll} \text{(1)} & \text{Formula used: } T_C = T_J - (Pd + Pd_{REV}) \times R_{thJC}; \\ Pd = \text{forward power loss} = I_{F(AV)} \times V_{FM} \text{ at } (I_{F(AV)}/D) \text{ (see fig. 6)}; \\ Pd_{REV} = \text{inverse power loss} = V_{R1} \times I_R \text{ (1 - D)}; I_R \text{ at } V_{R1} = \text{rated } V_R \\ \end{array}$

www.vishay.com

Vishay Semiconductors




Fig. 7 - Typical Reverse Recovery Time vs. dl_F/dt





Fig. 8 - Typical Stored Charge vs. dl_E/dt

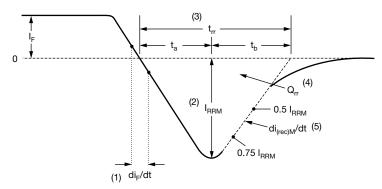

- (1) di_F/dt rate of change of current through zero crossing
- (2) I_{RRM} peak reverse recovery current
- (3) t_{rr} reverse recovery time measured from zero crossing point of negative going I_F to point where a line passing through 0.75 I_{RRM} and 0.50 I_{RRM} extrapolated to zero current.
- (4) Q_{rr} area under curve defined by t_{rr} and I_{RRM}

$$Q_{rr} = \frac{t_{rr} \times I_{RRM}}{2}$$


(5) $di_{(rec)M}/dt$ - peak rate of change of current during t_b portion of t_{rr}

Fig. 9 - Reverse Recovery Waveform and Definitions



ORDERING INFORMATION TABLE

Device code



1 - Vishay Semiconductors product

2 - Current rating (6 = 6 A)

3 - Circuit configuration:

E = single die

4 - V = SlimDPAK

5 - Process type:

X = hyperfast recovery

6 - Voltage code (06 = 600 V)

7 - H = AEC-Q101 qualified

8 - Environmental digit:

M3 = halogen-free, RoHS-compliant, and terminations lead (Pb)-free


ORDERING INFORMATION (Example)					
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	PACKAGING DESCRIPTION	
VS-6EVX06HM3/I	0.20	1	4500	13"diameter plastic tape and reel	


LINKS TO RELATED DOCUMENTS				
Dimensions www.vishay.com/doc?96081				
Part marking information	www.vishay.com/doc?96085			
Packaging information	www.vishay.com/doc?88869			




SlimDPAK


DIMENSIONS in inches (millimeters)

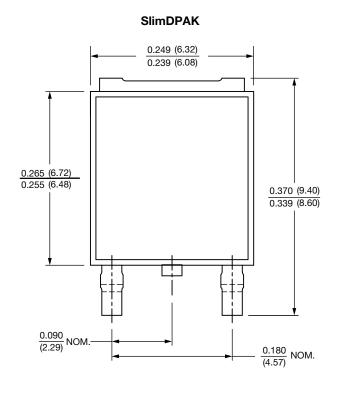

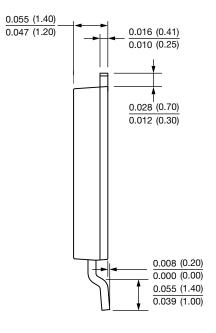

Mounting Pad Layout

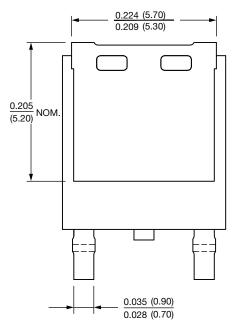

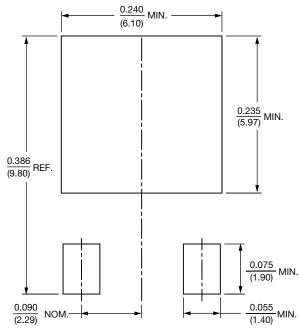



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.