

FRED Pt®, Ultrafast Soft Recovery Diode Module, 500 A



PRIMARY CHARACTERISTICS					
I _{F(AV)} 500 A					
V_{R}	600 V				
Q _{rr} (typical)	1770 nC				
t _{rr}	270 ns				
Туре	Modules - diode, FRED Pt®				
Package	TO-244				
Circuit configuration	Two diodes common cathode				

FEATURES

- Ultrafast recovery
- Designed for industrial level



 Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS

BENEFITS

- Reduced RFI and EMI
- Higher frequency operation
- · Reduced snubbing
- · Reduced parts count

DESCRIPTION / APPLICATIONS

FRED Pt® diodes are optimized to reduce losses and EMI/RFI in high frequency power conditioning systems. The softness of the recovery eliminates the need for a snubber in most applications. These devices are ideally suited for HF welding, power converters and other applications where switching losses are significant portion of the total losses.

ABSOLUTE MAXIMUM RATINGS					
PARAMETER	SYMBOL	TEST CONDITIONS	MAX.	UNITS	
Cathode to anode voltage	V _R		600	V	
Continuous forward current per diode	I _{F(DC)}	T _C = 25 °C	619	А	
		T _C = 85 °C	438		
		T _C = 134 °C	250		
Single pulse forward current per diode	I _{FSM}	T _C = 150 °C	4000		
Manipular and a state of the state of	P _D	T _C = 25 °C	937	w	
Maximum power dissipation		T _C = 134 °C	253		
Operating junction and storage temperatures	T _J , T _{Stg}		-40 to +175	°C	

ELECTRICAL SPECIFICATIONS PER LEG (T _J = 25 °C unless otherwise specified)							
PARAMETER	SYMBOL TEST CONDITIONS		MIN.	TYP.	MAX.	UNITS	
Breakdown voltage	V_{BR}	$I_R = 200 \mu A$	600	-	-		
Forward voltage	V _{FM}	I _F = 250 A	-	0.97	1.170		
		I _F = 500 A	-	1.08	-	V	
		I _F = 250 A, T _J = 175 °C	-	0.82	-	-	
		I _F = 500 A, T _J = 175 °C	-	0.97	-		
Reverse leakage current	I _{RM}	$T_J = 175 ^{\circ}\text{C}, V_R = V_R \text{rated}$	-	0.33	ı	mA	



DYNAMIC RECOVERY CHARACTERISTICS (T _J = 25 °C unless otherwise specified)							
PARAMETER	SYMBOL	TEST CONDITIONS			TYP.	MAX.	UNITS
Payaraa raaayaru tima	t _{rr}	T _J = 25 °C	$I_F = 50 \text{ A},$ $dI_F/dt = 50 \text{ A/}\mu\text{s},$ $V_R = 400 \text{ V}$	-	270	-	ns
Reverse recovery time		T _J = 150 °C		-	590	-	
Dook roomson, ourrent		T _J = 25 °C		-	9	-	
Peak recovery current		T _J = 150 °C		-	22	-	A
Povorco rocovony chargo	0	T _J = 25 °C		-	1770	-	nC
Reverse recovery charge Q _{rr}		T _J = 150 °C		-	7820	-	110

THERMAL - MECHANICAL SPECIFICATIONS							
PARAMETER		SYMBOL	MIN.	TYP.	MAX.	UNITS	
Thermal resistance,	per leg	Б	-	-	0.16		
junction to case	per module	R_{thJC}	-	-	0.08	°C/W	
Thermal resistance, case to heatsink		R _{thCS}	-	0.1	-		
Weight			-	68	-	g	
			-	2.4	-	OZ.	
Mounting torque Mounting torque center hole			30 (3.4)	-	40 (4.6)		
			12 (1.4)	=	18 (2.1)	lbf · in (N · m)	
Terminal torque			30 (3.4)	=	40 (4.6)		
Vertical pull			-	-	80	Und in	
2" lever pull	lever pull		-	-	35	lbf ⋅ in	
Case style			TO-244				

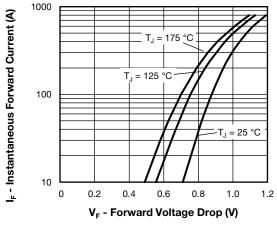


Fig. 1 - Typical Forward Voltage Drop vs. Instantaneous Forward Current (Per Diode)

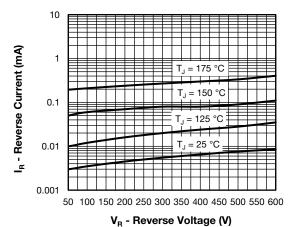


Fig. 2 - Typical Reverse Current vs. Reverse Voltage (Per Diode)

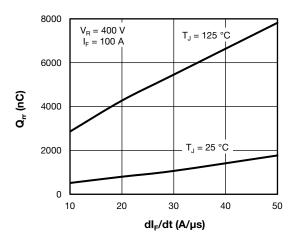


Fig. 3 - Typical Reverse Recovery Charge vs dl_F/dt (Per Diode)

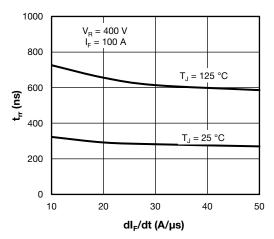


Fig. 4 - Typical Reverse Recovery Time vs dl_F/dt (Per Diode)

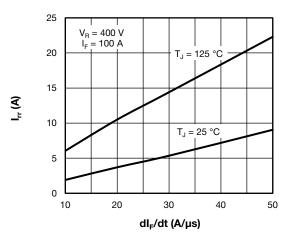


Fig. 5 - Typical Reverse Recovery Current vs. dl_F/dt (Per Diode)

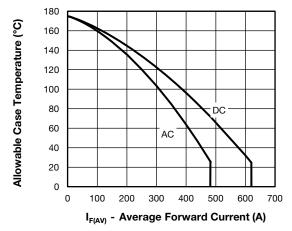


Fig. 6 - Maximum Allowable Case Temperature vs. Average Forward Current (Per Leg)

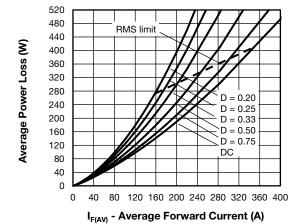


Fig. 7 - Average Power Loss vs. Average Forward Current (Forward Power Loss Characteristics)

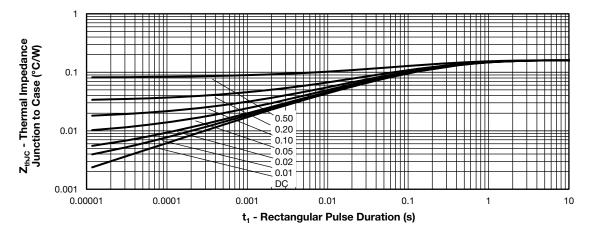


Fig. 8 - Z_{thJC} - Maximum Thermal Impedance Junction to Case vs. t1 Rectangular Pulse Duration


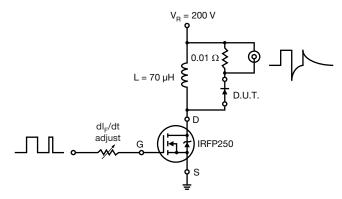


Fig. 9 - Reverse Recovery Parameter Test Circuit

ORDERING INFORMATION TABLE

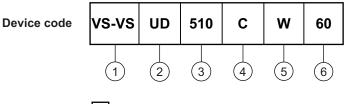

1 - Vishay Semiconductors product

UD = FRED Pt®

3 - Current rating (510 = 500 A)

4 - Circuit configuration:

C = two diodes common cathode


5 - W = TO-244 wire bondable not isolated


6 - Voltage rating (60 = 600 V)




CIRCUIT CONFIGURATION				
CIRCUIT	CIRCUIT CONFIGURATION CODE	CIRCUIT DRAWING		
Two diodes common cathode	C	Lug Lug terminal terminal anode 1 anode 2 Base common cathode		

DIMENSIONS in millimeters (inches)

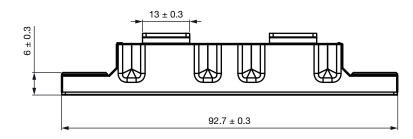



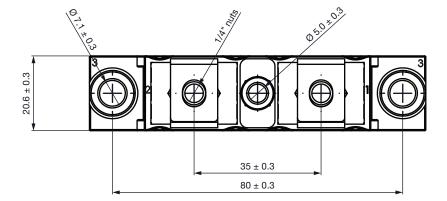



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.