

## Ultrafast Rectifier, 6 A FRED Pt®




#### **LINKS TO ADDITIONAL RESOURCES**



PRIMARY CHARACTERISTICS				
I <sub>F(AV)</sub>	6 A			
V <sub>R</sub>	200 V			
V <sub>F</sub> at I <sub>F</sub>	0.75 V			
t <sub>rr</sub> (typ.)	10 ns			
I <sub>FSM</sub>	120 A			
T <sub>J</sub> max.	175 °C			
Package	DFN6546A			
Circuit configuration	Single			

#### **FEATURES**

- Very low profile typical height of 0.88 mm
- · Ideal for automated placement





- Low forward voltage drop, low power losses
- · Low leakage current
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- AEC-Q101 qualified
- For PFC, CRM snubber operation
- Material categorization: for definitions of compliance please see <a href="https://www.vishav.com/doc?99912"><u>www.vishav.com/doc?99912</u></a>

#### **TYPICAL APPLICATIONS**

For use in high frequency inverters, DC/DC converters, freewheeling diodes, clamping and snubber, polarity protection, and LED lighting

### **MECHANICAL DATA**

Case: DFN6546A

Molding compound meets UL 94 V-0 flammability rating

Terminals: matte tin plated leads, solderable per

J-STD-002, meets JESD 201 class 2 whisker test

Polarity: color band denotes cathode end

ABSOLUTE MAXIMUM RATINGS					
PARAMETER	SYMBOL	TEST CONDITIONS	VALUES	UNITS	
Peak repetitive reverse voltage	$V_{RRM}$		200	V	
Average rectified forward current	I <sub>F(AV)</sub>	T <sub>M</sub> = 158 °C, D = 0.50	6	^	
Non-repetitive peak surge current	I <sub>FSM</sub>	T <sub>J</sub> = 25 °C, 10 ms sine pulse	120	A	
Operating junction and storage temperatures	T <sub>J</sub> , T <sub>Stg</sub>		-55 to +175	°C	

<b>ELECTRICAL SPECIFICATIONS</b> (T <sub>J</sub> = 25 °C unless otherwise specified)						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Breakdown voltage, blocking voltage	$V_{BR}$ , $V_{R}$	I <sub>R</sub> = 100 μA	200	-	-	
Forward voltage	V	I <sub>F</sub> = 6 A	-	0.95	1.1	V
	V <sub>F</sub>	I <sub>F</sub> = 6 A, T <sub>J</sub> = 150 °C	-	0.75	0.85	
Payaraa laakaga aurrant		V <sub>R</sub> = V <sub>R</sub> rated	-	-	1	
Reverse leakage current	I <sub>R</sub>	$T_J = 150  ^{\circ}\text{C},  V_R = V_R  \text{rated}$	-	=-	100	μA
Junction capacitance	C <sub>T</sub>	V <sub>R</sub> = 200 V	-	21	-	pF



<b>DYNAMIC RECOVERY CHARACTERISTICS</b> (T <sub>J</sub> = 25 °C unless otherwise specified)							
PARAMETER	SYMBOL	TEST CO	TEST CONDITIONS		TYP.	MAX.	UNITS
		$I_F = 0.5 A, I_R = 1 A$	A, $I_{rr} = 0.25 \text{ A}$	ı	10	23	
Reverse recovery time	t <sub>rr</sub>	T <sub>J</sub> = 25 °C	I <sub>F</sub> = 6 A, dI <sub>F</sub> /dt = 500 A/μs, V <sub>R</sub> = 200 V	ı	11	-	ns
		T <sub>J</sub> = 125 °C		-	19	-	
Peak recovery current I <sub>RRN</sub>		T <sub>J</sub> = 25 °C		-	3.5	-	Α
	IRRM	T <sub>J</sub> = 125 °C		-	6.5	-	] ^
Develope vecessors above	Q <sub>rr</sub>	T <sub>J</sub> = 25 °C		-	23	-	nC
Reverse recovery charge		Q <sub>rr</sub>	T <sub>J</sub> = 125 °C		-	64	-

THERMAL - MECHANICAL SPECIFICATIONS						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Maximum junction and storage temperature range	T <sub>J</sub> , T <sub>Stg</sub>		-55	-	175	°C
Thermal resistance, junction to mount	R <sub>thJM</sub> <sup>(1)</sup>		-	-	3.0	°C/W
Weight			-	0.086	-	9
Marking device		Case style DFN6546A		61	<del>1</del> 2	

#### Note

<sup>(1)</sup> Thermal resistance junction to mount follows JEDEC® 51-14 transient dual interface test method (TDIM)




Fig. 1 - Typical Forward Voltage Drop Characteristics




Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage




Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage

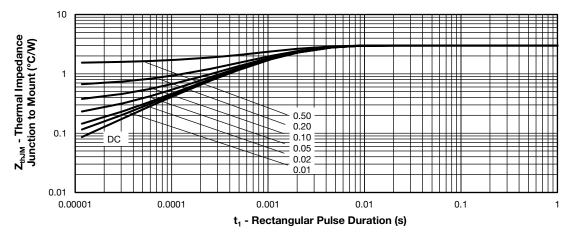


Fig. 4 - Maximum Transient Thermal Impedance, Junction to Mount




Fig. 5 - Maximum Allowable Mount Temperature vs. Average Forward Current





Fig. 6 - Forward Power Loss Characteristics

Formula used:  $T_M = T_J - (Pd + Pd_{REV}) \times R_{thJM}$ ;  $Pd = forward power loss = I_{F(AV)} \times V_{FM} at (I_{F(AV)}/D) (see fig. 5);$  $Pd_{REV}$  = inverse power loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R$  at  $V_{R1}$  = rated  $V_R$ 

#### www.vishay.com

### Vishay Semiconductors



70 = 125 °C 60 50 40 Q<sub>rr</sub> (nC) 30  $T_J = 25$  °C 20 10 0 0 100 200 300 400 500 600 dl<sub>F</sub>/dt (A/µs)

Fig. 7 - Typical Reverse Recovery Time vs. dl<sub>F</sub>/dt

Fig. 8 - Typical Stored Charge vs. dl<sub>F</sub>/dt





Fig. 9 - I<sub>rr</sub> vs. dI/dt

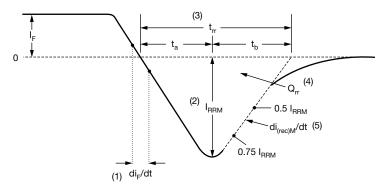

- (1) di<sub>F</sub>/dt rate of change of current through zero crossing
- (2)  $I_{RRM}$  peak reverse recovery current
- (3)  $\rm t_{rr}$  reverse recovery time measured from zero crossing point of negative going  $\rm I_F$  to point where a line passing through 0.75  $\rm I_{RRM}$  and 0.50  $\rm I_{RRM}$  extrapolated to zero current.
- (4)  $\mathbf{Q}_{rr}$  area under curve defined by  $\mathbf{t}_{rr}$  and  $\mathbf{I}_{RRM}$

$$Q_{rr} = \frac{t_{rr} \times I_{RRM}}{2}$$


(5) di<sub>(rec)M</sub>/dt - peak rate of change of current during t<sub>b</sub> portion of t<sub>rr</sub>

Fig. 10 - Reverse Recovery Waveform and Definitions



#### **ORDERING INFORMATION TABLE**

Device code



1 - Vishay Semiconductors product

Current rating (6 = 6 A)

3 - Circuit configuration:

E = single diode

4 - R = DFN6546A package

5 - Process type,

H = ultrafast recovery

6 - Voltage code (02 = 200 V)

7 - H = AEC-Q101 qualified

8 - M3 = halogen-free, RoHS-compliant, and terminations lead (Pb)-free


ORDERING INFORMATION (Example)						
PREFERRED P/N	D P/N PREFERRED PACKAGE CODE BASE QUANTITY PACKAGING DESCRIPTION					
VS-6ERH02HM3/I	I	6000	13" diameter plastic tape and reel			


LINKS TO RELATED DOCUMENTS			
Dimensions	www.vishay.com/doc?97347		
Part marking information	www.vishay.com/doc?97348		
Packaging information	www.vishay.com/doc?98691		





# DFN6456, FRED Pt®

### **DIMENSIONS** in inches (millimeters)



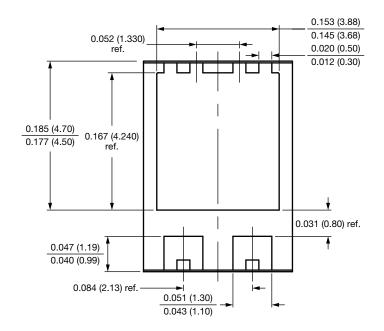







### **Legal Disclaimer Notice**

Vishay

### **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.