


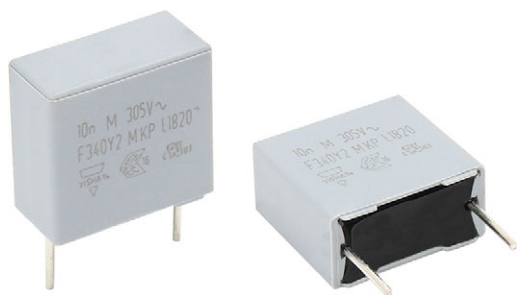

THB Grade IIIB Class Y2 Interference Suppression Film Capacitor Radial MKP 305 V_{AC} - Line Bypass

**FEATURES**


- IEC 60384-14: 2013 / AMD1: 2016 grade IIIB certified: 85 °C, 85 % RH, 1000 h at U_{RAC}
- AEC-Q200 qualified (rev. D) up to 105 °C
- High temperature capabilities, up to 125 °C
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

AUTOMOTIVE
GRADE**RoHS**
COMPLIANT**LINKS TO ADDITIONAL RESOURCES****APPLICATIONS**

For standard line bypass (between line and ground) Y2 applications.


See also application note: www.vishay.com/doc?28153

QUICK REFERENCE DATA


Rated capacitance range	0.01 µF to 1 µF (preferred values according to E6)
Capacitance tolerance	± 20 %; ± 10 %; ± 5 % (37.5 mm ± 5 % pitch values on request)
Climatic testing class according to IEC 60068-1	55 / 105 / 56B
Rated DC voltage	1500 V _{DC} at 85 °C 1250 V _{DC} at 105 °C 1000 V _{DC} at 125 °C
Permissible AC voltage	305 V _{AC} ; 50 Hz to 60 Hz
Rated temperature	105 °C
Maximum permissible temperature	125 °C for limited time
Reference standards	IEC 60384-14:2013 IEC 60384-14:2013 / AMD1:2016 EN 60384-14 IEC 60065 requires pass. flamm. class B for volume ≥ 1750 mm ³ Class C for volume < 1750 mm ³ UL 60384-14 (2 nd edition) CSA-E60384-1:14 (3 rd edition) CQC
Dielectric	Polypropylene film
Electrodes	Metallized
Construction	Series construction 
Encapsulation	Plastic case, epoxy resin sealed, flame retardant UL-class 94 V-0
Leads	Tinned wire
Marking	C-value; tolerance; rated voltage; sub-class; manufacturer's type; code for dielectric material; manufacturer location, manufacturer's logo, year and week; safety approvals

Note

- For more detailed data and test requirements, contact rfi@vishay.com

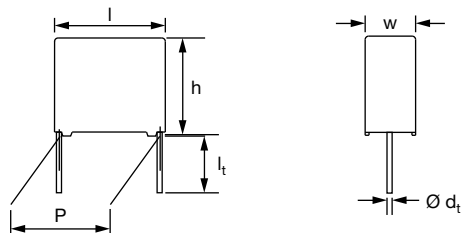DIMENSIONS in millimeters

Notes

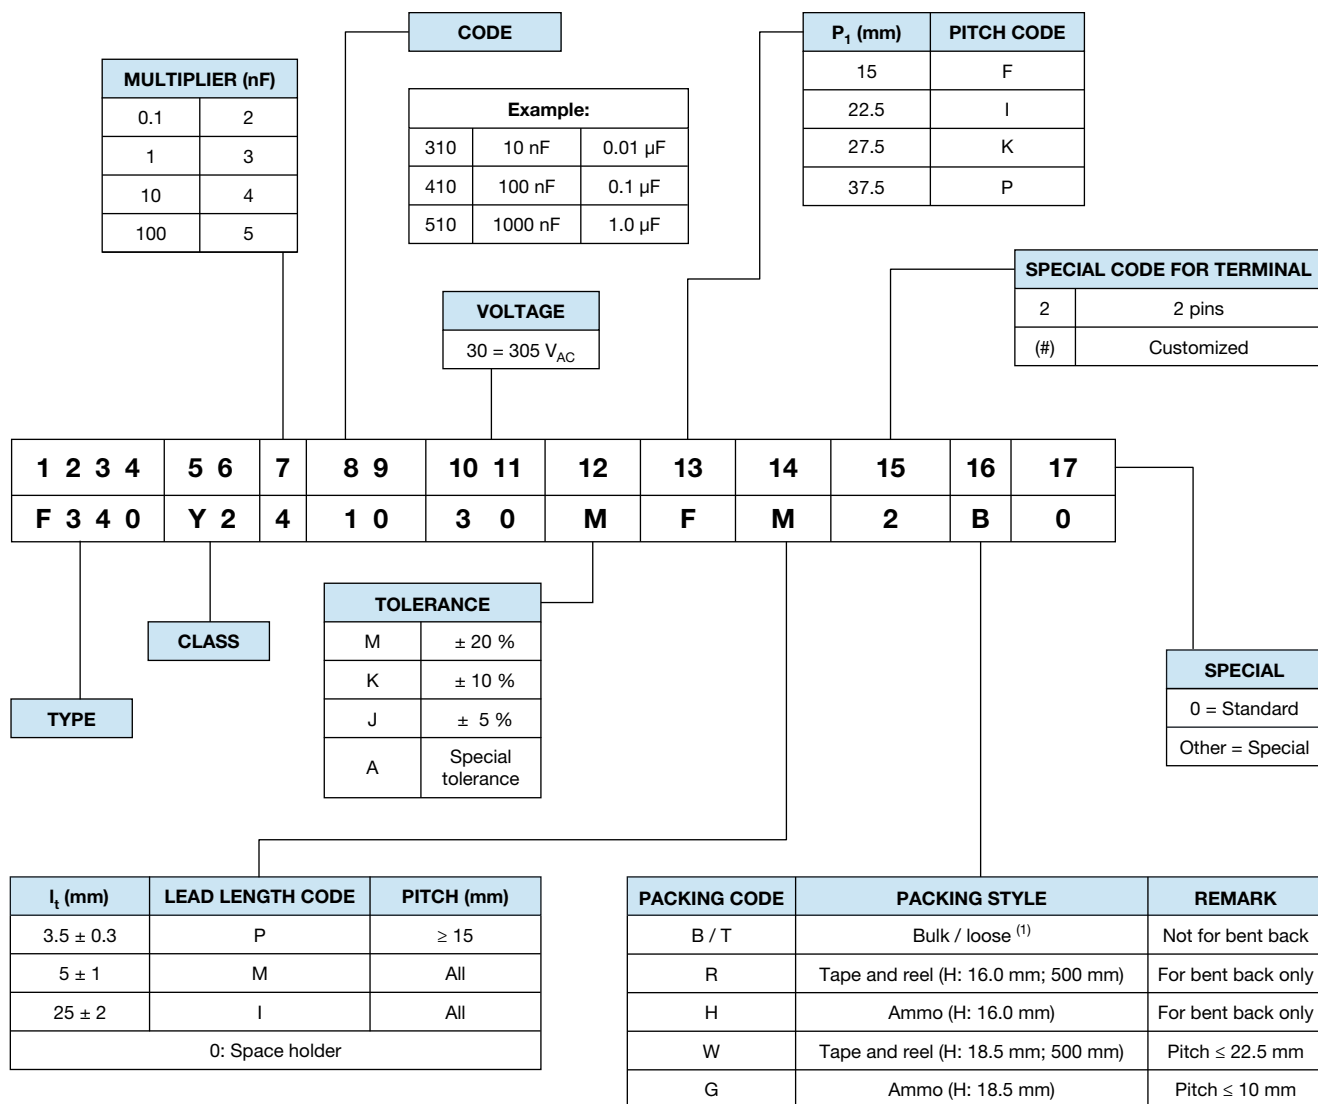- Standard dimension
- $\varnothing d_t \pm 10\%$ of standard diameter specified

COMPOSITION OF CATALOG NUMBER




SPECIFIC REFERENCE DATA		
DESCRIPTION	VALUE	
Rated AC voltage (U_{RAC})	305 V	
Permissible DC voltage (U_{RDC})	1000 V _{DC} at 105 °C 1500 V _{DC} at 85 °C	
Tangent of loss angle	At 1 kHz	At 10 kHz
	$\leq 10 \times 10^{-4}$	$\leq 20 \times 10^{-4}$
Rated voltage pulse slope (dU/dt) _R at 420 V _{DC}		
Pitch = 10 mm	800 V/ μ s	
Pitch = 15 mm	600 V/ μ s	
Pitch = 22.5 mm	500 V/ μ s	
Pitch = 27.5 mm	400 V/ μ s	
R between leads, for $C \leq 0.33 \mu$ F at 100 V; 1 min	$> 15\,000\,M\Omega$	
RC between leads, for $C > 0.33 \mu$ F at 100 V; 1 min	$> 5000\,s$	
R between leads and case; 100 V; 1 min	$> 30\,000\,M\Omega$	
Withstanding (DC) voltage (cut off current 10 mA) ⁽¹⁾ ; rise time $\leq 1000\,V/s$	3400 V; 1 min	
Withstanding (AC) voltage between leads and case	2100 V; 1 min	
Rated temperature	105 °C	
Maximum permissible temperature	125 °C up to 1000 h	

Note

⁽¹⁾ See "Voltage Proof Test for Metalized Film Capacitors": www.vishay.com/doc?28169

ELECTRICAL DATA AND ORDERING INFORMATION										
U _{RAC} (V)	CAP. (μF)	DIMENSIONS ⁽⁴⁾ w x h x l (mm)	MASS (g) ⁽³⁾	CATALOG NUMBER F340Y2... AND PACKAGING						
				LOOSE IN BOX					TAPED REEL (500 mm) ⁽¹⁾⁽²⁾	
				SHORT LEADS			LONG LEADS			
				l _t = 3.5 mm ± 0.3 mm	l _t = 5.0 mm ± 1.0 mm	SPQ	l _t = 25.0 mm ± 2.0 mm	SPQ	H = 18.5 mm; P ₀ = 12.7 mm	SPQ
305	PITCH = 15.0 mm ± 0.4 mm; d _t = 0.60 mm ± 0.06 mm; C-TOL. = ± 20 %									
	0.01	5.0 x 11.0 x 17.5	1.0	31030MFP2B0	31030MFM2B0	1250	31030MFI2B0	1000	31030MF02W0	1100
	0.012			31230MFP2B0	31230MFM2B0		31230MFI2B0		31230MF02W0	
	0.015			31530MFP2B0	31530MFM2B0		31530MFI2B0		31530MF02W0	
	0.018			31830MFP2B0	31830MFM2B0		31830MFI2B0		31830MF02W0	
	0.022	6.0 x 12.0 x 17.5	1.4	32230MFP2B0	32230MFM2B0	1000	32230MFI2B0	1000	32230MF02W0	900
	PITCH = 15.0 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm; C-TOL. = ± 20 %									
	0.027	7.0 x 13.5 x 17.5	1.8	32730MFP2B0	32730MFM2B0	750	32730MFI2B0	500	32730MF02W0	800
	0.033			33330MFP2B0	33330MFM2B0		33330MFI2B0		33330MF02W0	
	0.039			33930MFP2B0	33930MFM2B0		33930MFI2B0		33930MF02W0	
	0.047	8.5 x 15.0 x 17.5	2.4	34730MFP2B0	34730MFM2B0	750	34730MFI2B0	500	34730MF02W0	650
	0.056			35630MFP2B0	35630MFM2B0		35630MFI2B0		35630MF02W0	
	0.068	10.0 x 16.5 x 17.5	3.0	36830MFP2B0	36830MFM2B0	500	36830MFI2B0	450	36830MF02W0	600
	0.082	10.5 x 17.5 x 18.0	4.5	38230MFP2B0	38230MFM2B0	250	38230MFI2B0	400	-	

Notes

- SPQ = Standard Packing Quantity
- ⁽¹⁾ Reel diameter = 356 mm is available on request
- ⁽²⁾ H = in-tape height; P₀ = sprocket hole distance; for detailed specifications refer to "Packaging Information"
- ⁽³⁾ Weight for short lead product only
- ⁽⁴⁾ For tolerances see chapter "Space Requirements for Printed-Circuit Board Applications and Dimension Tolerances"



ELECTRICAL DATA AND ORDERING INFORMATION

U _{RAC} (V)	CAP. (μF)	DIMENSIONS ⁽⁴⁾ w x h x l (mm)	MASS (g) ⁽³⁾	CATALOG NUMBER F340Y2... AND PACKAGING														
				LOOSE IN BOX					TAPED REEL (500 mm) ⁽¹⁾⁽²⁾									
				SHORT LEADS			LONG LEADS											
				l _t = 3.5 mm ± 0.3 mm	l _t = 5.0 mm ± 1.0 mm	SPQ	l _t = 25.0 mm ± 2.0 mm	SPQ	H = 18.5 mm; P ₀ = 12.7 mm	SPQ								
305	PITCH = 22.5 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm; C-TOL. = ± 20 %																	
	0.033	6.0 x 15.5 x 26.0	2.4	33330MIP2T0	33330MIM2T0	300	33330MII2B0	250	-									
	0.039			33930MIP2T0	33930MIM2T0		33930MII2B0											
	0.047			34730MIP2T0	34730MIM2T0		34730MII2B0											
	0.056	7.0 x 16.5 x 26.0	2.9	35630MIP2T0	35630MIM2T0	200	35630MII2B0	250										
	0.068			36830MIP2T0	36830MIM2T0		36830MII2B0											
	0.082			38230MIP2T0	38230MIM2T0		38230MII2B0											
	0.10	8.5 x 18.0 x 26.0	3.8	41030MIP2T0	41030MIM2T0	200	41030MII2B0	250										
	0.12			41230MIP2T0	41230MIM2T0		41230MII2B0											
	0.15			41530MIP2T0	41530MIM2T0		41530MII2B0											
	0.18	10.0 x 19.5 x 26.0	6.8	41830MIP2T0	41830MIM2T0	200	41830MII2B0	200										
	0.22			42230MIP2T0	42230MIM2T0		42230MII2B0											
	0.27			42730MIP2T0	42730MIM2T0		42730MII2B0											
	0.33	12.0 x 22.0 x 26.0	7.8	43330MIP2T0	43330MIM2T0	150	43330MII2B0	200										
	0.39			43930MIP2T0	43930MIM2T0		43930MII2B0											
	0.47			44730MIP2T0	44730MIM2T0		44730MII2B0											
	0.56	15.5 x 26.5 x 26.5	14	45630MIP2T0	45630MIM2T0	110	45630MII2B0	275										
	0.68			46830MIP2T0	46830MIM2T0		46830MII2B0											
	0.82			48230MIP2T0	48230MIM2T0		48230MII2B0											
	PITCH = 27.5 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm; C-TOL. = ± 20 %																	
	0.10	9.0 x 19.0 x 31.0	5.5	41030MKP2T0	41030MKM2T0	100	41030MKI2B0	150				-						
	0.12			41230MKP2T0	41230MKM2T0		41230MKI2B0											
	0.15			41530MKP2T0	41530MKM2T0		41530MKI2B0											
	0.18	11.0 x 21.0 x 31.0	7.4	41830MKP2T0	41830MKM2T0	100	41830MKI2B0	125										
	0.22			42230MKP2T0	42230MKM2T0		42230MKI2B0											
	0.27			42730MKP2T0	42730MKM2T0		42730MKI2B0											
	0.33	13.0 x 23.0 x 31.0	9.2	43330MKP2T0	43330MKM2T0	100	43330MKI2B0	125										
	0.39			43930MKP2T0	43930MKM2T0		43930MKI2B0											
	0.47			44730MKP2T0	44730MKM2T0		44730MKI2B0											
	0.56	15.0 x 25.0 x 31.0	12.3	45630MKP2T0	45630MKM2T0	100	45630MKI2B0	125										
	0.68			46830MKP2T0	46830MKM2T0		46830MKI2B0											
	0.82			48230MKP2T0	48230MKM2T0		48230MKI2B0											
	0.10	18.0 x 28.0 x 31.0	16.1	43930MKP2T0	43930MKM2T0	100	43930MKI2B0	100										
	0.12			44730MKP2T0	44730MKM2T0		44730MKI2B0											
	0.15			45630MKP2T0	45630MKM2T0		45630MKI2B0											
	0.18	21.0 x 31.0 x 31.0	20.3	46830MKP2T0	46830MKM2T0	50	46830MKI2B0	75										
	0.22			4730MKP2T0	4730MKM2T0		4730MKI2B0											
	0.27			47730MKP2T0	47730MKM2T0		47730MKI2B0											
	0.33	20.0 x 35.0 x 31.0	17.5	48230MKP2T0	48230MKM2T0	50	48230MKI2B0	75										
	0.39			48730MKP2T0	48730MKM2T0		48730MKI2B0											
	0.47			49330MKP2T0	49330MKM2T0		49330MKI2B0											
	PITCH = 37.5 mm ± 0.5 mm; d _t = 1.0 mm ± 0.1 mm; C-TOL. = ± 20 %																	
	0.47	14.5 x 24.5 x 41.5	15.5	44730MPP2T0	44730MPM2T0	80	44730MPI2T0	80							-			
	0.68	16.0 x 28.5 x 41.5	19.5	46830MPP2T0	46830MPM2T0	70	46830MPI2T0	70										
	1.0	18.0 x 32.5 x 41.5	25	51030MPP2T0	51030MPM2T0	60	51030MPI2T0	60										
	PITCH = 15.0 mm ± 0.4 mm; d _t = 0.60 mm ± 0.06 mm; C-TOL. = ± 10 %																	
	0.010	5.0 x 11.0 x 17.5	1.0	31030KFP2B0	31030KFM2B0	1250	31030KFI2B0	1000							31030KF02W0	1100		
	0.012			31230KFP2B0	31230KFM2B0		31230KFI2B0								31230KF02W0			
	0.015			31530KFP2B0	31530KFM2B0		31530KFI2B0								31530KF02W0			
	0.018			31830KFP2B0	31830KFM2B0		31830KFI2B0								31830KF02W0			
	0.022	6.0 x 12.0 x 17.5	1.4	32230KFP2B0	32230KFM2B0	1000	32230KFI2B0	1000							32230KF02W0	900		
	PITCH = 15.0 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm; C-TOL. = ± 10 %																	
	0.027	7.0 x 13.5 x 17.5	1.8	32730KFP2B0	32730KFM2B0	750	32730KFI2B0	500							32730KF02W0	800		
	0.033			33330KFP2B0	33330KFM2B0		33330KFI2B0								33330KF02W0			
	0.039			33930KFP2B0	33930KFM2B0		33930KFI2B0								33930KF02W0			
	0.047	8.5 x 15.0 x 17.5	2.4	34730KFP2B0	34730KFM2B0	750	34730KFI2B0	500							34730KF02W0	650		
	0.056			35630KFP2B0	35630KFM2B0		35630KFI2B0								35630KF02W0			
	0.068			36830KFP2B0	36830KFM2B0		36830KFI2B0								36830KF02W0			
	0.082	10.0 x 16.5 x 17.5	3.0	38230KFP2B0	38230KFM2B0	500	38230KFI2B0	450							-	-		
	0.10	11.0 x 18.5 x 18.0	4.5	38230KFP2B0	38230KFM2B0	250	38230KFI2B0	400							-	-		
	0.12			38730KFP2B0	38730KFM2B0		38730KFI2B0								38730KF02W0			
	0.15			39330KFP2B0	39330KFM2B0		39330KFI2B0								39330KF02W0			
	0.18	12.0 x 20.0 x 18.0	5.4	39330KFP2B0	39330KFM2B0	250	39330KFI2B0	400							-	-		
	0.22			39830KFP2B0	39830KFM2B0		39830KFI2B0								39830KF02W0			
	0.27			40330KFP2B0	40330KFM2B0		40330KFI2B0								40330KF02W0			
	0.33	13.0 x 21.0 x 18.0	6.3	40330KFP2B0	40330KFM2B0	250	40330KFI2B0	400							-	-		
	0.39			40830KFP2B0	40830KFM2B0		40830KFI2B0								40830KF02W0			
	0.47			41330KFP2B0	41330KFM2B0		41330KFI2B0								41330KF02W0			
	0.56	14.0 x 22.0 x 18.0	7.2	41330KFP2B0	41330KFM2B0	250	41330KFI2B0	400							-	-		
	0.68			41830KFP2B0	41830KFM2B0		41830KFI2B0								41830KF02W0			
	0.82			42330KFP2B0	42330KFM2B0		42330KFI2B0								42330KF02W0			
	0.10	15.0 x 23.0 x 18.0	8.1	42330KFP2B0	42330KFM2B0	250	42330KFI2B0	400							-	-		
	0.12			42830KFP2B0	42830KFM2B0		42830KFI2B0								42830KF02W0			
	0.15			43330KFP2B0	43330KFM2B0		43330KFI2B0								43330KF02W0			
	0.18	16.0 x 24.0 x 18.0	9.0	43330KFP2B0	43330KFM2B0	250	43330KFI2B0	400							-	-		
	0.22			43830KFP2B0	43830KFM2B0		43830KFI2B0								43830KF02W0			
	0.27			44330KFP2B0	44330KFM2B0		44330KFI2B0								44330KF02W0			
	0.33	17.0 x 25.0 x 18.0	9.9	44330KFP2B0	44330KFM2B0	250	44330KFI2B0	400							-	-		
	0.39			44830KFP2B0	44830KFM2B0		44830KFI2B0								44830KF02W0			
	0.47			45330KFP2B0	45330KFM2B0		45330KFI2B0								45330KF02W0			
	0.56	18.0 x 26.0 x 18.0	10.8	45330KFP2B0	45330KFM2B0	250	45330KFI2B0	400							-	-		
0.68	45830KFP2B0			45830KFM2B0	45830KFI2B0		45830KF02W0											
0.82	46330KFP2B0			46330KFM2B0	46330KFI2B0		46330KF02W0											
0.10	19.0 x 27.0 x 18.0	11.7	46330KFP2B0	46330KFM2B0	250	46330KFI2B0	400	-	-									
0.12			46830KFP2B0	46830KFM2B0		46830KFI2B0		46830KF02W0										
0.15			47330KFP2B0	47330KFM2B0		47330KFI2B0		47330KF02W0										
0.18	20.0 x 28.0 x 18.0	12.6	47330KFP2B0	47330KFM2B0	250	47330KFI2B0	400	-	-									
0.22			47830KFP2B0	47830KFM2B0		47830KFI2B0		47830KF02W0										
0.27			48330KFP2B0	48330KFM2B0		48330KFI2B0		48330KF02W0										
0.33	21.0 x 29.0 x 18.0	13.5	48330KFP2B0	48330KFM2B0	250	48330KFI2B0	400	-	-									
0.39			48830KFP2B0	48830KFM2B0		48830KFI2B0		48830KF02W0										
0.47			49330KFP2B0	49330KFM2B0		49330KFI2B0		49330KF02W0										
0.56	22.0 x 30.0 x 18.0	14.4	49330KFP2B0	49330KFM2B0	250	49330KFI2B0	400	-	-									
0.68			49830KFP2B0	49830KFM2B0		49830KFI2B0		49830KF02W0										
0.82			50330KFP2B0	50330KFM2B0		50330KFI2B0		50330KF02W0										
0.10	23.0 x 31.0 x 18.0	15.3	50330KFP2B0	50330KFM2B0	250	50330KFI2B0	400	-	-									
0.12			50830KFP2B0	50830KFM2B0		50830KFI2B0		50830KF02W0										
0.15			51330KFP2B0	51330KFM2B0		51330KFI2B0		51330KF02W0										
0.18	24.0 x 32.0 x 18.0	16.2	51330KFP2B0	51330KFM2B0	250	51330KFI2B0	400	-	-									
0.22			51830KFP2B0	51830KFM2B0		51830KFI2B0		51830KF02W0										
0.27			52330KFP2B0	52330KFM2B0		52330KFI2B0		52330KF02W0										
0.33	25.0 x 33.0 x 18.0	17.1	52330KFP2B0	52330KFM2B0	250	52330KFI2B0	400	-	-									
0.39			52830KFP2B0	52830KFM2B0		52830KFI2B0		52830KF02W0										
0.47			53330KFP2B0	53330KFM2B0		53330KFI2B0		53330KF02W0										
0.56	26.0 x 34.0 x 18.0	18.0	53330KFP2B0	53330KFM2B0	250	53330KFI2B0	400	-	-									
0.68			53830KFP2B0	53830KFM2B0		53830KFI2B0		53830KF02W0										
0.82			54330KFP2B0	54330KFM2B0		54330KFI2B0		54330KF02W0										
0.10	27.0 x 35.0 x 18.0	18.9	54330KFP2B0	54330KFM2B0	250	54330KFI2B0	400	-	-									
0.12			54830KFP2B0	54830KFM2B0		54830KFI2B0		54830KF02W0										
0.15			55330KFP2B0	55330KFM2B0		55330KFI2B0		55330KF02W0										
0.18	28.0 x 36.0 x 18.0	19.8	55330KFP2B0	55330KFM2B0	250	55330KFI2B0	400	-	-									
0.22			55830KFP2B0	55830KFM2B0		55830KFI2B0		55830KF02W0										
0.27			56330KFP2B0	56330KFM2B0		56330KFI2B0		56330KF02W0										
0.33	29.0 x 37.0 x 18.0	20.7	56330KFP2B0	56330KFM2B0	250	56330KFI2B0	400	-	-									
0.39			56830KFP2B0	56830KFM2B0		56830KFI2B0		56830KF02W0										
0.47			57330KFP2B0	57330KFM2B0		57330KFI2B0		57330KF02W0										
0.56	30.0 x 38.0 x 18.0	21.6	57330KFP2B0	57330KFM2B0	250	57330KFI2B0	400	-	-									
0.68			57830KFP2B0	57830KFM2B0		57830KFI2B0		57830KF02W0										
0.82			58330KFP2B0	58330KFM2B0		58330KFI2B0		58330KF02W0										
0.10	31.0 x 39.0 x 18.0	22.5	58330KFP2B0	58330KFM2B0	250	58330KFI2B0	400	-	-									
0.12			58830KFP2B0	58830KFM2B0		58830KFI2B0		58830KF02W0										
0.15			59330KFP2B0	59330KFM2B0		59330KFI2B0		59330KF02W0										
0.18	32.0 x 40.0 x 18.0	23.4	59330KFP2B0	59330KFM2B0	250	59330KFI2B0	400	-	-									
0.22			59830KFP2B0	59830KFM2B0		59830KFI2B0		59830KF02W0										
0.27			60330KFP2B0	60330KFM2B0		60330KFI2B0		60330KF02W0										
0.33	33.0 x 41.0 x 18.0	24.3	60330KFP2B0	60330KFM2B0	250	60330KFI2B0	400	-	-									
0.39			60830KFP2B0	60830KFM2B0		60830KFI2B0		60830KF02W0										
0.47			61330KFP2B0	61330KFM2B0		61330KFI2B0		61330KF02W0										
0.56	34.0 x 42.0 x 18.0	25.2	61330KFP2B0	61330KFM2B0	250	61330KFI2B0	400	-	-									
0.68			61830KFP2B0	61830KFM2B0		61830KFI2B0		61830KF02W0										
0.82			62330KFP2B0	62330KFM2B0		62330KFI2B0		62330KF02W0										
0.10	35.0 x 43.0 x 18.0	26.1	62330KFP2B0	62330KFM2B0	250	62330KFI2B0	400	-	-									
0.12			62830KFP2B0	62830KFM2B0		62830KFI2B0		62830KF02W0										
0.15			63330KFP2B0	63330KFM2B0		63330KFI2B0		63330KF02W0										
0.18	36.0 x 44.0 x 18.0	27.0	63330KFP2B0	63330KFM2B0	250	63330KFI2B0	400	-	-									
0.22			63830KFP2B0	63830KFM2B0		63830KFI2B0		63830KF02W0										
0.27			64330KFP2B0	64330KFM2B0		64330KFI2B0		64330KF02W0										
0.33	37.0 x 45.0 x 18.0	27.9	64330KFP2B0	64330KFM2B0														



ELECTRICAL DATA AND ORDERING INFORMATION

U _{RAC} (V)	CAP. (μF)	DIMENSIONS ⁽⁴⁾ w x h x l (mm)	MASS (g) ⁽³⁾	CATALOG NUMBER F340Y2... AND PACKAGING										
				LOOSE IN BOX					TAPED REEL (500 mm) ⁽¹⁾⁽²⁾					
				SHORT LEADS			LONG LEADS							
				l _t = 3.5 mm ± 0.3 mm	l _t = 5.0 mm ± 1.0 mm	SPQ	l _t = 25.0 mm ± 2.0 mm	SPQ	H = 18.5 mm; P ₀ = 12.7 mm	SPQ				
305	PITCH = 22.5 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm; C-TOL. = ± 10 %													
	0.033	6.0 x 15.5 x 26.0	2.4	33330KIP2T0	33330KIM2T0	300	33330KII2B0	250	-	-				
	0.039			33930KIP2T0	33930KIM2T0		33930KII2B0							
	0.047			34730KIP2T0	34730KIM2T0		34730KII2B0							
	0.056	7.0 x 16.5 x 26.0	2.9	35630KIP2T0	35630KIM2T0	200	35630KII2B0	250						
	0.068			36830KIP2T0	36830KIM2T0		36830KII2B0							
	0.082			38230KIP2T0	38230KIM2T0		38230KII2B0							
	0.10	8.5 x 18.0 x 26.0	3.8	41030KIP2T0	41030KIM2T0	200	41030KII2B0	250						
	0.12			41230KIP2T0	41230KIM2T0		41230KII2B0							
	0.15			41530KIP2T0	41530KIM2T0		41530KII2B0							
	0.18	12.0 x 22.0 x 26.0	7.8	41830KIP2T0	41830KIM2T0	150	41830KII2B0	200						
	0.22			42230KIP2T0	42230KIM2T0		42230KII2B0							
	0.27			42730KIP2T0	42730KIM2T0		42730KII2B0							
	0.33	15.5 x 26.5 x 26.5	14.0	43330KIP2T0	43330KIM2T0	110	43330KII2B0	275						
	PITCH = 27.5 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm; C-TOL. = ± 10 %													
	0.10	9.0 x 19.0 x 31.0	5.5	41030KKP2T0	41030KKM2T0	100	41030KKI2B0	150			-	-		
	0.12			41230KKP2T0	41230KKM2T0		41230KKI2B0							
	0.15			41530KKP2T0	41530KKM2T0		41530KKI2B0							
	0.18	11.0 x 21.0 x 31.0	7.4	41830KKP2T0	41830KKM2T0	100	41830KKI2B0	125						
	0.22			42230KKP2T0	42230KKM2T0		42230KKI2B0							
	0.27			42730KKP2T0	42730KKM2T0		42730KKI2B0							
	0.33	18.0 x 28.0 x 31.0	16.1	43330KKP2T0	43330KKM2T0	100	43330KKI2B0	100						
	0.39			43930KKP2T0	43930KKM2T0		43930KKI2B0							
	0.47			44730KKP2T0	44730KKM2T0		44730KKI2B0							
	0.56	21.0 x 31.0 x 31.0	20.3	45630KKP2T0	45630KKM2T0	50	45630KKI2B0	75						
	0.68			46830KKP2T0	46830KKM2T0		46830KKI2B0							
	PITCH = 37.5 mm ± 0.5 mm; d _t = 1.0 mm ± 0.1 mm; C-TOL. = ± 10 %													
	0.47	14.5 x 24.5 x 41.5	14.8	44730KPP2T0	44730KPM2T0	80	44730KPI2T0	80	-	-				
	0.56			45630KPP2T0	45630KPM2T0		45630KPI2T0							
	0.68			46830KPP2T0	46830KPM2T0		46830KPI2T0							
	0.82	18.0 x 32.5 x 41.5	26	48230KPP2T0	48230KPM2T0	60	48230KPI2T0	60						
	1.0			51030KPP2T0	51030KPM2T0		51030KPI2T0							
	PITCH = 15.0 mm ± 0.4 mm; d _t = 0.60 mm ± 0.06 mm; C-TOL. = ± 5 %													
	0.010	5.0 x 11.0 x 17.5	1.0	31030JFP2B0	31030JFM2B0	1250	31030JFI2B0	1000	31030JF02W0	1100				
	0.012			31230JFP2B0	31230JFM2B0		31230JFI2B0							
	0.015			31530JFP2B0	31530JFM2B0		31530JFI2B0							
	0.018	6.0 x 12.0 x 17.5	1.4	31830JFP2B0	31830JFM2B0	1000	31830JFI2B0	1000	31830JF02W0	900				
	0.022			32230JFP2B0	32230JFM2B0		32230JFI2B0							
	PITCH = 15.0 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm; C-TOL. = ± 5 %													
	0.027	7.0 x 13.5 x 17.5	1.8	32730JFP2B0	32730JFM2B0	750	32730JFI2B0	500	32730JF02W0	800				
	0.033			33330JFP2B0	33330JFM2B0		33330JFI2B0							
	0.039			33930JFP2B0	33930JFM2B0		33930JFI2B0							
	0.047	8.5 x 15.0 x 17.5	2.4	34730JFP2B0	34730JFM2B0	750	34730JFI2B0	500	34730JF02W0	650				
	0.056			35630JFP2B0	35630JFM2B0		35630JFI2B0							
	0.068			36830JFP2B0	36830JFM2B0		36830JFI2B0							
0.082	11.0 x 18.5 x 18.0	5.5	38230JFP2B0	38230JFM2B0	225	38230JFI2B0	350	-	-					

Notes

- SPQ = Standard Packing Quantity
- (1) Reel diameter = 356 mm is available on request
- (2) H = in-tape height; P₀ = sprocket hole distance; for detailed specifications refer to "Packaging Information"
- (3) Weight for short lead product only
- (4) For tolerances see chapter "Space Requirements for Printed-Circuit Board Applications and Dimension Tolerances"




ELECTRICAL DATA AND ORDERING INFORMATION

U _{RAC} (V)	CAP. (μF)	DIMENSIONS ⁽⁴⁾ w x h x l (mm)	MASS (g) ⁽³⁾	CATALOG NUMBER F340Y2... AND PACKAGING									
				LOOSE IN BOX					TAPED REEL (500 mm) ⁽¹⁾⁽²⁾				
				SHORT LEADS			LONG LEADS						
				l _t = 3.5 mm ± 0.3 mm	l _t = 5.0 mm ± 1.0 mm	SPQ	l _t = 25.0 mm ± 2.0 mm	SPQ	H = 18.5 mm; P ₀ = 12.7 mm	SPQ			
305	PITCH = 22.5 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm; C-TOL. = ± 5 %												
	0.033	6.0 x 15.5 x 26.0	2.4	33330JIP2T0	33330JIM2T0	300	33330JII2B0	250	-	-			
	0.039			33930JIP2T0	33930JIM2T0		33930JII2B0						
	0.047	7.0 x 16.5 x 26.0	2.9	34730JIP2T0	34730JIM2T0	200	34730JII2B0	250					
	0.056			35630JIP2T0	35630JIM2T0		35630JII2B0						
	0.068	8.5 x 18.0 x 26.0	3.8	36830JIP2T0	36830JIM2T0	200	36830JII2B0	250					
	0.082			38230JIP2T0	38230JIM2T0		38230JII2B0						
	0.10	10.0 x 19.5 x 26.0	6.8	41030JIP2T0	41030JIM2T0	200	41030JII2B0	200					
	0.12			41230JIP2T0	41230JIM2T0		41230JII2B0						
	0.15	12.0 x 22.0 x 26.0	7.8	41530JIP2T0	41530JIM2T0	150	41530JII2B0	200					
	0.18			41830JIP2T0	41830JIM2T0		41830JII2B0						
	0.22	12.5 x 22.5 x 26.5	8.4	42230JIP2T0	42230JIM2T0	140	42230JII2B0	200					
	0.27	15.5 x 26.5 x 26.5	14	42730JIP2T0	42730JIM2T0	110	42730JII2B0	275					
	0.33			43330JIP2T0	43330JIM2T0		43330JII2B0						
	PITCH = 27.5 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm; C-TOL. = ± 5 %												
	0.10	9.0 x 19.0 x 31.0	5.5	41030JKP2T0	41030JKM2T0	100	41030JKI2B0	150			-	-	
	0.12			41230JKP2T0	41230JKM2T0		41230JKI2B0						
	0.15	11.0 x 21.0 x 31.0	7.4	41530JKP2T0	41530JKM2T0	100	41530JKI2B0	125					
	0.18			41830JKP2T0	41830JKM2T0		41830JKI2B0						
	0.22	13.0 x 23.0 x 31.0	9.2	42230JKP2T0	42230JKM2T0	100	42230JKI2B0	125					
	0.27	15.0 x 25.0 x 31.0	12.3	42730JKP2T0	42730JKM2T0	100	42730JKI2B0	125					
	0.33	18.0 x 28.0 x 31.0	16.1	43330JKP2T0	43330JKM2T0	100	43330JKI2B0	100					
	0.39			43930JKP2T0	43930JKM2T0		43930JKI2B0						
	0.47	21.0 x 31.0 x 31.0	20.3	44730JKP2T0	44730JKM2T0	50	44730JKI2B0	75					
	0.56			45630JKP2T0	45630JKM2T0		45630JKI2B0						
	0.68	20.0 x 35.0 x 31.0	17.5	46830JKP2T0	46830JKM2T0	50	46830JKI2B0	75					

Notes

- SPQ = Standard Packing Quantity
- (1) Reel diameter = 356 mm is available on request
- (2) H = in-tape height; P₀ = sprocket hole distance; for detailed specifications refer to "Packaging Information"
- (3) Weight for short lead product only
- (4) For tolerances see chapter "Space Requirements for Printed-Circuit Board Applications and Dimension Tolerances"

APPROVALS

SAFETY APPROVALS Y2	VOLTAGE	VALUE	FILE NUMBERS	LINK
EN 60384-14 (ENEC) (= IEC 60384-14 ed-4 (2013))	305 V _{AC}	1 nF to 1 μF	ENEC16/FI/19/10007/M1	www.vishay.com/doc?28253
UL 60384-14 (2 nd edition)	305 V _{AC}	1 nF to 1 μF	E354331	www.vishay.com/doc?28256
CSA-E60384-1:14 (3 rd edition)	305 V _{AC}	1 nF to 1 μF	E354331	www.vishay.com/doc?28256
CQC	305 V _{AC}	1 nF to 1 μF	L-15001128762	www.vishay.com/doc?28251
			F-15001128766	www.vishay.com/doc?28252
CB-test certificate	305 V _{AC}	1 nF to 1 μF	FI-39833/M1	www.vishay.com/doc?28254
The ENEC-approval together with the CB-certificate replace all national marks of the following countries (they have already signed the ENEC-agreement): Austria; Belgium; Czech Republic; Denmark; Finland; France; Germany; Greece; Hungary; Ireland; Italy; Luxembourg; Netherlands; Norway; Portugal; Slovenian; Spain; Sweden, Switzerland, and United Kingdom.				
  				

MOUNTING

Normal Use

The capacitors are designed for mounting on printed-circuit boards. The capacitors packed in bandoliers are designed for mounting in printed-circuit boards by means of automatic insertion machines.

For detailed tape specifications refer to packaging information www.vishay.com/docs?28139

Specific Method of Mounting to Withstand Vibration and Shock

In order to withstand vibration and shock tests, it must be ensured that the stand-off pips are in good contact with the printed-circuit board:


- For original pitch ≤ 15 mm the capacitors shall be mechanically fixed by the leads
- For larger pitches the capacitors shall be mounted in the same way and the body clamped

Space Requirements for Printed-Circuit Board Applications and Dimension Tolerances

For the maximum product dimensions and maximum space requirements for length ($l_{max.}$), width ($w_{max.}$) and height ($h_{max.}$) following tolerances must be taken in account in the envelopment of the components as shown in the drawings below.

- For products with pitch ≤ 15 mm, $\Delta w = \Delta l = 0.3$ mm, and $\Delta h = 0.1$ mm
- For products with $15 \text{ mm} < \text{pitch} \leq 27.5$ mm, $\Delta w = \Delta l = 0.5$ mm, and $\Delta h = 0.1$ mm
- For products with pitch = 37.5 mm, $\Delta w = \Delta l = 0.7$ mm, and $\Delta h = 0.5$ mm

Eccentricity defined as in drawing. The maximum eccentricity is smaller than or equal to the lead diameter of the product concerned.

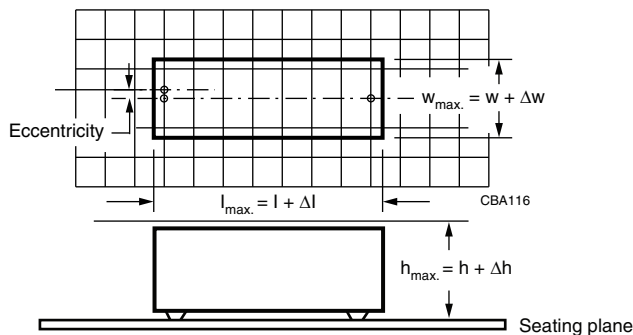

For the minimum product dimensions for length ($l_{min.}$), width ($w_{min.}$), and height ($h_{min.}$) following tolerances of the components are valid:

$l_{min.} = l - \Delta l$, $w_{min.} = w - \Delta w$, and $h_{min.} = h - \Delta h$ following

- For products with pitch ≤ 10 mm, $\Delta l = 0.3$ mm, and $\Delta w = \Delta h = 0.3$ mm
- For products with pitch = 15 mm, $\Delta l = 0.5$ mm, and $\Delta w = \Delta h = 0.5$ mm
- For products with $15 \text{ mm} < \text{pitch} \leq 27.5$ mm, $\Delta l = 1.0$ mm, and $\Delta w = \Delta h = 0.5$ mm
- For products with pitch = 37.5 mm, $\Delta l = 1.0$ mm, and $\Delta w = \Delta h = 1.0$ mm

SOLDERING CONDITIONS

For general soldering conditions and wave soldering profile we refer to the document "Soldering Guidelines for Film Capacitors": www.vishay.com/doc?28171

STORAGE TEMPERATURE

$T_{stg} = -25$ °C to $+35$ °C with RH maximum 75 % without condensation


RATINGS AND CHARACTERISTICS REFERENCE CONDITIONS

Unless otherwise specified, all electrical values apply to an ambient temperature of 23 °C ± 1 °C, an atmospheric pressure of 86 kPa to 106 kPa and a relative humidity of 50 % ± 2 %.


For reference testing, a conditioning period shall be applied over $96 \text{ h} \pm 4 \text{ h}$ by heating the products in a circulating air oven at the rated temperature and a relative humidity not exceeding 20 %.




CHARACTERISTICS

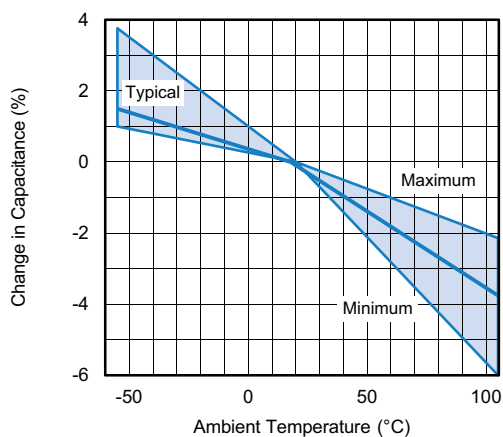


Capacitance as a function of ambient temperature (typical curve)

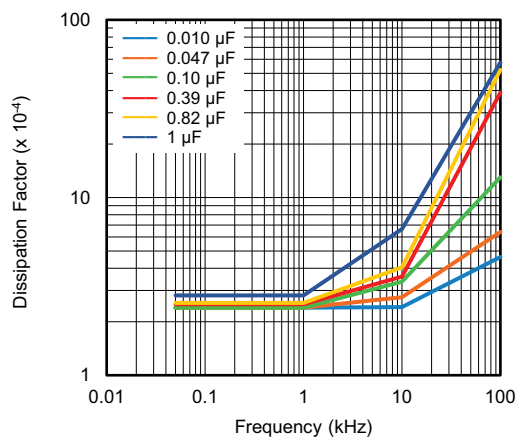


Tangent of loss angle as a function of frequency (typical curve)

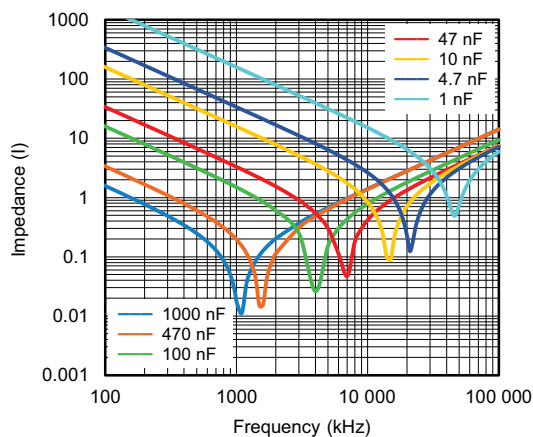


Impedance as a function of frequency (typical curve)

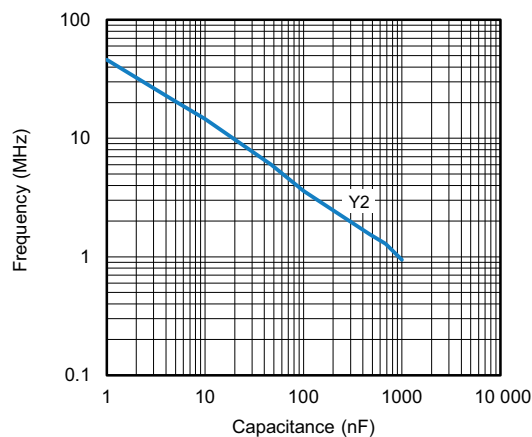


Resonant frequency as a function of capacitance (typical curve)

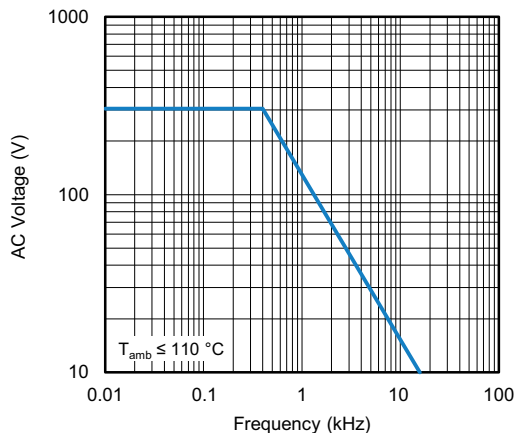

Max. RMS voltage as a function of frequency

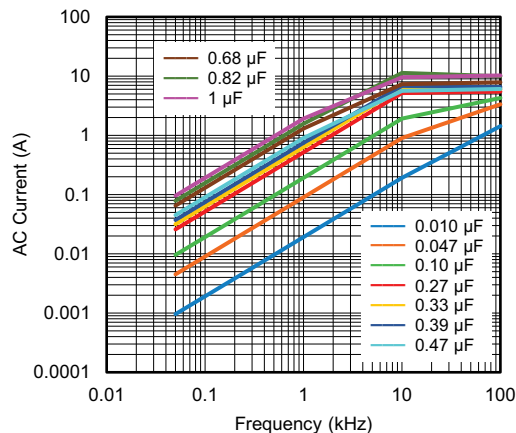

Max. RMS current as a function of frequency

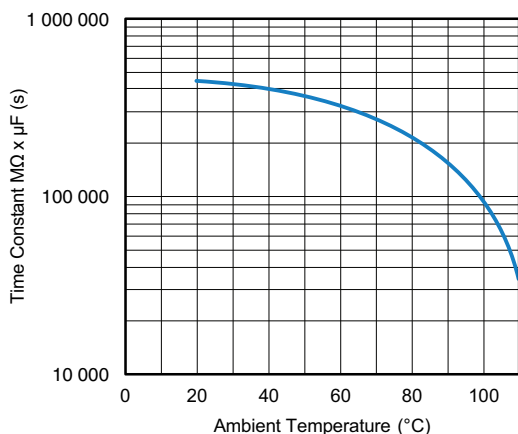

Insulation resistance as a function of ambient temperature
(typical curve)

APPLICATION NOTES

- For Y2 electromagnetic interference suppression in standard line bypass applications (50 Hz / 60 Hz) with a maximum of 305 V_{AC} rated voltage including fluctuation of the mains. It is recommended to use these components in a mains with maximum nominal voltage of 240 V_{AC}. Higher continuous applied voltages will shorten the life time
- For series impedance applications we refer to the application note: www.vishay.com/doc?28153
- To ensure withstanding high humidity requirements in the application it is recommended not to damage the epoxy adhesion at the leads. Therefore the leads may not be damaged or bent before soldering
- For capacitors connected in parallel, normally the proof voltage and possibly the rated voltage must be reduced. For information depending of the capacitance value and the number of parallel connections contact: rfi@vishay.com
- These capacitors are not intended for continuous pulse applications. For these situations, capacitors of the AC and pulse programs must be used
- The maximum ambient temperature must not exceed 105 °C
- Rated voltage pulse slope:
if the pulse voltage is lower than the rated voltage, the values of the specific reference data can be multiplied by 420 V_{DC} and divided by the applied voltage

INSPECTION REQUIREMENTS

General Notes

Sub-clause numbers of tests and performance requirements refer to the “Sectional Specification, Publication IEC 60384-14 ed-3 and Specific Reference Data”.

INSPECTION REQUIREMENTS		
SUB-CLAUSE NUMBER AND TEST	CONDITIONS	PERFORMANCE REQUIREMENTS
SUB-GROUP C1A PART OF SAMPLE OF SUB-GROUP C1		
4.1 Dimensions (detail)		As specified in chapters “General Data” of this specification
Initial measurements	Capacitance Tangent of loss angle: for C ≤ 1 μF at 10 kHz	
4.3 Robustness of terminations	Tensile: load 10 N; 10 s Bending: load 5 N; 4 x 90°	
4.4 Resistance to soldering heat	No pre-drying Method: 1A Solder bath: 280 °C ± 5 °C Duration: 10 s	




INSPECTION REQUIREMENTS		
SUB-CLAUSE NUMBER AND TEST	CONDITIONS	PERFORMANCE REQUIREMENTS
SUB-GROUP C1A PART OF SAMPLE OF SUB-GROUP C1		
4.19 Component solvent resistance	Isopropylalcohol at room temperature Method: 2 Immersion time: 5 min ± 0.5 min Recovery time: min. 1 h, max. 2 h	
4.4.2 Final measurements	Visual examination Capacitance Tangent of loss angle Insulation resistance	No visible damage Legible marking $ \Delta C/C \leq 5\%$ of the value measured initially Increase of $\tan \delta$: ≤ 0.008 for: $C \leq 1 \mu F$ Compared to values measured initially As specified in section "Insulation Resistance" of this specification
SUB-GROUP C1B OTHER PART OF SAMPLE OF SUB-GROUP C1		
Initial measurements	Capacitance Tangent of loss angle: for $C \leq 1 \mu F$ at 10 kHz	
4.20 Solvent resistance of the marking	Isopropyl alcohol at room temperature Method: 1 Rubbing material: cotton wool Immersion time: 5 min ± 0.5 min	No visible damage Legible marking
4.6 Rapid change of temperature	$\theta A = -55\text{ }^{\circ}\text{C}$ $\theta B = +105\text{ }^{\circ}\text{C}$ 5 cycles Duration $t = 30\text{ min}$	
4.6.1 Inspection	Visual examination	No visible damage
4.7 Vibration	Mounting: see section "Mounting" of this specification Procedure B4: frequency range: 10 Hz to 55 Hz Amplitude: 0.75 mm or Acceleration 98 m/s^2 (whichever is less severe) Total duration 6 h	
4.7.2 Final inspection	Visual examination	No visible damage
4.9 Shock	Mounting: see section "Mounting" for more information Pulse shape: half sine Acceleration: 490 m/s^2 Duration of pulse: 11 ms	
4.9.2 Final measurements	Visual examination Capacitance Tangent of loss angle Insulation resistance	No visible damage $ \Delta C/C \leq 5\%$ of the value measured initially Increase of $\tan \delta$: ≤ 0.008 for: $C \leq 1 \mu F$ Compared to values measured initially As specified in section "Insulation Resistance" of this specification



INSPECTION REQUIREMENTS		
SUB-CLAUSE NUMBER AND TEST	CONDITIONS	PERFORMANCE REQUIREMENTS
SUB-GROUP C1 COMBINED SAMPLE OF SPECIMENS OF SUB-GROUPS C1A AND C1B		
4.11 Climatic sequence		
4.11.1 Initial measurements	Capacitance Measured in 4.4.2 and 4.9.2 Tangent of loss angle: measured initially in C1A and C1B	
4.11.2 Dry heat	Temperature: 105 °C	
4.11.3 Damp heat cyclic Test Db First cycle	Duration: 16 h	
4.11.4 Cold	Temperature: -55 °C	
4.11.5 Damp heat cyclic Test Db remaining cycles	Duration: 2 h	
4.11.6 Final measurements	Visual examination Capacitance Tangent of loss angle Voltage proof 2250 V _{DC} ; 1 min between terminations Insulation resistance	No visible damage Legible marking $ \Delta C/C \leq 5\%$ of the value measured in 4.11.1. Increase of $\tan \delta$: ≤ 0.008 for $C \leq 1 \mu\text{F}$ Compared to values measured in 4.11.1 No permanent breakdown or flash-over $\geq 50\%$ of values specified in section "Insulation Resistance" of this specification
SUB-GROUP C2		
4.12 Damp heat steady state	56 days, 40 °C, 90 % to 95 % RH, no load	
4.12.1 Initial measurements	Capacitance Tangent of loss angle at 1 kHz	
4.12.3 Final measurements	Visual examination Capacitance Tangent of loss angle Voltage proof 2250 V _{DC} ; 1 min between terminations Insulation resistance	No visible damage Legible marking $ \Delta C/C \leq 5\%$ of the value measured in 4.12.1. Increase of $\tan \delta$: ≤ 0.008 for $C \leq 1 \mu\text{F}$ Compared to values measured in 4.12.1. No permanent breakdown or flash-over $\geq 50\%$ of values specified in section "Insulation Resistance" of this specification



INSPECTION REQUIREMENTS		
SUB-CLAUSE NUMBER AND TEST	CONDITIONS	PERFORMANCE REQUIREMENTS
SUB-GROUP C2A		
4.12A Damp heat steady state with load	RH: 85 %, temp.: 85 °C, load: 305 V _{AC} Duration: 1000 h	
4.12.1A Initial measurements	Capacitance Tangent of loss angle: for C ≤ 1 µF at 10 kHz	
4.12.3A Final measurements	Visual examination	No visible damage Legible marking
	Capacitance	$ \Delta C/C \leq 10\%$ of the value measured in 4.12.1A.
	Tangent of loss angle	Increase of tan δ: ≤ 0.0240 for C ≤ 1 µF at 10 kHz Compared to values measured in 4.12.1A.
	Insulation resistance	≥ 50 % of values specified in section "Insulation Resistance" of this specification
SUB-GROUP C3		
4.13.1 Initial measurements	Capacitance Tangent of loss angle: for C ≤ 1 µF at 10 kHz	
4.13 Impulse voltage	3 successive impulses, full wave, peak voltage: Y2: 5 kV for C ≤ 1 µF Max. 24 pulses	No self healing breakdowns or flash-over
4.14 Endurance	Duration: 1000 h 1.7 x U _{RAC} at 105 °C Once in every hour the voltage is increased to 1000 V _{RMS} for 0.1 s via resistor of 47 Ω ± 5 %	
4.14.7 Final measurements	Visual examination	No visible damage Legible marking
	Capacitance	$ \Delta C/C \leq 10\%$ compared to values measured in 4.13.1.
	Tangent of loss angle	Increase of tan δ: ≤ 0.008 for C ≤ 1 µF Compared to values measured in 4.13.1
	Voltage proof 2250 V _{DC} ; 1 min between terminations 2110 V _{AC} ; 1 min between terminations and case	No permanent breakdown or flash-over
	Insulation resistance	≥ 50 % of values specified in section "Insulation Resistance" of this specification

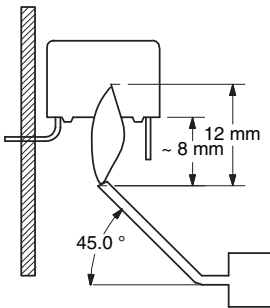INSPECTION REQUIREMENTS														
SUB-CLAUSe NUMBER AND TEST	CONDITIONS	PERFORMANCE REQUIREMENTS												
SUB-GROUP C4														
4.15 Charge and discharge	10 000 cycles Charged to 420 V _{DC} Discharge resistance: $R = \frac{420 V_{DC}}{1.5 \times C (du/dt)}$													
4.15.1 Initial measurements	Capacitance Tangent of loss angle: for C ≤ 1 µF at 10 kHz for C > 1 µF at 1 kHz													
4.15.3 Final measurements	Capacitance Tangent of loss angle Insulation resistance	$ \Delta C/C \leq 10 \%$ compared to values measured in 4.15.1. Increase of tan δ: ≤ 0.008 for: C ≤ 1 µF Compared to values measured in 4.15.1 ≥ 50 % of values specified in section "Insulation Resistance" of this specification												
SUB-GROUP C5														
4.16 Radio frequency characteristic	Resonance frequency	≥ 0.9 times the value as specified in section "Resonant Frequency" of this specification												
SUB-GROUP C6														
4.17 Passive flammability Class B for volume > 1750 mm ³ Class C for volume ≤ 1750 mm ³	Bore of gas jet: Ø 0.5 mm Fuel: butane Test duration for actual volume V in mm ³ : <table> <tr> <td></td><td>Class B</td><td>Class C</td></tr> <tr> <td>250 < V ≤ 500:</td><td>-</td><td>10 s</td></tr> <tr> <td>500 < V ≤ 1750:</td><td>-</td><td>20 s</td></tr> <tr> <td>V > 1750:</td><td>60 s</td><td>-</td></tr> </table> One flame application: 		Class B	Class C	250 < V ≤ 500:	-	10 s	500 < V ≤ 1750:	-	20 s	V > 1750:	60 s	-	After removing test flame from capacitor, the capacitor must not continue to burn for more than 10 s (class B) and more than 30 s (class C). No burning particle must drop from the sample.
	Class B	Class C												
250 < V ≤ 500:	-	10 s												
500 < V ≤ 1750:	-	20 s												
V > 1750:	60 s	-												
SUB-GROUP C7														
4.18 Active flammability	20 cycles of 5 kV discharges on the test capacitor connected to U _{RAC}	The cheese cloth around the capacitors shall not burn with a flame. No electrical measurements are required.												

**AUTOMOTIVE AEC-Q200, REVISION D QUALIFICATION**

STRESS	REVISION	CONDITION	SAMPLE SIZE	PERFORMANCE REQUIREMENTS
1. High temperature exposure (storage)	D	Temp.: 105 °C; unpowered 250 h / 500 h / 1000 h	77	$ \Delta C/C \leq 5\%$ Increase of $\tan \delta$: ≤ 0.008 for $C \leq 1 \mu F$ at 10 kHz Increase of $\tan \delta$: ≤ 0.005 for $C > 1 \mu F$ at 1 kHz IR > 50 % of initial specified value
2. Temperature cycling	D	Total no. of cycles: 1000 cycles Lower temp.: -55 °C Upper temp.: +105 °C 30 min dwell time at each temperature Transition time < 1 min	77	$ \Delta C/C \leq 5\%$ Increase of $\tan \delta$: ≤ 0.008 for $C \leq 1 \mu F$ at 10 kHz IR > 50 % of initial specified value
3. Moisture resistance		No. of cycle: 10 cycles $t = 24$ h/cycle	77	$ \Delta C/C \leq 5\%$ Increase of $\tan \delta$: ≤ 0.008 for $C \leq 1 \mu F$ at 10 kHz IR > 50 % of initial specified value
4. Biased humidity AC	D	Temp.: 40 °C; RH: 93 %; U_{RAC} 250 h / 500 h / 1000 h	77	$ \Delta C/C \leq 10\%$ Increase of $\tan \delta$: ≤ 0.008 for $C \leq 1 \mu F$ at 10 kHz IR > 50 % of initial specified value
5. Operational life AC	D	Temp. = 105 °C; U_{RAC} 1000 h	77	$ \Delta C/C \leq 10\%$ Increase of $\tan \delta$: ≤ 0.008 for $C \leq 1 \mu F$ at 10 kHz IR > 50 % of initial specified value
6. Terminal strength (lead)	D	Test leaded device lead integrity only. - A (pull-test): 2.27 kg (10 s) - C (wire-lead bend test): 227 g (3 x 3 s)	30	No visual damage
7. Resistance to solvents	D	MIL-STD-202 method 215. - Also aqueous chemical - OKEM clean or equivalent. Do not use banned solvents.	5	No visual damage Legible marking
8. Mechanical shock	D	100 g's ; 6 ms half-sine; 3.75 m/s	30	No visual damage
9. Vibration	D	5 g's for 20 min 12 cycles x 3 directions 10 Hz to 2000 Hz	30	No visual damage
10. Resistance to soldering heat	D	Temp.: 280 °C; time: 10 s solder within 1.5 mm of device body	30	$ \Delta C/C \leq 5\%$ Increase of $\tan \delta$: ≤ 0.008 for $C \leq 1 \mu F$ at 10 kHz IR > 50 % of initial specified value
11. Solderability	D	Leaded: method A at 235 °C, category 3 (245 °C / 3 s)	15	Good tinning as evidence by free flowing of the solder with wetting of terminations > 95 %
12. Electrical characterization		-	30	-
13. Flammability		One flame application Class B	15	V-0 or V-1 are acceptable. Class B or C according IEC is also acceptable



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.