




Commercial Inductors, Low Inductance Design, Ultra Low DCR, Options for High Temperature 155 °C or High Saturation Rating

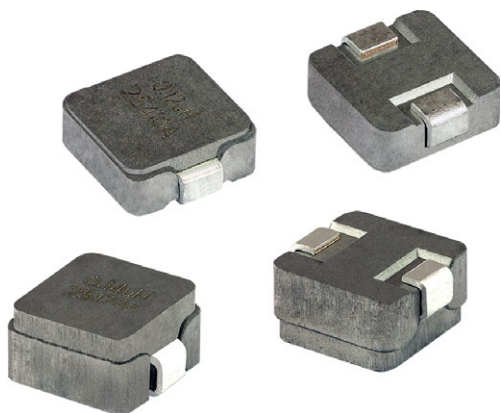

FEATURES

- Size: 5.08 mm x 5.08 mm footprint (2.0 mm and 3.0 mm height options)
- Core material options for high temperature or high saturation rating
- Magnetically shielded construction
- Ideal for high frequency switching converters with high current load demands
- Patented coil design achieves ultra low DCR and robust design
- Handles high transient in-rush currents without saturation
- IHSR design; PATENT(S): www.vishay.com/patents
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE
GREEN
(5-2008)

LINKS TO ADDITIONAL RESOURCES



APPLICATIONS

- Multiphase DC/DC converters for microprocessors
- High current LC filters
- LiDAR boost inductor for laser diode with GaN FETs
- Energy storage inductor for high frequency, low voltage converters (12 V to 1 V)


STANDARD ELECTRICAL SPECIFICATIONS							
PART NUMBER	L ₀ INDUCTANCE ± 20 % AT 100 kHz, 0.25 V, 0 A (µH)	DCR TYP. AT 25 °C (mΩ)	DCR MAX. AT 25 °C (mΩ)	HEAT RATING CURRENT DC TYP. (A) ⁽¹⁾	SATURATION CURRENT DC TYP. ⁽²⁾ (A)		SRF TYP. (MHz)
					20 % DROP	30 % DROP	
BEST SATURATION AND 2 mm HEIGHT							
IHSR2020BZEKR10M01	0.100	2.7	2.9	24	37	44	342
BEST SATURATION AND 3 mm HEIGHT							
IHSR2020CZEK56NM01	0.056	0.6	0.6	65	73	97	513
IHSR2020CZEK82NM01	0.082	1.0	1.0	41	57	76	375
IHSR2020CZEKR11M01	0.110	2.7	2.9	24	44	49	315
HIGHEST TEMPERATURE RATING (155 °C) AND 2 mm HEIGHT							
IHSR2020BZEKR12M31	0.120	2.7	2.9	23	20	30	197
HIGHEST TEMPERATURE RATING (155 °C) AND 3 mm HEIGHT							
IHSR2020CZEK68NM31	0.068	0.6	0.6	63	30	46	277
IHSR2020CZEKR10M31	0.100	1.0	1.0	37	26	39	205
IHSR2020CZEKR14M31	0.140	2.7	2.9	23	20	30	158

Notes

- All test data is referenced to 25 °C ambient
- Operating temperature range -55 °C to +125 °C (for -A1 models) and up to +155 °C (for -3A models)
- ⁽¹⁾ DC current (A) that will cause an approximate ΔT of 40 °C
- ⁽²⁾ DC current (A) that will cause L₀ to drop approximately 20 % and 30 %, respectively

PATENT(S): www.vishay.com/patents

This Vishay product is protected by one or more United States and international patents.

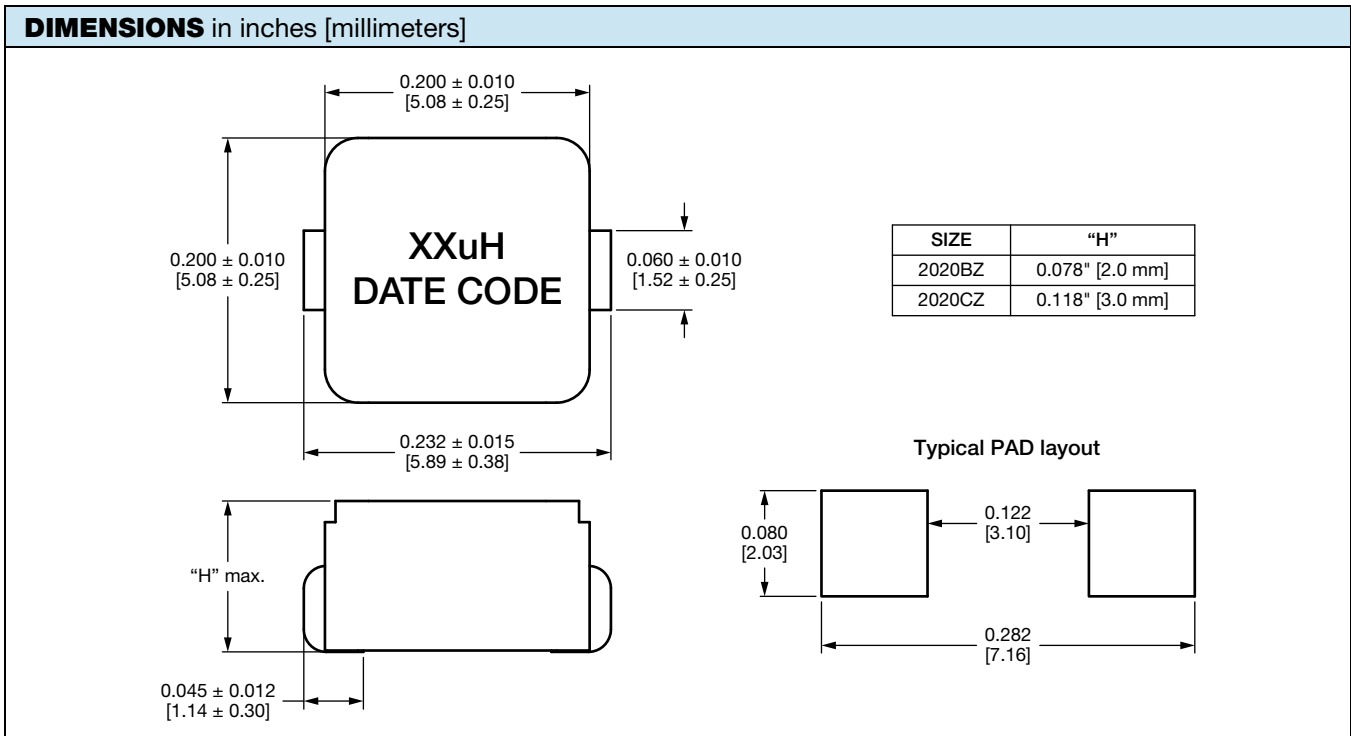

DESCRIPTION				
IHSR2020CZ-01	0.082 μ H	$\pm 20\%$	EK	e3
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC® LEAD (Pb)-FREE STANDARD









GLOBAL PART NUMBER					
I H S R	2 0 2 0 C Z	E K	8 2 N	M	0 1
PRODUCT FAMILY	SIZE	PACKAGE CODE	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	SERIES
		EK = tape and reel	82N = 0.082 μ H	M = $\pm 20\%$	

Note

- For additional packaging details see "[Packaging Methods](#)"











PERFORMANCE GRAPHS

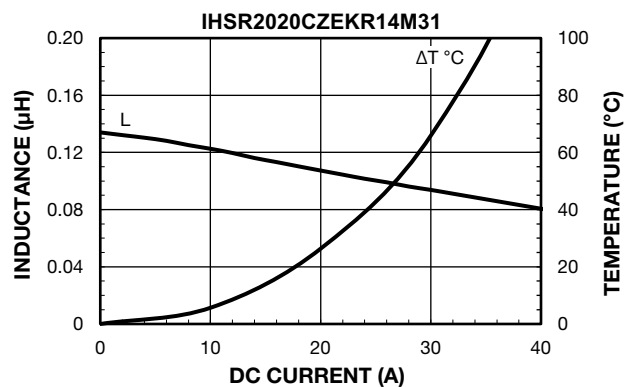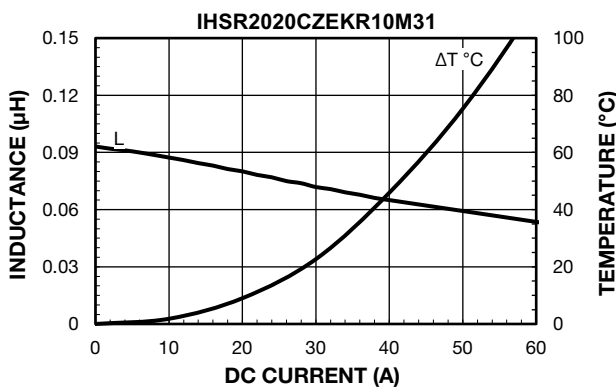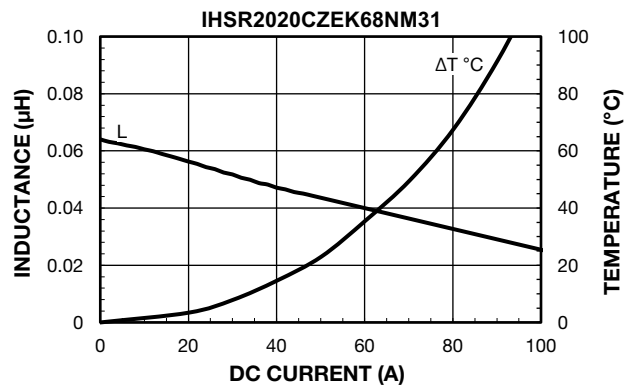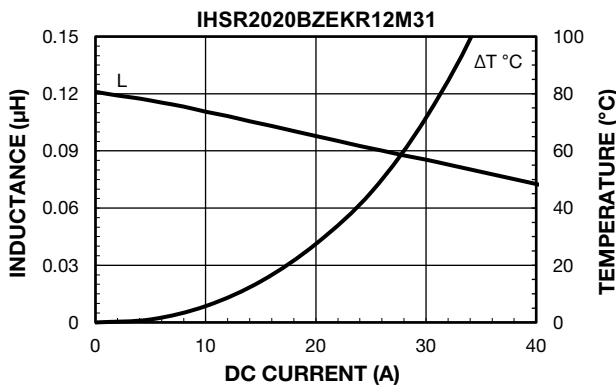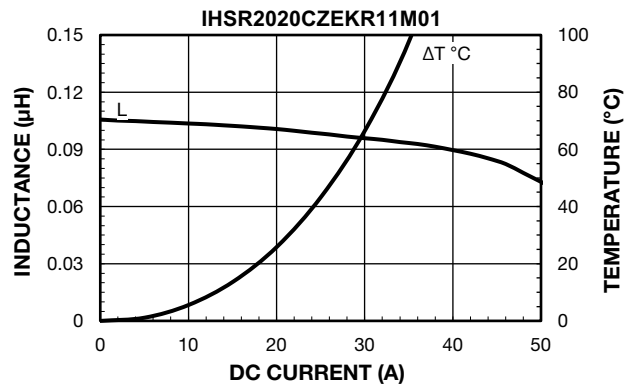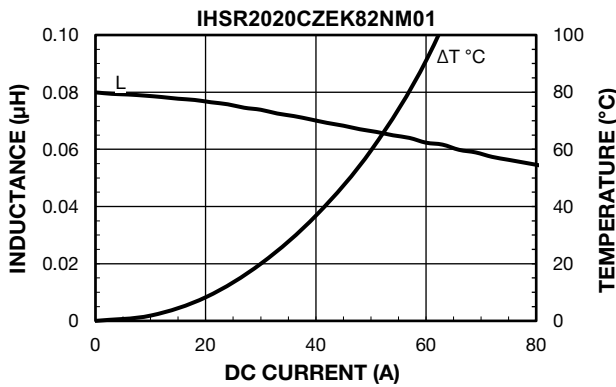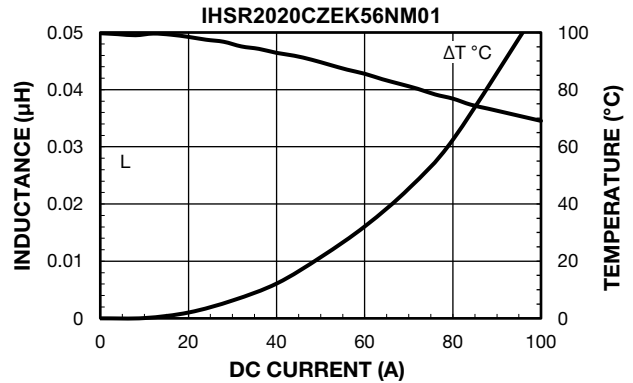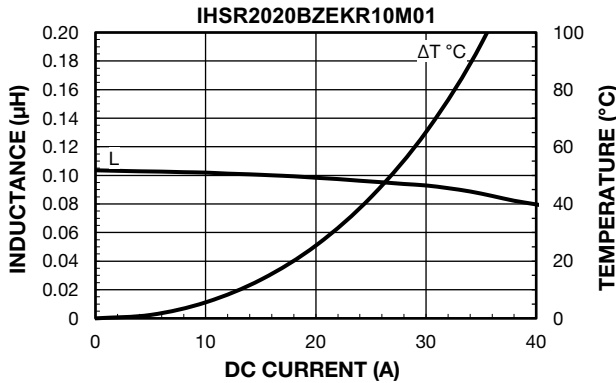



PERFORMANCE GRAPHS: INDUCTANCE AND Q VS. FREQUENCY

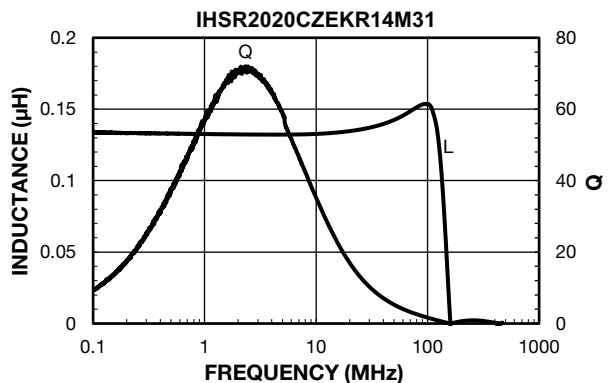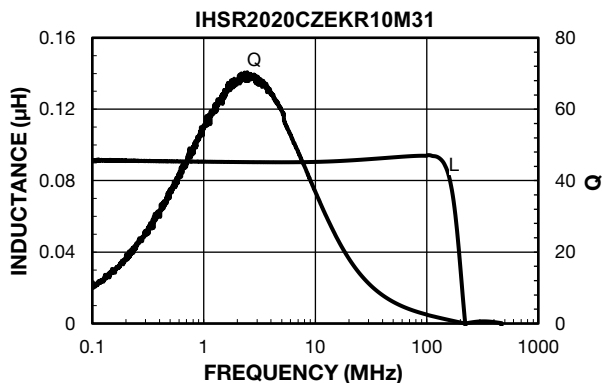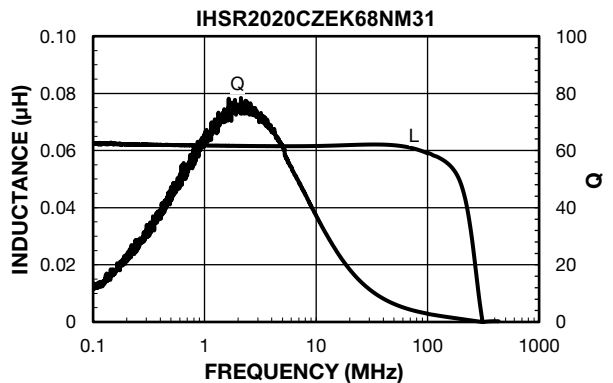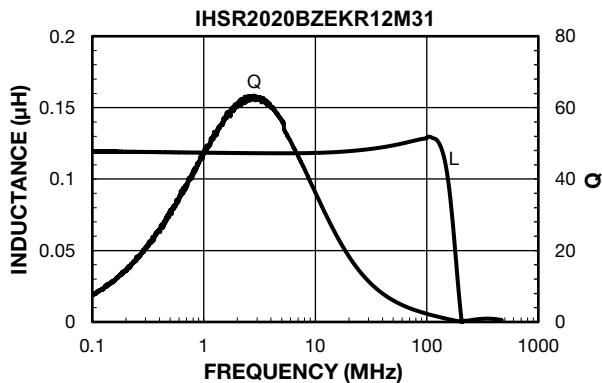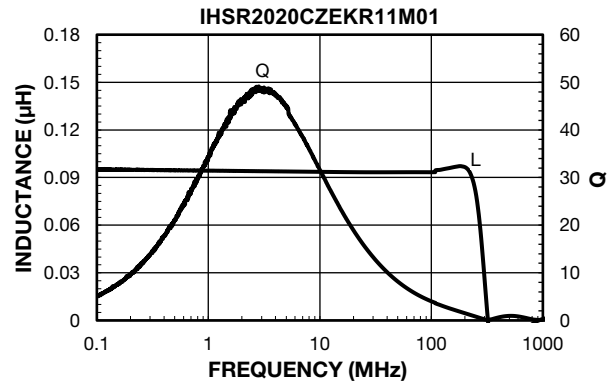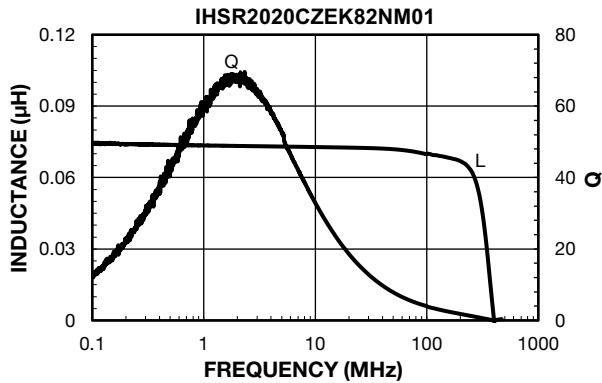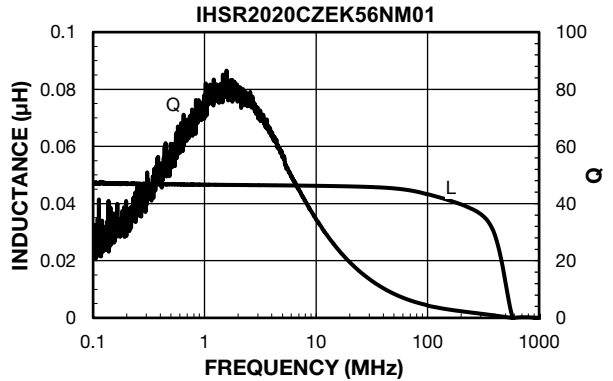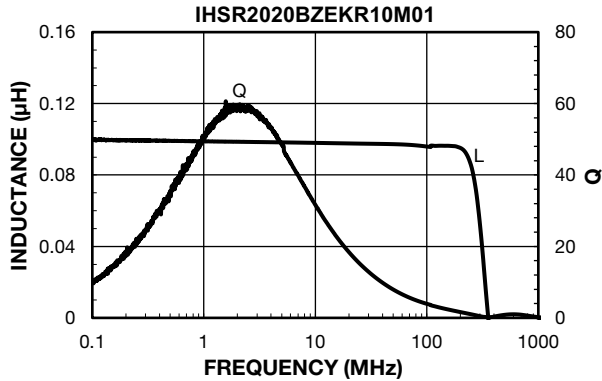



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.