"Half Bridge" High Speed IGBT INT-A-PAK, 200 A

INT-A-PAK IGBT

FEATURES

- Trench IGBT technology
- Gen 4 FRED Pt® anti-parallel diodes with ultra soft reverse recovery characteristics
- Very low switching losses
- Al_2O_3 DBC
- UL approved file E78996
- Designed for industrial level
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912

Pb-free
RoHS COMPLIANT

BENEFITS

- Optimized for high current inverter stages
- Direct mounting on heatsink
- Very low junction to case thermal resistance
- Low EMI

PRIMARY CHARACTERISTICS	
V_{CES}	650 V
I_C (DC) at T_C = 80 °C	144 A
$V_{CE(on)}$ (typical) at I_C = 200 A, T_J = 25 °C	1.83 V
Chip level $V_{CE(on)}$ at 200 A, 25 °C	1.70 V
Speed	8 kHz to 30 kHz
Package	INT-A-PAK
Circuit configuration	Half bridge

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	TEST CONDITIONS	MAX.	UNITS
Collector to emitter voltage	V_{CES}		650	V
Continuous collector current	I_C	T_C = 25 °C	193	A
		T_C = 80 °C	144	
Pulsed collector current	I_{CM}	T_J = 175 °C, t_p = 6 ms, V_{GE} = 15 V	450	
Clamped inductive load current	I_{LM}		405	
Diode continuous forward current	I_F	T_C = 25 °C	144	
		T_C = 80 °C	108	
Maximum non-repetitive peak current	I_{FSM}	10 ms sine or 6 ms rectangular pulse	1080	
Gate to emitter voltage	V_{GE}		± 20	V
Maximum power dissipation (IGBT)	P_D	T_C = 25 °C	517	W
		T_C = 80 °C	328	
Maximum power dissipation (Diode)	P_D	T_C = 25 °C	366	
		T_C = 80 °C	232	
RMS isolation voltage	V_{ISOL}	Any terminal to case, t = 1 min	2500	V
Operating junction temperature range	T_J		-40 to +175	°C
Storage temperature range	T_{STG}		-40 to +150	°C

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

ELECTRICAL SPECIFICATIONS (T_J = 25 °C unless otherwise noted)						
PARAMETER	**SYMBOL**	**TEST CONDITIONS**	**MIN.**	**TYP.**	**MAX.**	**UNITS**
Collector to emitter breakdown voltage	$V_{(BR)CES}$	V_{GE} = 0 V, I_C = 400 μA	650	-	-	V
Collector to emitter voltage	$V_{CE(on)}$	V_{GE} = 15 V, I_C = 100 A	-	1.46	-	
		V_{GE} = 15 V, I_C = 200 A	-	1.83	2.3	
		V_{GE} = 15 V, I_C = 100 A, T_J = 125 °C	-	1.59	-	
		V_{GE} = 15 V, I_C = 200 A, T_J = 125 °C	-	2.13	-	
Gate threshold voltage	$V_{GE(th)}$	V_{CE} = V_{GE}, I_C = 2.0 mA	3	3.9	5	
Temperature coefficient of threshold voltage	$\Delta V_{GE(th)}/\Delta T_J$	V_{CE} = V_{GE}, I_C = 2.0 mA (25 °C to 125 °C)	-	-10	-	mV/°C
Forward transconductance	g_{fe}	V_{CE} = 20 V, I_C = 200 A	-	238	-	S
Transfer characteristics	V_{GE}	V_{CE} = 20 V, I_C = 200 A	-	6.3	-	V
Collector to emitter leakage current	I_{CES}	V_{GE} = 0 V, V_{CE} = 650 V	-	0.2	100	μA
		V_{GE} = 0 V, V_{CE} = 650 V, T_J = 125 °C	-	0.1	-	mA
Diode forward voltage drop	V_{FM}	I_{FM} = 100 A	-	1.73	2.5	V
		I_{FM} = 200 A	-	2.05	-	
		I_{FM} = 100 A, T_J = 125 °C	-	1.37	-	
		I_{FM} = 200 A, T_J = 125 °C	-	1.75	-	
Gate to emitter leakage current	I_{GES}	V_{GE} = ± 20 V	-	-	240	nA

SWITCHING CHARACTERISTICS						
PARAMETER	**SYMBOL**	**TEST CONDITIONS**	**MIN.**	**TYP.**	**MAX.**	**UNITS**
Total gate charge (turn-on)	Q_g	I_C = 200 A V_{CC} = 520 V V_{GE} = 15 V	-	488	-	nC
Gate to emitter charge (turn-on)	Q_{ge}		-	58	-	
Gate to collector (turn-on)	Q_{gc}		-	137	-	
Turn-on switching loss	E_{on}	V_{CC} = 325 V, I_C = 200 A, R_g = 27 Ω, L = 500 μH, V_{GE} = ±15 V	-	2.34	-	mJ
Turn-off switching loss	E_{off}		-	3.77	-	
Total switching loss	E_{tot}		-	6.11	-	
Turn-on delay time	$t_{d(on)}$		-	111	-	ns
Rise time	t_r		-	120	-	
Turn-off delay time	$t_{d(off)}$		-	454	-	
Fall time	t_f		-	64	-	
Turn-on switching loss	E_{on}	V_{CC} = 325 V, I_C = 200 A, R_g = 27 Ω, L = 500 μH, V_{GE} = ±15 V T_J = 125 °C	-	2.82	-	mJ
Turn-off switching loss	E_{off}		-	3.86	-	
Total switching loss	E_{tot}		-	6.68	-	
Turn-on delay time	$t_{d(on)}$		-	79	-	ns
Rise time	t_r		-	82	-	
Turn-off delay time	$t_{d(off)}$		-	306	-	
Fall time	t_f		-	34	-	
Reverse bias safe operating area	RBSOA	I_C = 405 A, R_g = 27 Ω, V_{CC} = 325 V, V_p = 650 V, V_{GE} = 15 V to -5 V, T_J = 175 °C	Fullsquare			
Diode reverse recovery time	t_{rr}	I_F = 50 A, dI_F/dt = 500 A/μs V_{rr} = 200 V, T_J = 25 °C	-	72	-	ns
Diode peak reverse current	I_{rr}		-	13	-	A
Diode recovery charge	Q_{rr}		-	466	-	nC
Diode reverse recovery time	t_{rr}	I_F = 50 A, dI_F/dt = 500 A/μs V_{rr} = 200 V, T_J = 125 °C	-	146	-	ns
Diode peak reverse current	I_{rr}		-	28	-	A
Diode recovery charge	Q_{rr}		-	2064	-	nC

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

THERMAL AND MECHANICAL SPECIFICATIONS							
PARAMETER		SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Operating junction temperature range		T_J		-40	-	175	°C
Storage temperature range		T_{Stg}		-40	-	150	
Junction to case per leg	IGBT	R_{thJC}		-	-	0.29	°C/W
	Diode			-	-	0.41	
Case to sink per module (conductive grease applied)		R_{thCS}		-	0.05	-	
Mounting torque	case to heatsink			-	-	4	Nm
	case to terminal 1, 2, 3			-	-	3	
Weight				-	150	-	g

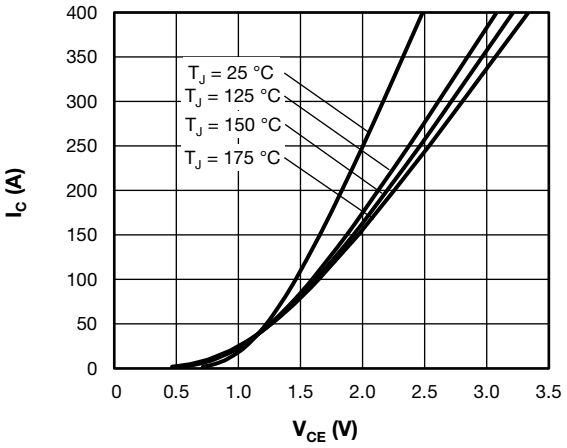

Fig. 1 - Typical Trench IGBT Output Characteristics, V_{GE} = 15 V

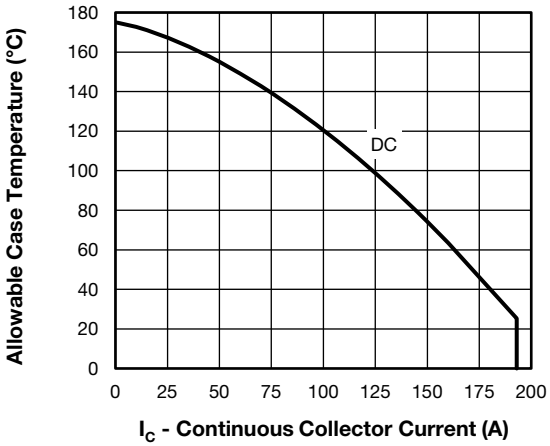

Fig. 3 - Maximum Trench IGBT Continuous Collector Current vs. Case Temperature

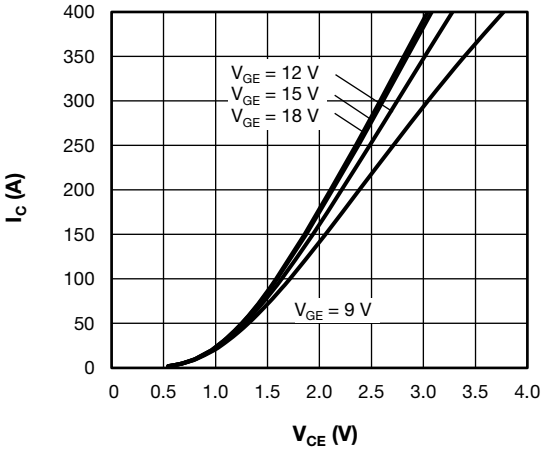

Fig. 2 - Typical Trench IGBT Output Characteristics, T_J = 125 °C

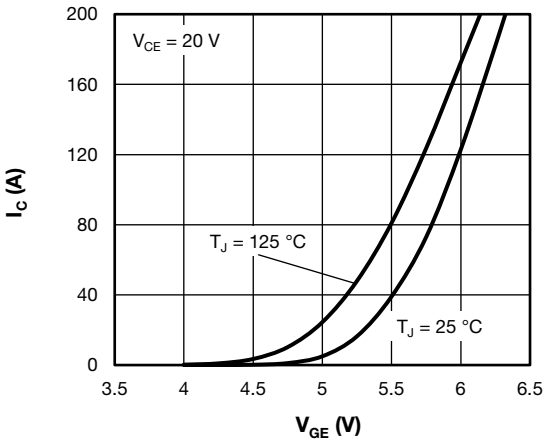

Fig. 4 - Typical Trench IGBT Transfer Characteristics

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

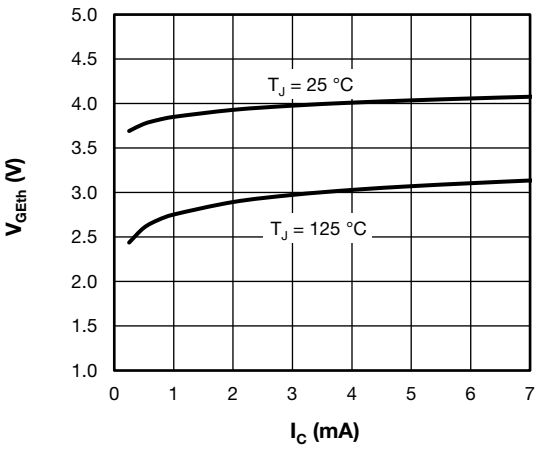

Fig. 5 - Typical Trench IGBT Gate Threshold Voltage

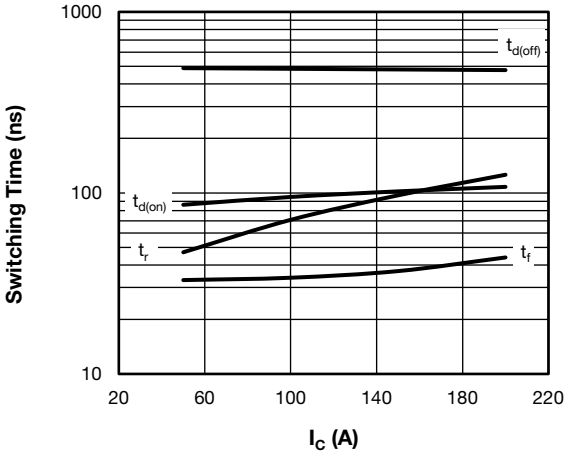

Fig. 8 - Typical Trench IGBT Switching Time vs. I_C
(with Antiparallel Diode)
T_J = 125 °C, V_{CC} = 325 V, R_g = 27 Ω, V_{GE} = +15 V/-15 V, L = 500 μH

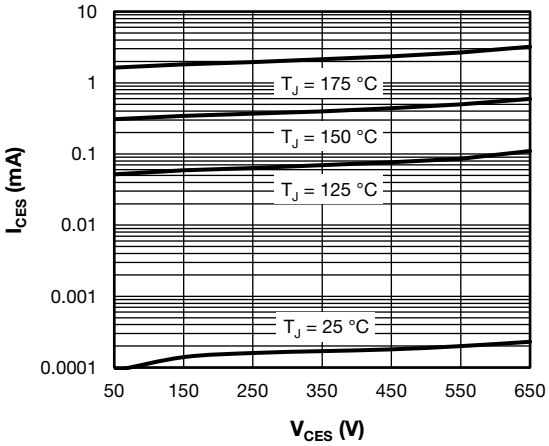

Fig. 6 - Typical Trench IGBT Zero Gate Voltage Collector Current

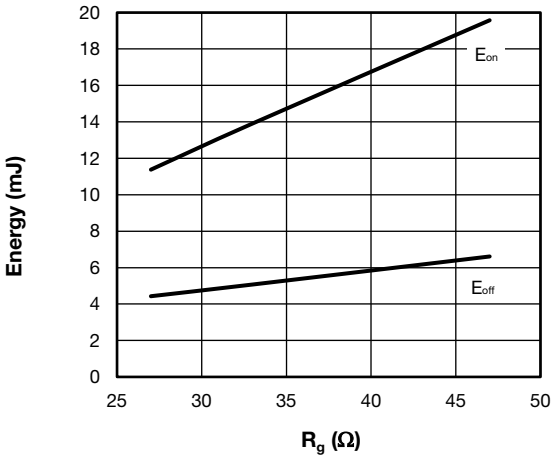

Fig. 9 - Typical Trench IGBT Energy Loss vs. R_g
(with Antiparallel Diode)
T_J = 125 °C, V_{CC} = 325 V, I_C = 200 A, V_{GE} = +15 V/-15 V, L = 500 μH

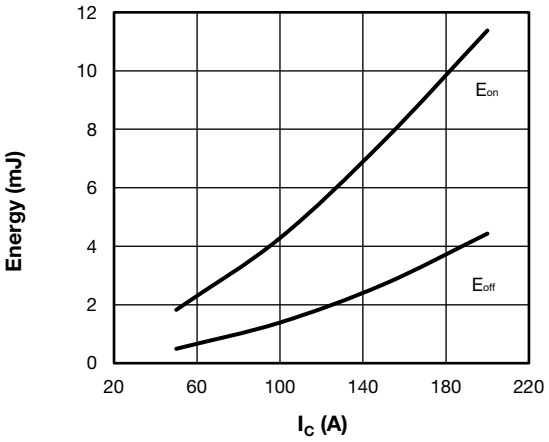

Fig. 7 - Typical Trench IGBT Energy Loss vs. I_C
(with Antiparallel Diode)
T_J = 125 °C, V_{CC} = 325 V, R_g = 27 Ω, V_{GE} = +15 V/-15 V, L = 500 μH

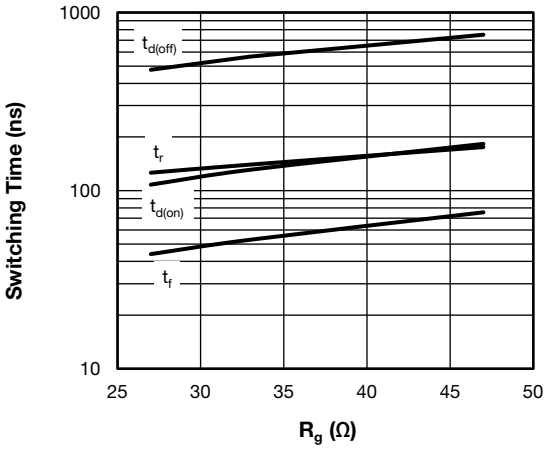

Fig. 10 - Typical Trench IGBT Switching Time vs. R_g
(with Antiparallel Diode)
T_J = 125 °C, V_{CC} = 325 V, I_C = 200 A, V_{GE} = +15 V/-15 V, L = 500 μH

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

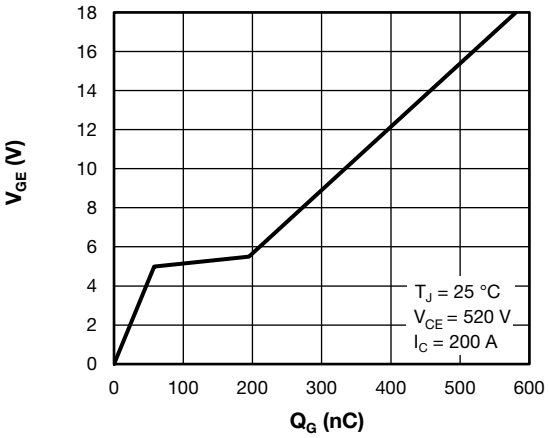

Fig. 11 - Typical Trench IGBT Gate Charge vs. Gate to Collector Voltage

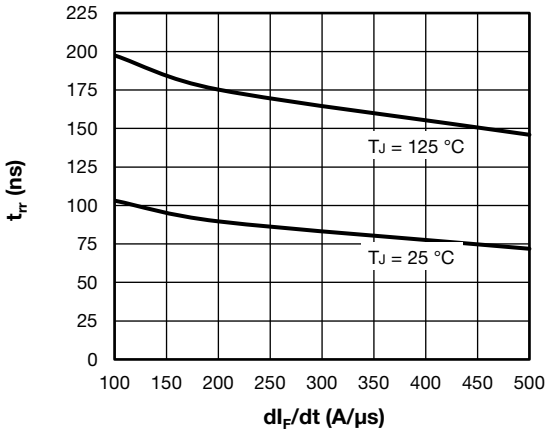

Fig. 14 - Typical Antiparallel Diode Reverse Recovery Time vs. dI_Fdt
I_F = 50 A, V_{CC} = 200 V

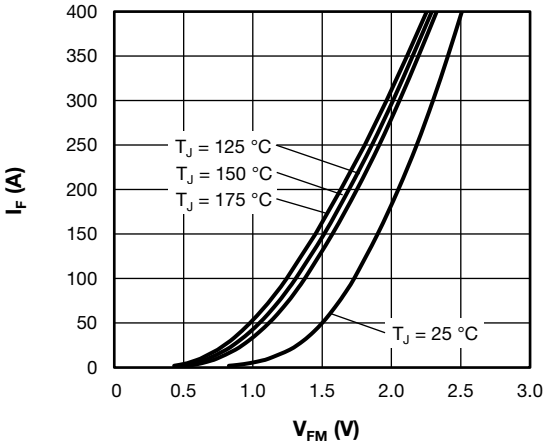

Fig. 12 - Typical Antiparallel Diode Forward Characteristics

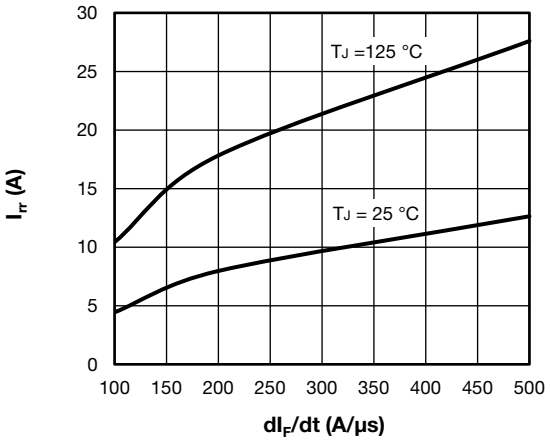

Fig. 15 - Typical Antiparallel Diode Reverse Recovery Current vs. dI_Fdt
I_F = 50 A, V_{CC} = 200 V

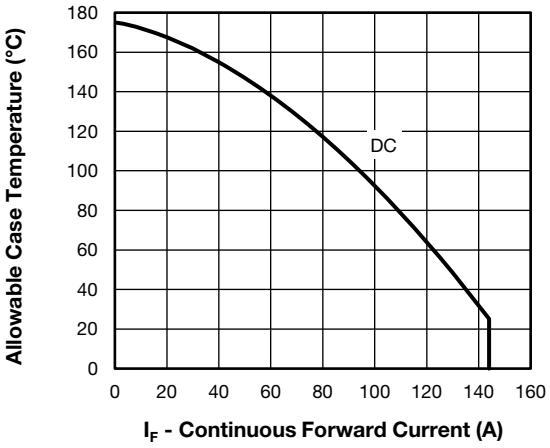

Fig. 13 - Maximum Antiparallel Diode Continuous Forward Current vs. Case Temperature

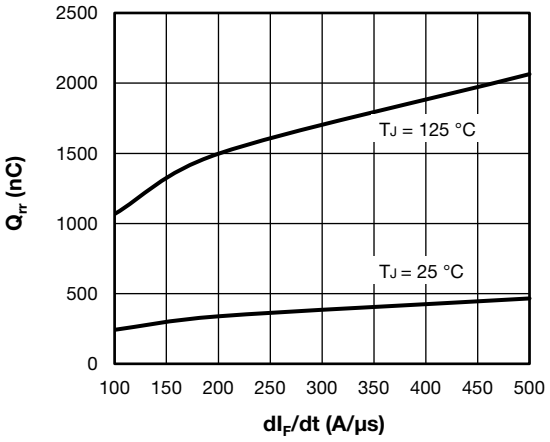

Fig. 16 - Typical Antiparallel Diode Reverse Recovery Charge vs. dI_Fdt
I_F = 50 A, V_{CC} = 200 V

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

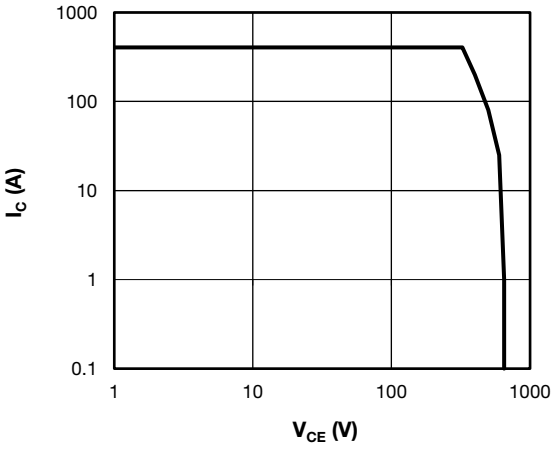

Fig. 17 - Trench IGBT Reverse BIAS SOA
T_J = 175 °C, I_C = 405 A, R_g = 27 Ω, V_{GE} = +15 V/-5 V, V_{CC} = 325 V, V_p = 650 V

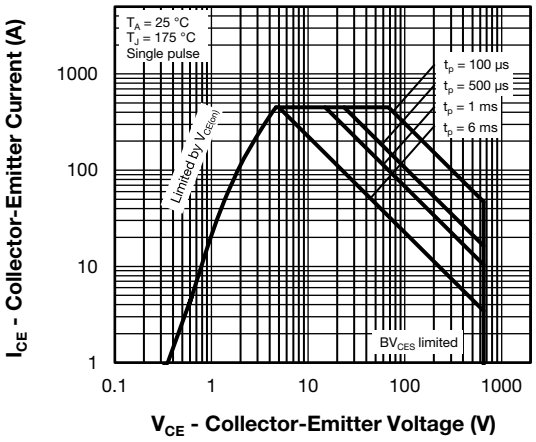

Fig. 18 - Trench IGBT Safe Operating Area

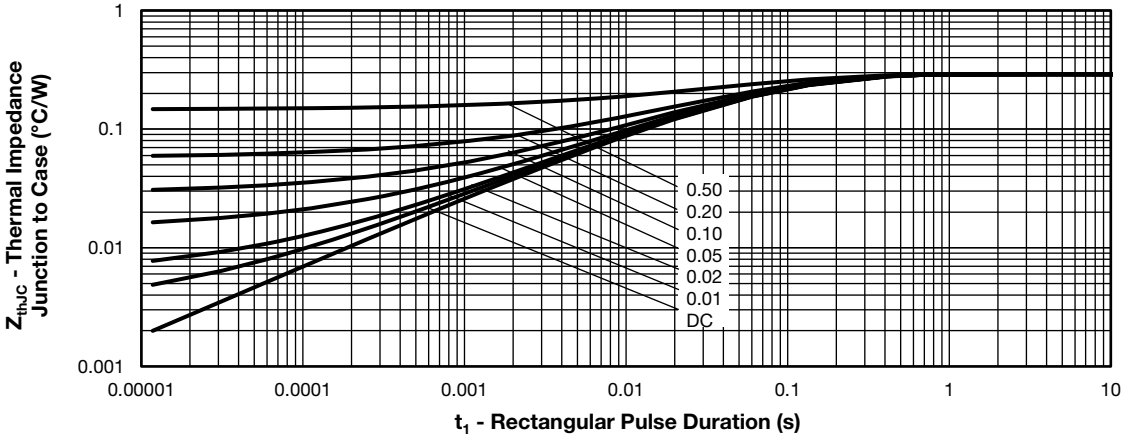

Fig. 19 - Maximum Trench IGBT Thermal Impedance Z_{thJC} Characteristics

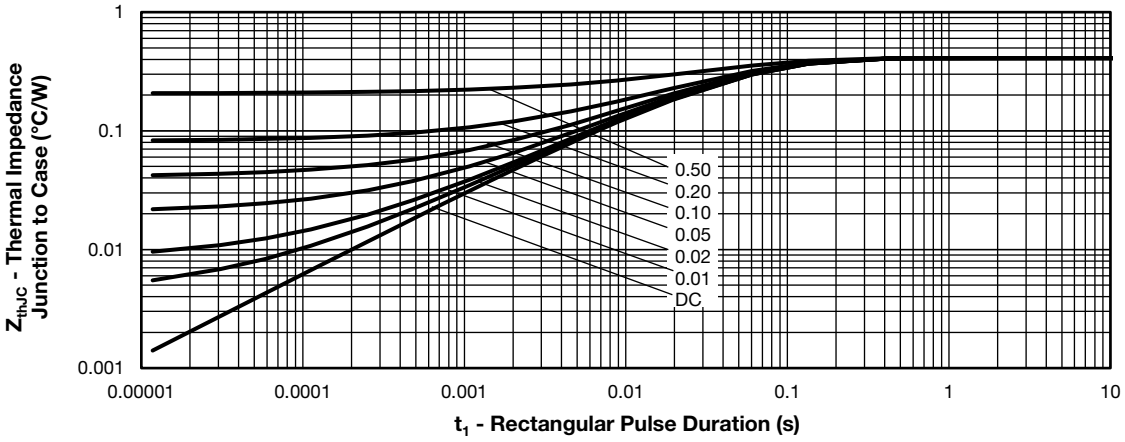

Fig. 20 - Maximum Antiparallel Diode Thermal Impedance Z_{thJC} Characteristics

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

ORDERING INFORMATION TABLE

Device code	VS-	G	T	200	T	S	065	N
	1	2	3	4	5	6	7	8

1	-	Vishay Semiconductors product
2	-	Insulated gate bipolar transistor (IGBT)
3	-	T = trench IGBT
4	-	Current rating (200 = 200 A)
5	-	Circuit configuration (T = half bridge)
6	-	Package indicator (S = INT-A-PAK IGBT)
7	-	Voltage rating (065 = 650 V)
8	-	Speed/type (N = ultrafast IGBT)

CIRCUIT CONFIGURATION

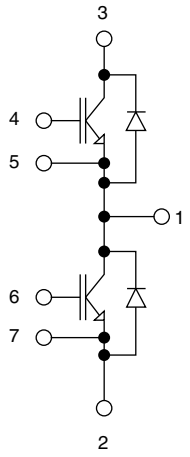

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

DIMENSIONS in millimeters

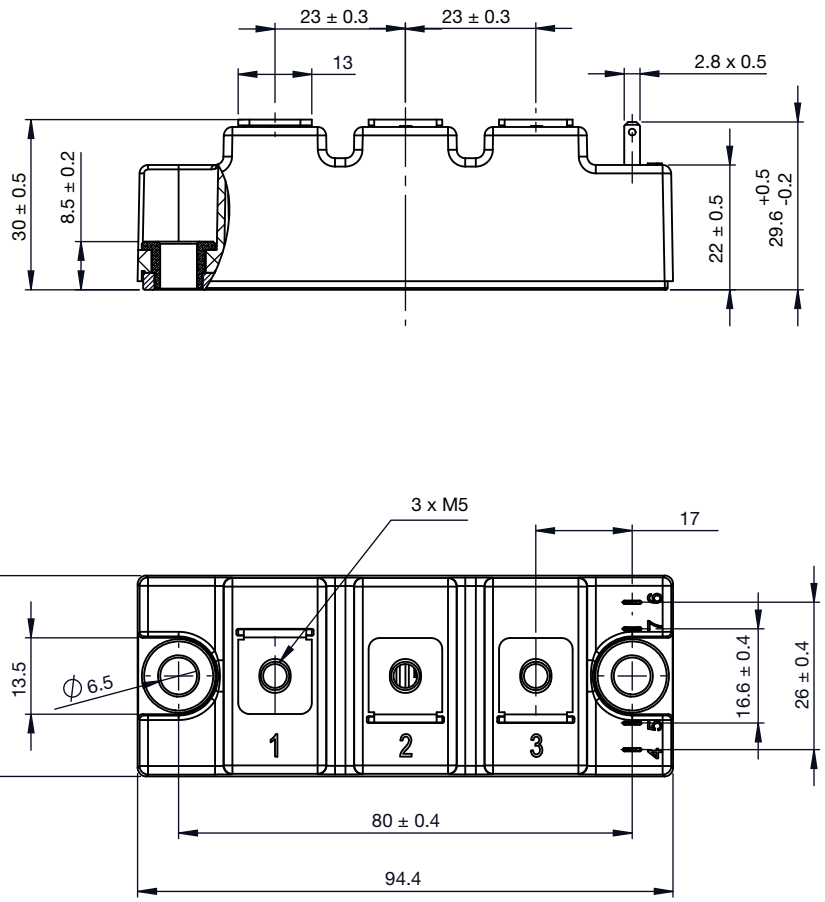

General tolerance ± 0.5 mm

For technical questions within your region: DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

© 2024 VISHAY INTERTECHNOLOGY, INC. ALL RIGHTS RESERVED

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000